Self Protected Very Low Iq High Side Driver with Analog Current Sense

NCV84045



SOIC−8
CASE 751−07
STYLE 11

The NCV84045 is a fully protected single channel high side driver that can be used to switch a wide variety of loads, such as bulbs, solenoids, and other actuators. The device incorporates advanced protection features such as active inrush current management, over−temperature shutdown with automatic restart and an overvoltage active clamp. A dedicated Current Sense pin provides precision analog current monitoring of the output as well as fault indication of short to V_D, short circuit to ground and OFF state open load detection. An active high Current Sense Enable pin allows all diagnostic and current sense features to be enabled.

Features

- Short Circuit Protection with Inrush Current Management
- CMOS (3 V / 5 V) Compatible Control Input
- Very Low Standby Current
- Very Low Current Sense Leakage
- Proportional Load Current Sense
- Current Sense Enable
- Off State Open Load Detection
- Output Short to V_D Detection
- Overload and Short to Ground Indication
- Thermal Shutdown with Automatic Restart
- Undervoltage Shutdown
- Integrated Clamp for Inductive Switching
- Loss of Ground and Loss of V_D Protection
- ESD Protection
- Reverse Battery Protection with External Components
- NCV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC−Q100 Grade 1 Qualified and PPAP Capable
- This is a Pb−Free Device

Typical Applications

- Switch a Variety of Resistive, Inductive and Capacitive Loads
- Can Replace Electromechanical Relays and Discrete Circuits
- Automotive / Industrial

FEATURE SUMMARY

R_{DSon} (typical) T_J = 25°C	R_{ON}	50	mΩ
Output Current Limit (typical)	I_{lim}	32	A
OFF−state Supply Current (max)	$I_{D(off)}$	0.5	μA

MARKING DIAGRAM



84045	= Specific Device Code
A	= Assembly Location
Y	= Year
WW	= Work Week
▪	= Pb−Free Package

(Note: Microdot may be in either location)

PIN CONNECTIONS



(Top View)

ORDERING INFORMATION

Device	Package	Shipping†
NCV84045DR2G	SOIC−8 (Pb−Free)	2500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.

© Semiconductor Components Industries, LLC, 2017

BLOCK DIAGRAM & PIN CONFIGURATION

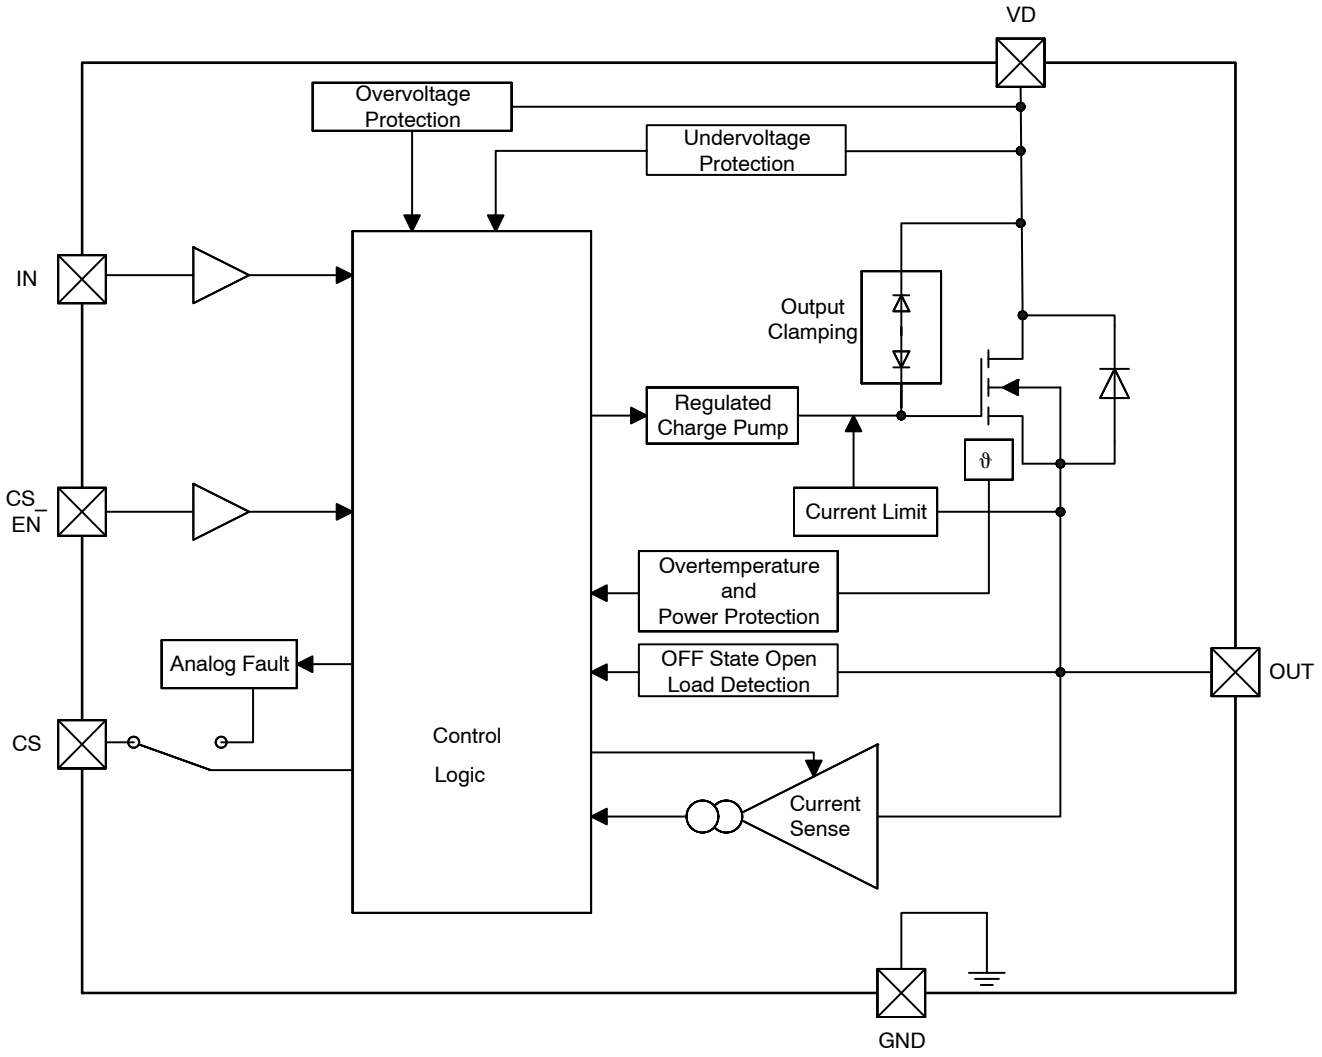

Figure 1. Block Diagram

Table 1. SO8 PACKAGE PIN DESCRIPTION

Pin #	Symbol	Description
1	IN	Logic Level Input
2	CS_EN	Current Sense Enable
3	GND	Ground
4	CS	Analog Current Sense Output
5	V_D	Supply Voltage
6	OUT	Output
7	OUT	Output
8	V_D	Supply Voltage

Share Feedback
Your Opinion Matters

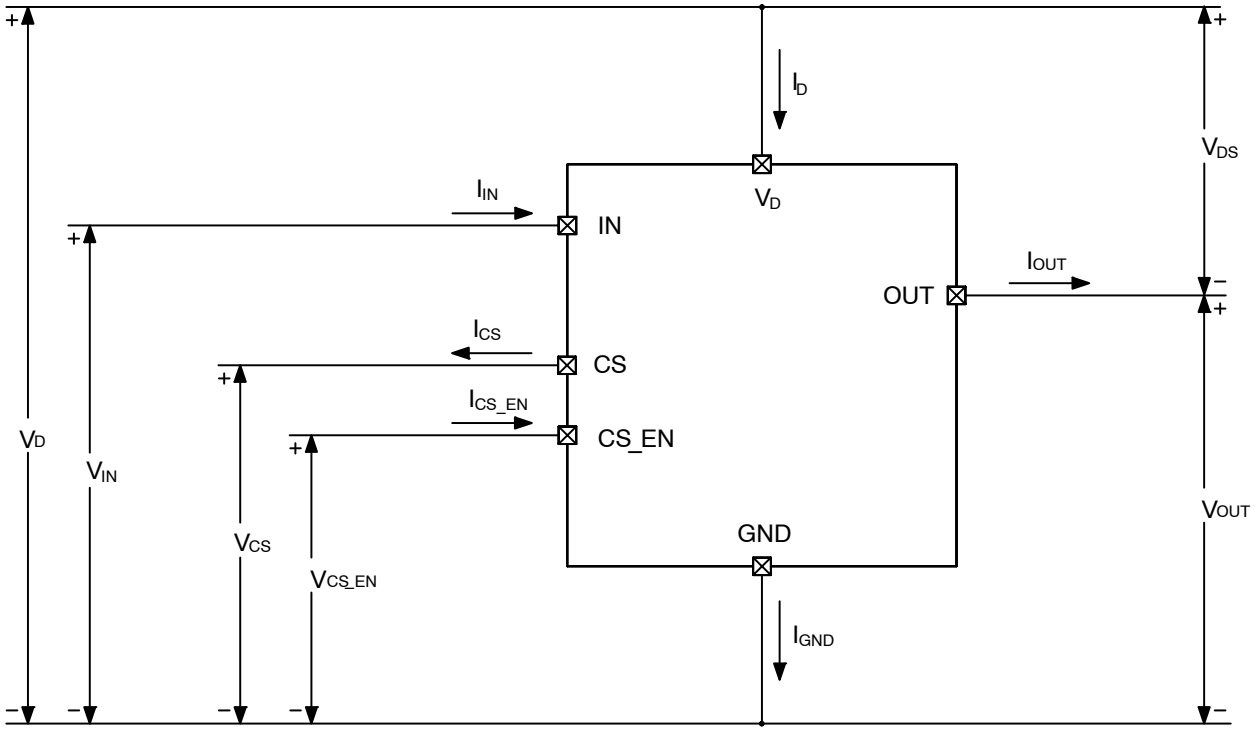

Figure 2. Voltage and Current Conventions

Table 2. Connection suggestions for unused and or unconnected pins

Connection	Input	Output	Current Sense	Current Sense Enable
Floating	X	X	Not Allowed	X
To Ground	Through 10 kΩ resistor	Not Allowed	Through 1 kΩ Resistor	Through 10 kΩ resistor

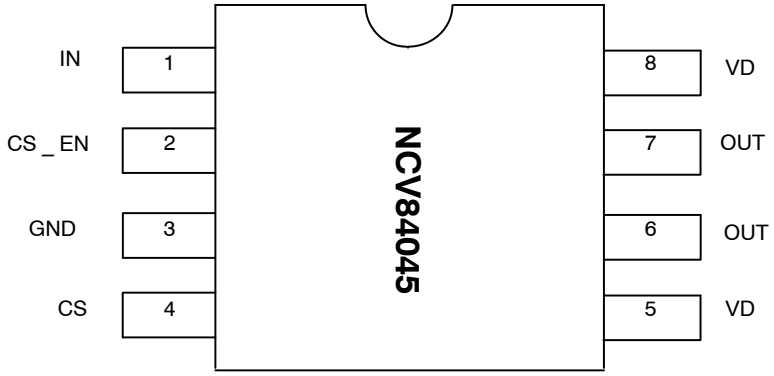

Figure 3. Pin Configuration (Top View)

Share Feedback
Your Opinion Matters

ELECTRICAL SPECIFICATIONS

Table 3. MAXIMUM RATINGS

Rating	Symbol	Value		Unit
DC Supply Voltage	V_D	−0.3	38	V
Max Transient Supply Voltage (Note 1) Load Dump − Suppresses	U_S*	−	45	V
Input Voltage	V_{IN}	−10	10	V
Input Current	I_{IN}	−5	5	mA
Reverse Ground Pin Current	I_{GND}	−	−200	mA
Output Current (Note 2)	I_{OUT}	−6	Internally Limited	A
Reverse CS Current	I_{CS}	−	−200	mA
CS Voltage	V_{CS}	V_D − 41	V_D	V
CS_EN Voltage	V_{CS_EN}	−10	10	V
CS_EN Current	I_{CS_EN}	−5	5	mA
Power Dissipation Tc = 25°C (Note 6)	P_{tot}	1.97		W
Electrostatic Discharge (Note 3) (HBM Model 100 pF / 1500 Ω) Input Current Sense Current Sense Enable Output V_D Charged Device Model CDM−AEC−Q100−011	V_{ESD}	 4 4 4 4 4 750	 − − − − − −	DC kV kV kV kV kV V
Single Pulse Inductive Load Switching Energy (L = 5 mH, Vbat = 13 V; I_L = 6.7 A, T_{Jstart} = 150°C) (Note 4)	E_{AS}	−	112	mJ
Operating Junction Temperature	T_J	−40	+150	°C
Storage Temperature	$T_{storage}$	−55	+150	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Load Dump Test B (with centralized load dump suppression) according to ISO16750−2 standard. Guaranteed by design. Not tested in production. Passed Class C according to ISO16750−1.
2. Reverse Output current has to be limited by the load to stay within absolute maximum ratings and thermal performance.
3. This device series incorporates ESD protection and is tested by the following methods:
   ESD Human Body Model tested per AEC−Q100−002 (JS−001−2017)
   Field Induced Charge Device Model ESD characterization is not performed on plastic molded packages with body sizes smaller than 2 x 2 mm due to the inability of a small package body to acquire and retain enough charge to meet the minimum CDM discharge current waveform characteristic defined in JEDEC JS−002−2018
4. Not subjected to production testing.

Table 4. THERMAL RESISTANCE RATINGS

Parameter	Symbol	Max. Value	Units
Thermal Resistance Junction−to−Lead (Note 5) Junction−to−Ambient (Note 5) Junction−to−Ambient (Note 6)	 $R_{\theta JL}$ $R_{\theta JA}$ $R_{\theta JA}$	 27.3 49.9 63.3	°C/W

5. 645 mm^2 pad size, mounted on four−layer 2s2p PCB − FR4, 2 oz. Cu thickness for top and bottom layers and 1 oz. Cu thickness for inner layers (planes not electrically connected)
6. 2 cm^2 pad size, mounted on two−layer 2s0p PCB − FR4, 2 oz. Cu thickness (planes not electrically connected)

Share Feedback
Your Opinion Matters

ELECTRICAL CHARACTERISTICS ($7\ V \le V_D \le 28\ V$; $-40°C < T_J < 150°C$ unless otherwise specified)

Table 5. POWER

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Operating Supply Voltage	V_D		4	–	28	V
Undervoltage Shutdown	V_{UV}		–	3.5	4	V
Undervoltage Shutdown Hysteresis	V_{UV_hyst}		–	0.4	–	V
On Resistance	R_{ON}	I_{OUT} = 3.5 A, T_J = 25°C	–	50	–	mΩ
		I_{OUT} = 3.5 A, T_J = 150°C	–	–	110	
		I_{OUT} = 3.5 A, V_D = 4.5 V, T_J = 25°C	–	–	105	
Supply Current (Note 7)	I_D	OFF−state: V_D = 13 V, V_{IN} = V_{OUT} = 0 V, T_J = 25°C	–	0.2	0.5	μA
		OFF−state: V_D = 13 V, V_{IN} = V_{OUT} = 0 V, T_J = 85°C (Note 8)	–	0.2	0.5	μA
		OFF−state: V_D = 13 V, V_{IN} = V_{OUT} = 0 V, T_J = 125°C	–	–	3	μA
		ON−state: V_D = 13 V, V_{IN} = 5 V, I_{OUT} = 0 A	–	1.9	3.5	mA
On State Ground Current	$I_{GND(ON)}$	V_D = 13 V, V_{CS_EN} = 5 V V_{IN} = 5 V, I_{OUT} = 1 A	–	–	6	mA
Output Leakage Current	I_L	V_{IN} = V_{OUT} = 0 V, V_D = 13 V, T_J = 25°C	–	–	0.5	μA
		V_{IN} = V_{OUT} = 0 V, V_D = 13 V, T_J = 125°C	–	–	3	

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

7. Includes PowerMOS leakage current.
8. Not subjected to production testing.

Table 6. LOGIC INPUTS (V_D = 13.5 V; $-40°C < T_J < 150°C$)

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Input Voltage − Low	V_{in_low}		–	–	0.9	V
Input Current − Low	I_{in_low}	V_{IN} = 0.9 V	1	–	–	μA
Input Voltage − High	V_{in_high}		2.1	–	–	V
Input Current − High	I_{in_high}	V_{IN} = 2.1 V	–	–	10	μA
Input Hysteresis Voltage	V_{in_hyst}		–	0.2	–	V
Input Clamp Voltage	V_{in_cl}	I_{IN} = 1 mA	12	13	14	V
		I_{IN} = −1 mA	−14	−13	−12	
CS_EN Voltage − Low	V_{CSE_low}		–	–	0.9	V
CS_EN Current − Low	I_{CSE_low}	V_{CS_EN} = 0.9 V	1	–	–	μA
CS_EN Voltage − High	V_{CSE_high}		2.1	–	–	V
CS_EN Current − High	I_{CSE_high}	V_{CS_EN} = 2.1 V	–	–	10	μA
CS_EN Hysteresis Voltage	V_{CSE_hyst}		–	0.2	–	V
CS_EN Clamp Voltage	V_{CSE_cl}	I_{CS_EN} = 1 mA	12	13	14	V
		I_{CS_EN} = −1 mA	−14	−13	−12	

Share Feedback
Your Opinion Matters

Table 7. SWITCHING CHARACTERISTICS (V_D = 13 V, −40°C < T_J < 150°C)

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Turn−On Delay Time	t_{d_on}	V_{IN} high to 20% V_{OUT}, R_L = 6.5 Ω, T_J = 25°C	5	60	120	μs
Turn−Off Delay Time	t_{d_off}	V_{IN} low to 80% V_{OUT}, R_L = 6.5 Ω, T_J = 25°C	5	40	100	μs
Slew Rate On	dV_{out}/dt_{on}	20% to 80% V_{OUT}, R_L = 6.5 Ω, T_J = 25°C	0.1	0.27	0.7	V / μs
Slew Rate Off	dV_{out}/dt_{off}	80% to 20% V_{OUT}, R_L = 6.5 Ω, T_J = 25°C	0.1	0.35	0.7	V / μs
Turn−On Switching Loss (Note 9)	E_{on}	R_L = 6.5 Ω	–	0.15	0.33	mJ
Turn−Off Switching Loss (Note 9)	E_{off}	R_L = 6.5 Ω	–	0.1	0.33	mJ
Differential Pulse Skew, ($t_{(OFF)}$ − $t_{(ON)}$) see Figure 4 (Switching Characteristics)	t_{skew}	R_L = 6.5 Ω	−50	–	50	μs

9. Not subjected to production testing.

Table 8. OUTPUT DIODE CHARACTERISTICS

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Forward Voltage	V_F	I_{OUT} = −2 A, T_J = 150°C, V_F = V_{OUT} − V_D	–	–	0.7	V

Table 9. PROTECTION FUNCTIONS (Note 10) (7 V ≤ V_D ≤ 18 V, −40°C < T_J < 150°C)

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Temperature Shutdown (Note 11)	T_{SD}		150	175	200	°C
Temperature Shutdown Hysteresis (T_{SD} − T_R) (Note 11)	T_{SD_hyst}		–	7	–	°C
Reset Temperature (Note 11)	T_R		T_{RS}+1	T_{RS}+7	–	°C
Thermal Reset of Status (Note 11)	T_{RS}		135	–	–	°C
Delta T Temperature Limit (Note 11)	T_{DELTA}	T_J = −40°C, V_D = 13 V	–	60	–	°C
DC Output Current Limit	I_{limH}	V_D = 13 V	22	32	46	A
		4 V < V_D < 18 V	–	–	46	A
Short Circuit Current Limit during Thermal Cycling (Note 11)	$I_{limTCycling}$	V_D = 13 V T_R < T_J < T_{TSD}	–	11	–	A
Switch Off Output Clamp Voltage	V_{out_clamp}	I_{OUT} = 0.5 A, V_{IN} = 0 V, L = 20 mH	V_D − 41	V_D − 46	V_D − 52	V
Overvoltage Protection	V_{OV}	V_{IN} = 0 V, I_D = 20 mA	41	46	52	V
Output Voltage Drop Limitation	V_{DS_ON}	I_{OUT} = 0.2 A	–	20	–	mV

10. To ensure long term reliability during overload or short circuit conditions, protection and related diagnostic signals must be used together with a fitting hardware & software strategy. If the device operates under abnormal conditions, this hardware & software solution must limit the duration and number of activation cycles.
11. Not subjected to production testing.

Table 10. OPEN−LOAD DETECTION (7 V ≤ V_D ≤ 18 V, −40°C < T_J < 150°C)

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Open−load Off State Detection Threshold	V_{OL}	V_{IN} = 0 V, V_{CS_EN} = 5 V	2	–	4	V
Open−load Detection Delay at Turn Off	$t_{d_OL_off}$		100	350	850	μs
Off State Output Current	I_{OLOFF1}	V_{IN} = 0 V, V_{OUT} = V_{OL}	−3	–	6	μA
Output rising edge to CS rising edge during open load	t_{d_OL}	V_{OUT} = 4 V, V_{IN} = 0 V V_{CS} = 90% of V_{CS_High}	–	5	30	μs

Share Feedback
Your Opinion Matters

Table 11. CURRENT SENSE CHARACTERISTICS ($7\ V \le V_D \le 18\ V$, $-40°C < T_J < 150°C$)

Rating	Symbol	Conditions	Value			Unit
			Min	Typ	Max	
Current Sense Ratio	K_0	I_{OUT} = 0.010 A, V_{CS} = 0.5 V, V_{CS_EN} = 5 V	390	1000	–	
Current Sense Ratio	K_1	I_{OUT} = 0.05 A, V_{CS} = 0.5 V, V_{CS_EN} = 5 V	350	860	1800	
Current Sense Ratio Drift (Note 13)	$\Delta K_1 / K_1$	I_{OUT} = 0.05 A, V_{CS} = 0.5 V, V_{CS_EN} = 5 V	−25	–	25	%
Current Sense Ratio	K_2	I_{OUT} = 0.5 A, V_{CS} = 4 V, V_{CS_EN} = 5 V	500	1210	1740	
Current Sense Ratio Drift (Note 13)	$\Delta K_2 / K_2$	I_{OUT} = 0.5 A, V_{CS_EN} = 5 V	−20	–	20	%
Current Sense Ratio	K_3	I_{OUT} = 0.7 A, V_{CS} = 4 V, V_{CS_EN} = 5 V	760	1220	1630	
Current Sense Ratio Drift (Note 13)	$\Delta K_3 / K_3$	I_{OUT} = 0.7 A, V_{CS_EN} = 5 V	−15	–	15	%
Current Sense Ratio	K_4	I_{OUT} = 1.5 A, V_{CS} = 4 V, V_{CS_EN} = 5 V	970	1230	1420	
Current Sense Ratio Drift (Note 13)	$\Delta K_4 / K_4$	I_{OUT} = 1.5 A, V_{CS_EN} = 5 V	−10	–	10	%
Current Sense Ratio	K_5	I_{OUT} = 4.5 A, V_{CS} = 4 V, V_{CS_EN} = 5 V	1090	1230	1340	
Current Sense Ratio Drift (Note 13)	$\Delta K_5 / K_5$	I_{OUT} = 4.5 A, V_{CS_EN} = 5 V	−5	–	5	%
Current Sense Leakage Current	CS_{llkg}	I_{OUT} = 0 A, V_{CS} = 0 V V_{CS_EN} = 5 V, V_{IN} = 0 V	–	–	1	μA
		I_{OUT} = 0 A, V_{CS} = 0 V V_{CS_EN} = 5 V, V_{IN} = 5 V	–	–	2	
		I_{OUT} = 2 A, V_{CS} = 0 V V_{CS_EN} = 0 V, V_{IN} = 5 V,	–	–	0.5	
CS Max Voltage	CS_{Max}	V_D = 7 V, V_{IN} = 5 V, R_{CS} = 15 kΩ, I_{OUT} = 2 A, T_J = 150°C, V_{CS_EN} = 5 V	5	–	7	V
Current Sense Voltage in Fault Condition (Note 12)	V_{CS_fault}	V_D = 13 V, V_{IN} = 0 V, R_{CS} = 1 k, V_{OUT} = 4 V, V_{CS_EN} = 5 V	–	10	–	V
Current Sense Current in Fault Condition (Note 12)	I_{CS_fault}	V_D = 13 V, V_{CS}= 5 V, V_{IN} = 0 V, V_{OUT} = 4 V, V_{CS_EN} = 5 V	7	20	30	mA
Output Saturation Current (Note 13)	I_{OUT_sat}	V_D = 7 V, V_{CS}= 4 V, V_{IN} = 5 V, T_J = 150°C, V_{CS_EN} = 5 V	5.3	–	–	A
CS_EN High to CS High Delay Time	t_{CS_High1}	V_{IN} = 5 V, V_{CS_EN} = 0 to 5 V, R_{CS} = 1 kΩ, R_L = 6.5 Ω	–	10	60	μs
CS_EN Low to CS Low Delay Time	t_{CS_Low1}	V_{IN} = 5 V, V_{CS_EN} = 5 to 0 V, R_{CS} = 1 kΩ, R_L = 6.5 Ω	–	5	25	μs
V_{IN} High to CS High Delay Time	t_{CS_High2}	V_{IN} = 0 to 5 V, V_{CS_EN} = 5 V, R_{CS} = 1 kΩ, R_L = 6.5 Ω	–	100	250	μs
V_{IN} Low to CS Low Delay Time	t_{CS_Low2}	V_{IN} = 5 to 0 V, V_{CS_EN} = 5 V, R_{CS} = 1 kΩ, R_L = 6.5 Ω	–	50	250	μs
Delay Time I_D Rising Edge to Rising Edge of CS	Δt_{CS_High2}	R_L = 6.5 Ω, R_{CS} = 1 kΩ, V_{IN} = 5 V, I_{OUT} = 200 mA, I_{CS} = 50% of I_{CSMAX}	–	–	100	μs

12. The following fault conditions included are: Over−temperature, Power Limitation, and OFF State Open−Load Detection.
13. Not subjected to production testing.

Share Feedback
Your Opinion Matters

Table 12. TRUTH TABLE

Conditions	Input	Output	CS (V_{CS_EN} = 5 V) (Note 14)
Normal Operation	L H	L H	0 $I_{CS} = I_{OUT}/K_{NOMINAL}$
Overtemperature	L H	L L	0 V_{CS_fault}
Undervoltage	L H	L L	0 0
Overload	H H	H (no active current mgmt) Cycling (active current mgmt)	$I_{CS} = I_{OUT}/K_{NOMINAL}$ V_{CS_fault}
Short circuit to Ground	L H	L L	0 V_{CS_fault}
OFF State Open Load	L	H	V_{CS_fault}

14. If V_{CS_EN} is low, the Current Sense output is at a high impedance, its potential depends on leakage currents and external circuitry.

Share Feedback
Your Opinion Matters

WAVEFORMS AND GRAPHS

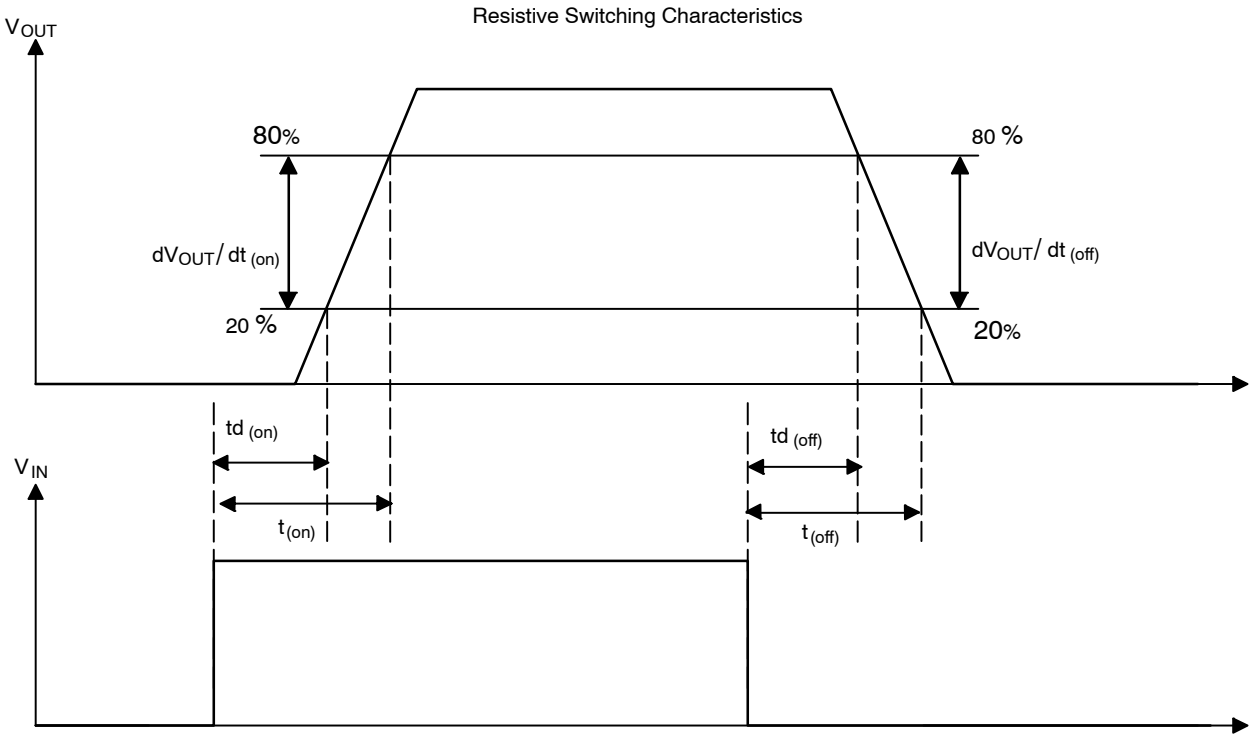

Figure 4. Switching Characteristics

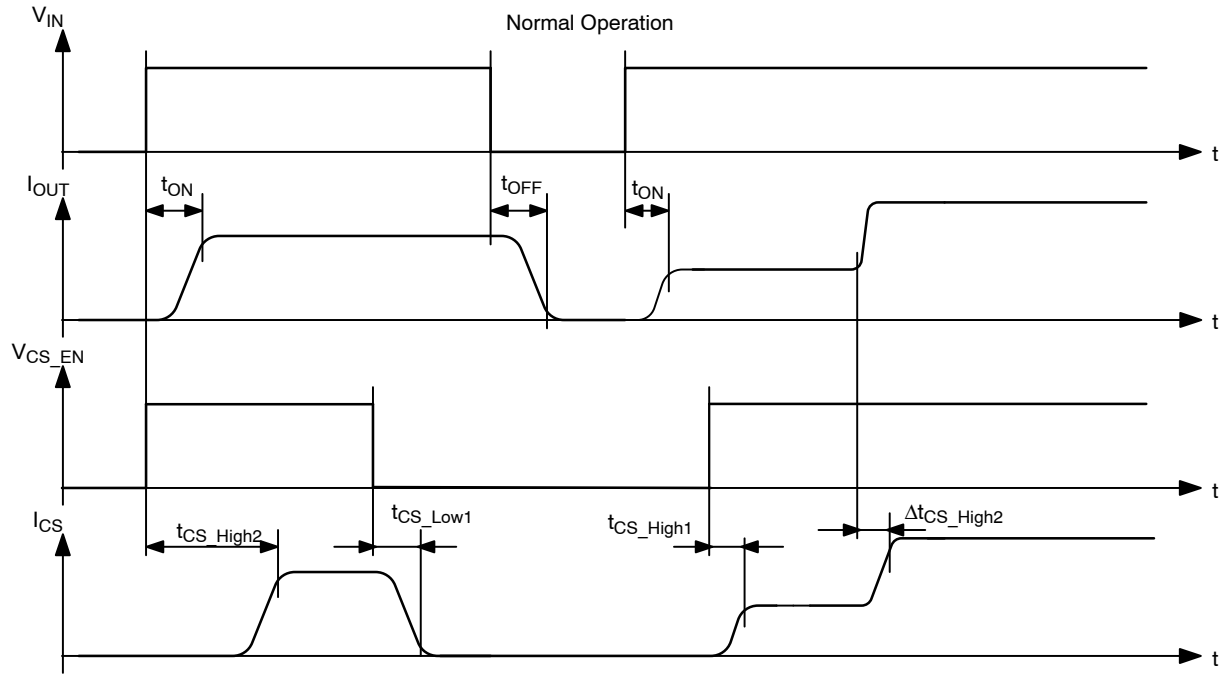

Figure 5. Normal Operation with Current Sense Timing Characteristics

Share Feedback
Your Opinion Matters

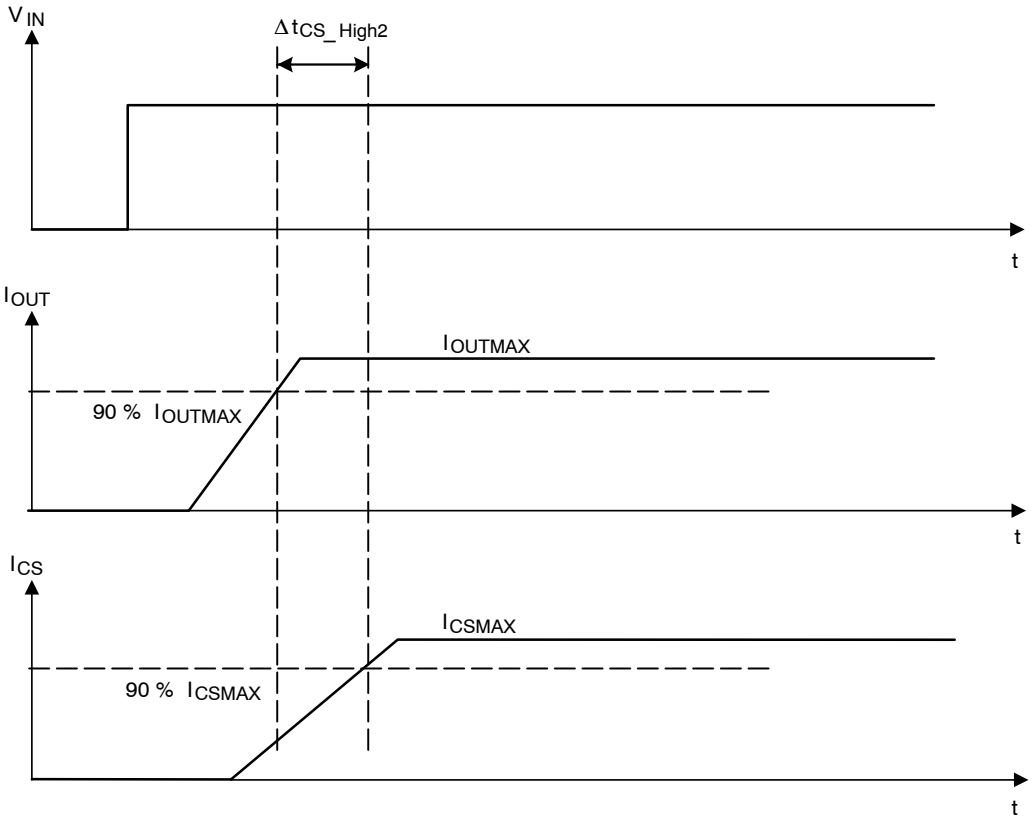

Figure 6. Delay Response from Rising Edge of IOUT and Rising Edge of CS (for CS_EN = 5V)

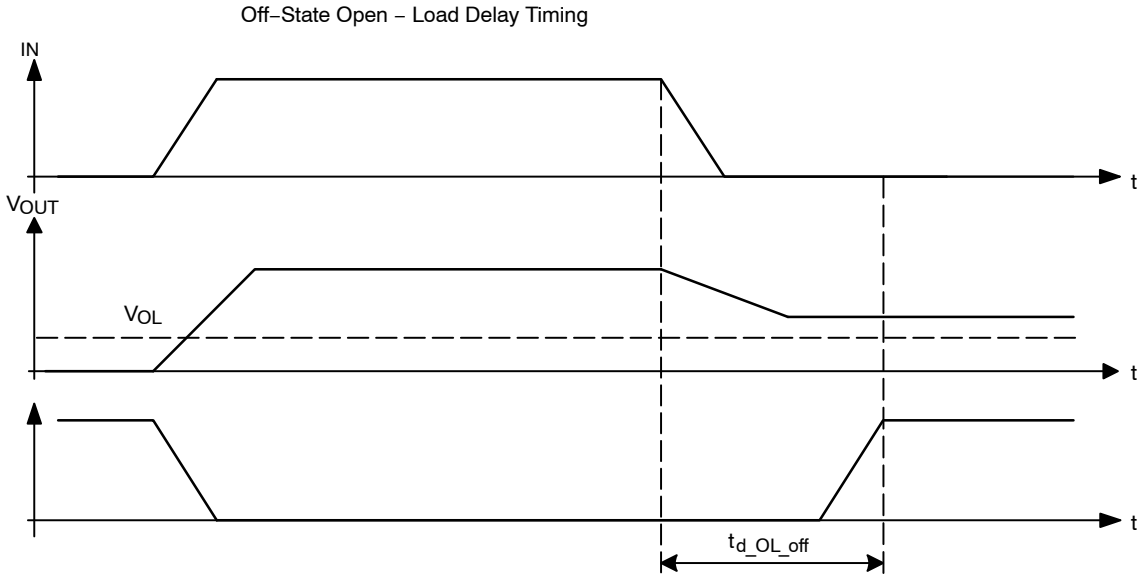

Figure 7. OFF−State Open−Load Flag Delay Timing

Share Feedback
Your Opinion Matters

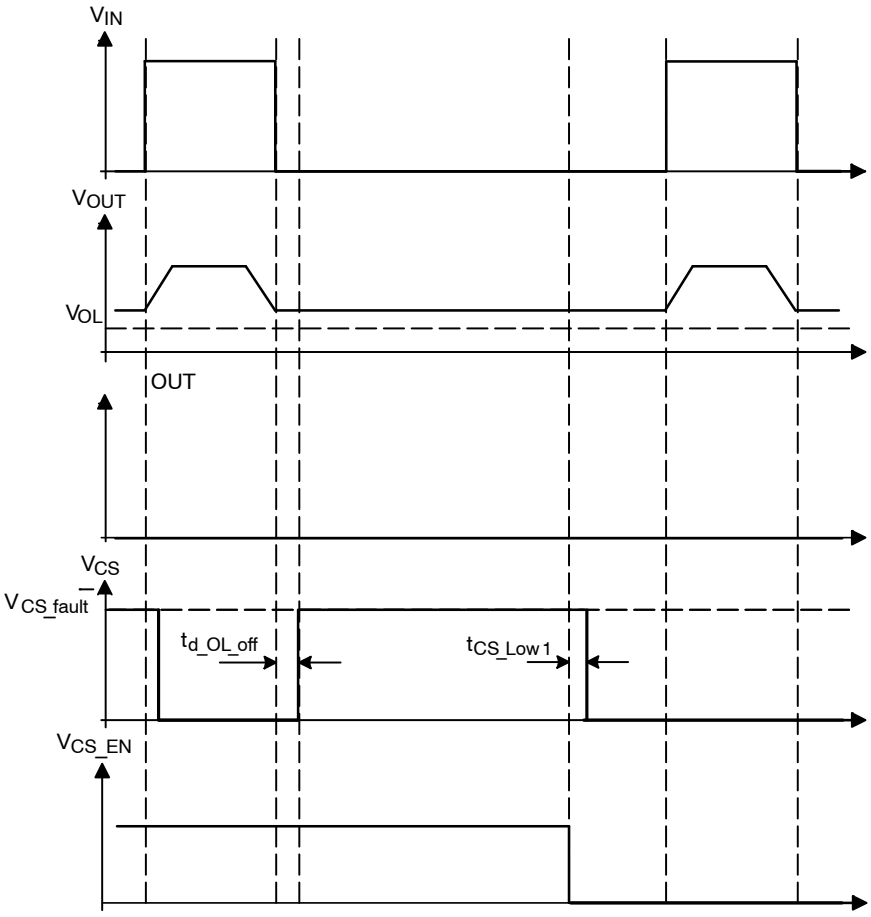

Figure 8. Off−State Open−Load with Added External Components

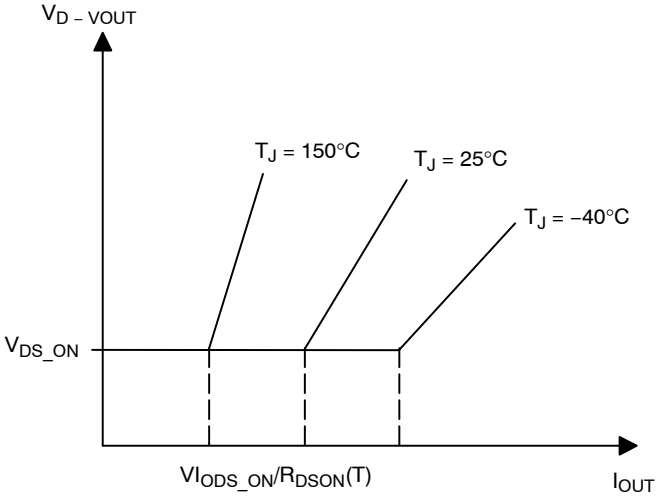

Figure 9. Voltage Drop Limitation for VDS_ON

Share Feedback
Your Opinion Matters

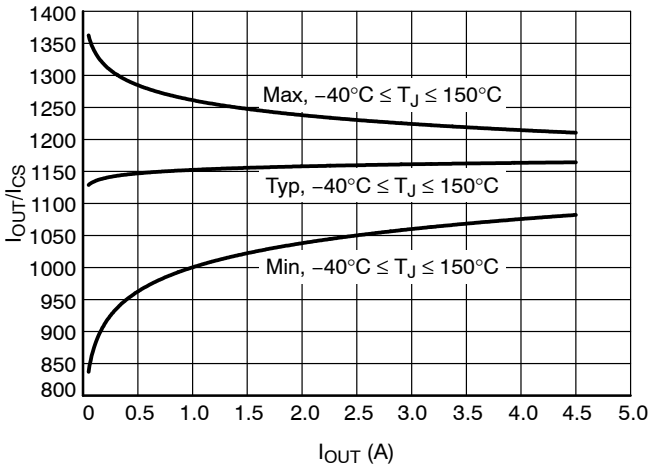

Figure 10. I_{OUT}/I_{CS} vs. I_{OUT}

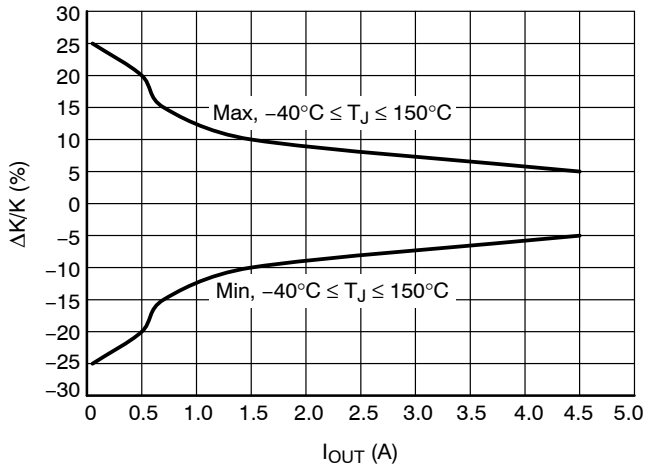

Figure 11. Maximum Current Sense Ratio Drift vs. Load Current

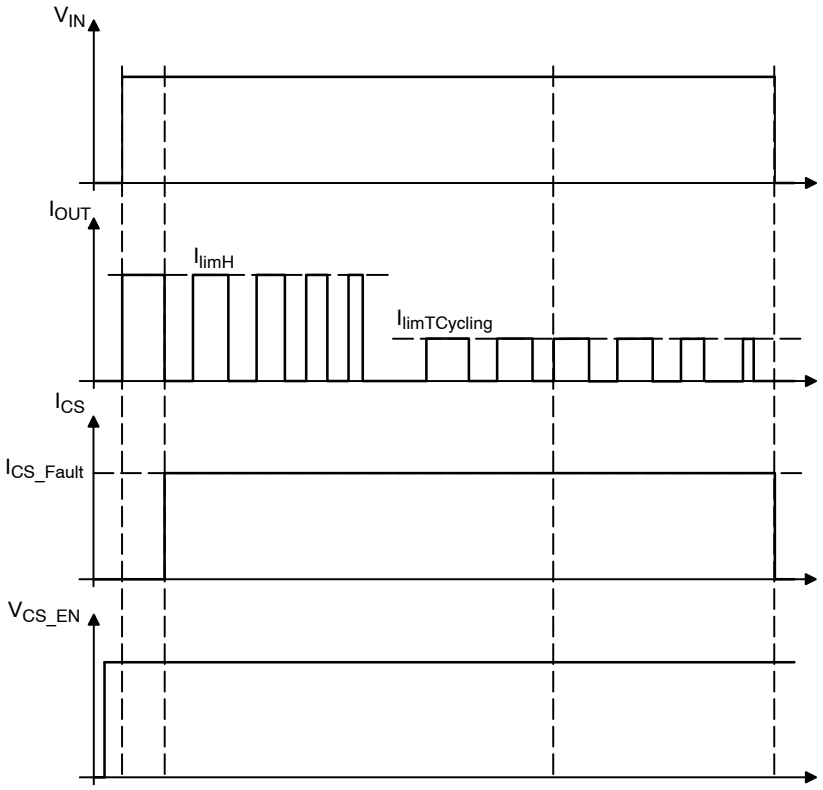

Figure 12. Short to GND or Overload

Share Feedback
Your Opinion Matters

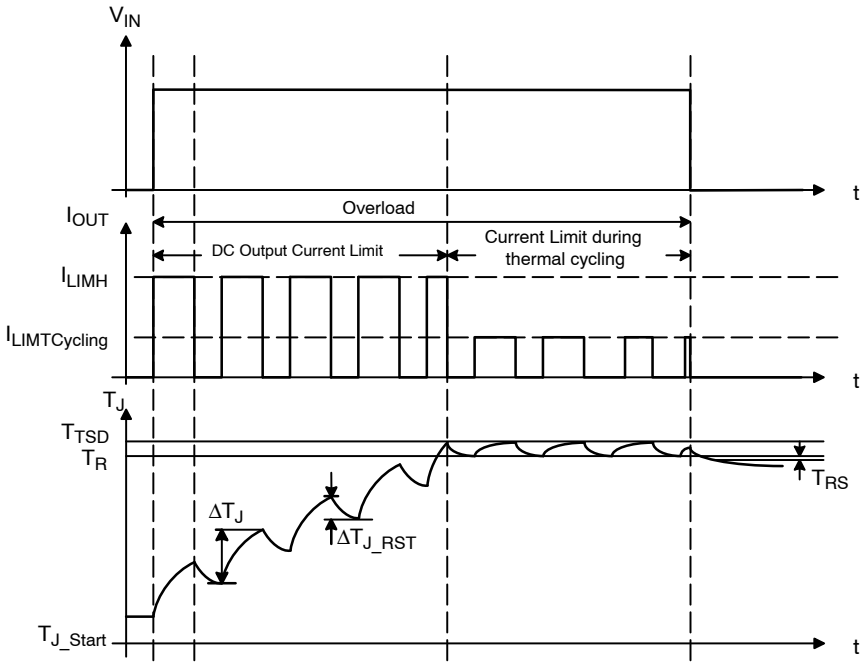

Figure 13. How T_J progresses During Short to GND or Overload

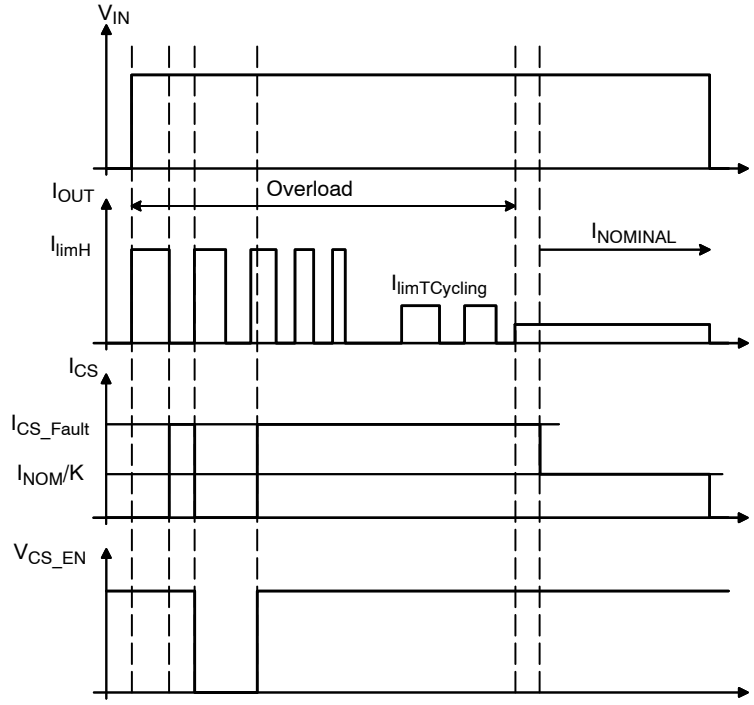

Figure 14. Discontinuous Overload or Short to GND

Share Feedback
Your Opinion Matters

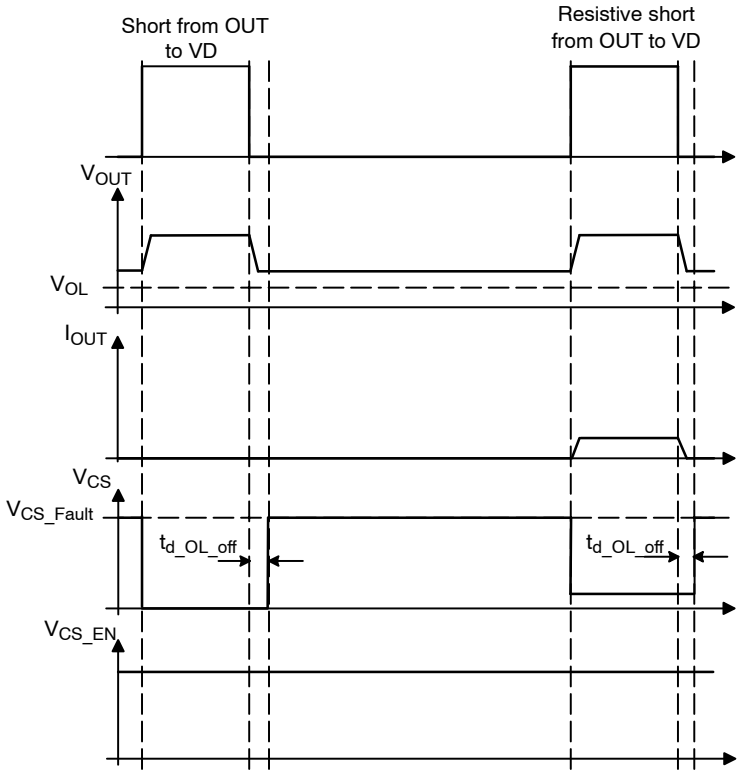

Figure 15. Short Circuit from OUT to VD

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

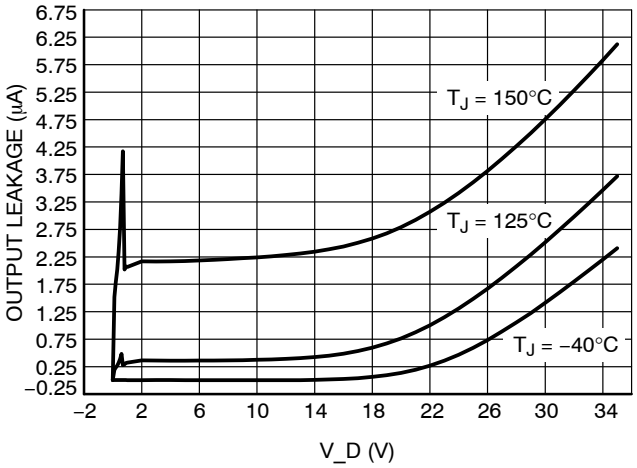

Figure 16. Output Leakage Current vs. VD Voltage & Temperature, V_OUT = 0 V

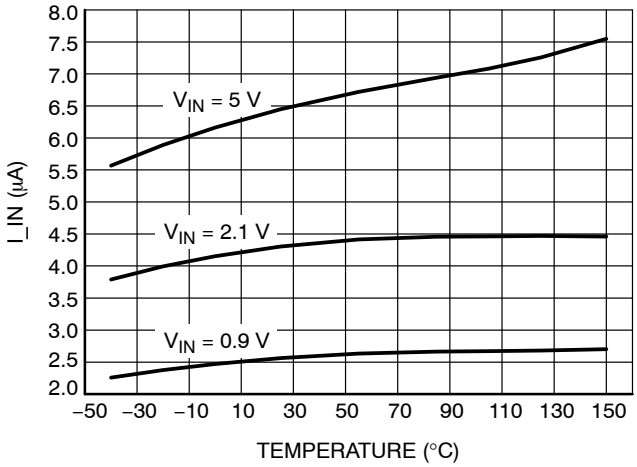

Figure 17. Input Current vs. Temperature

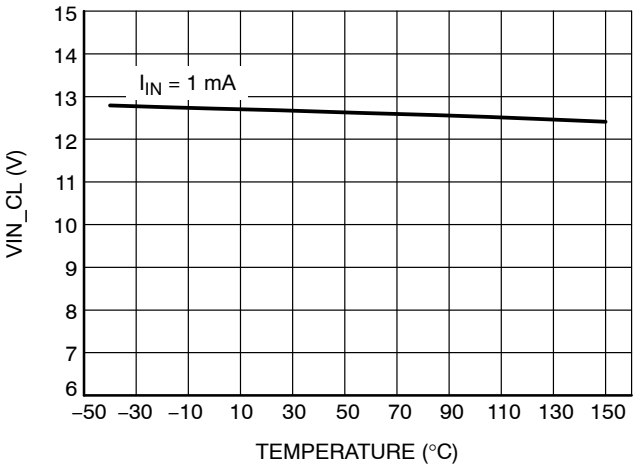

Figure 18. Input Clamp Voltage (Positive) vs. Temperature

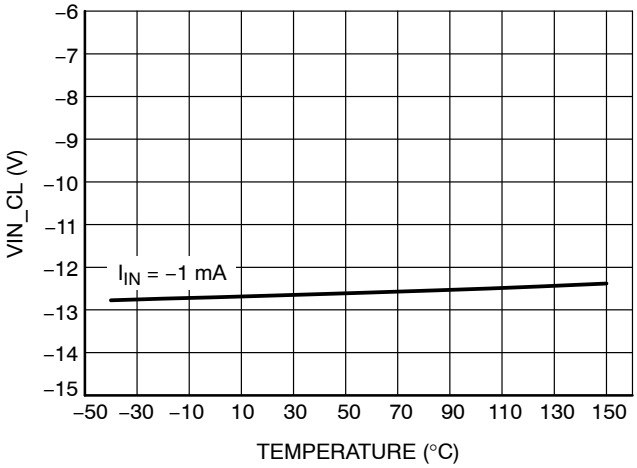

Figure 19. Input Clamp Voltage (Negative) vs. Temperature

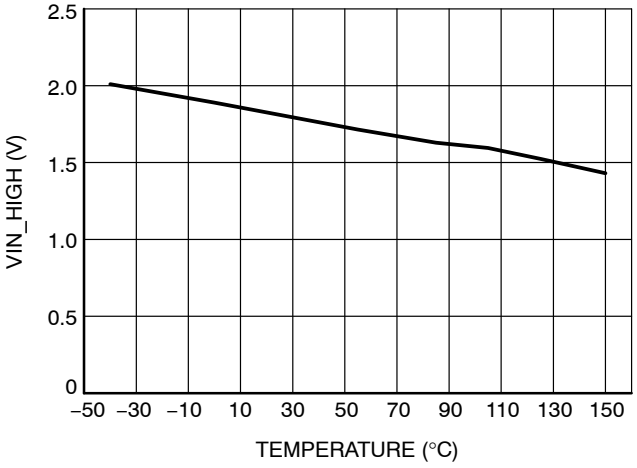

Figure 20. V_IN Threshold High vs. Temperature

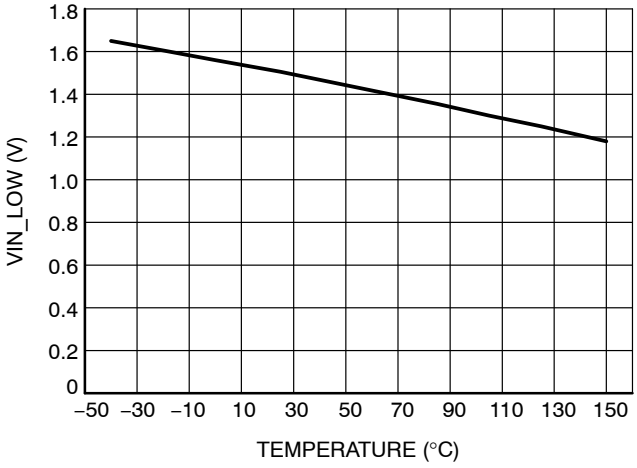

Figure 21. V_IN Threshold Low vs. Temperature

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

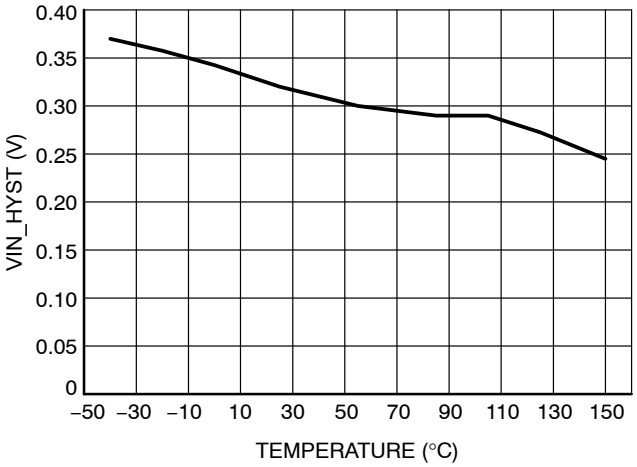

Figure 22. Hysteresis Input Voltage vs. Temperature

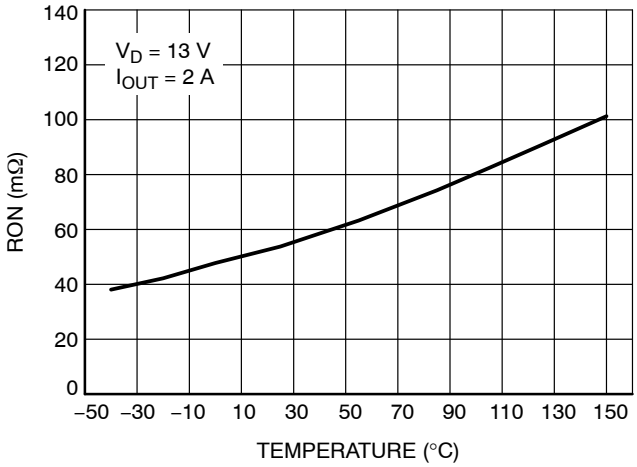

Figure 23. R_ON vs. Temperature

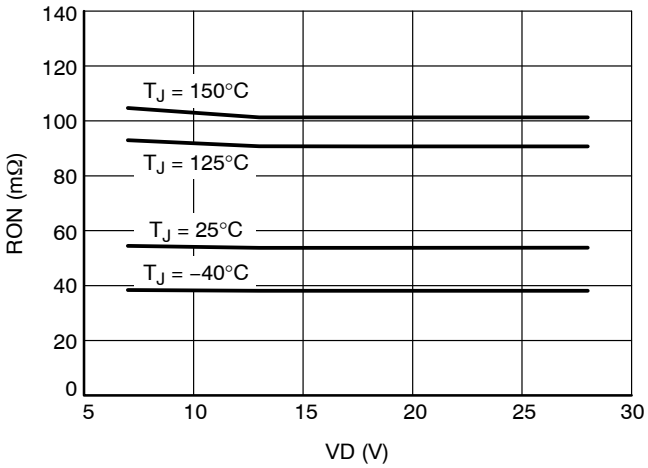

Figure 24. R_ON vs. V_D Voltage

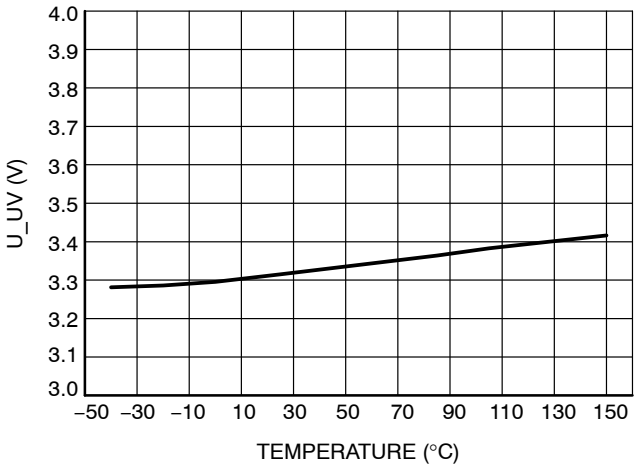

Figure 25. Undervoltage Shutdown vs. Temperature

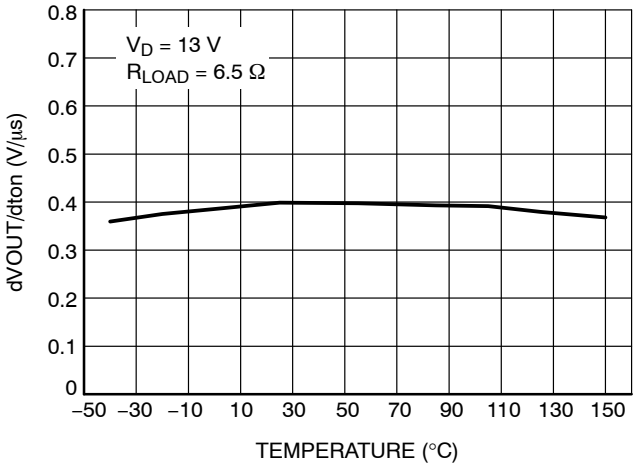

Figure 26. Slew Rate ON vs. Temperature

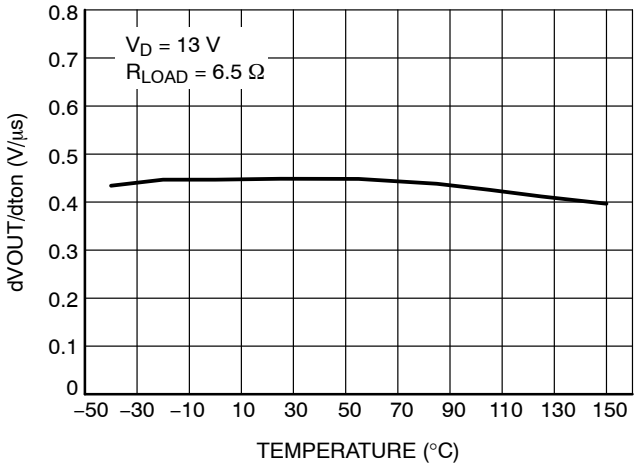

Figure 27. Slew Rate OFF vs. Temperature

Share Feedback
Your Opinion Matters

TYPICAL CHARACTERISTICS

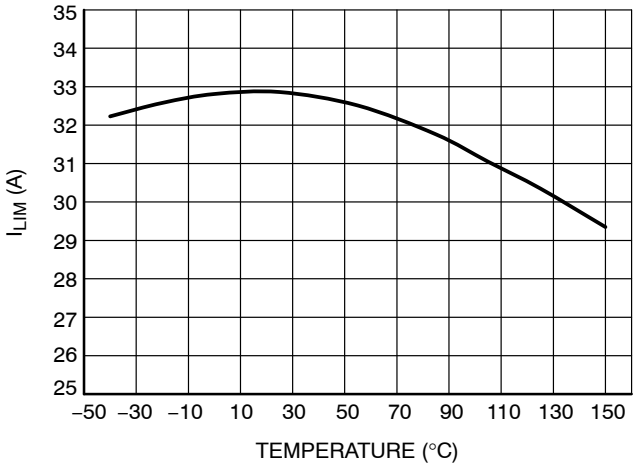

Figure 28. Current Limit vs. Temperature

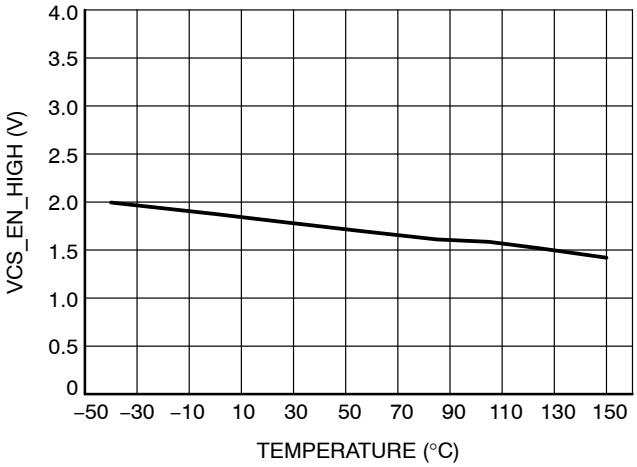

Figure 29. CS_EN Threshold High vs. Temperature

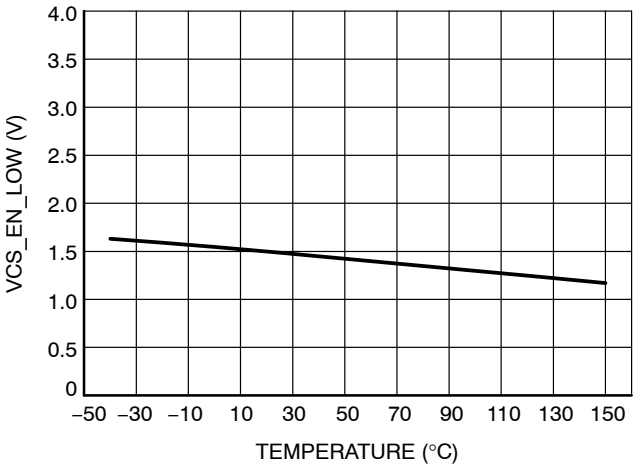

Figure 30. CS_EN Threshold Low vs. Temperature

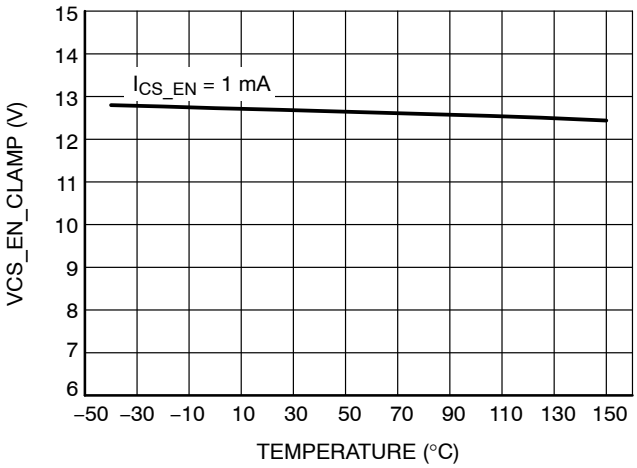

Figure 31. CS_EN Clamp Voltage (Positive) vs. Temperature

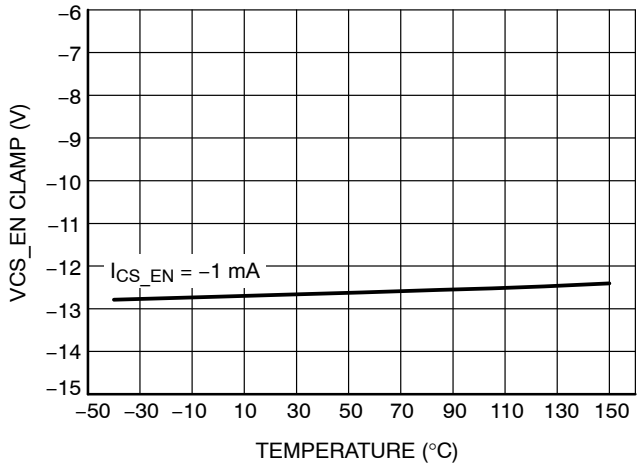

Figure 32. CS_EN Clamp Voltage (Negative) vs. Temperature

Share Feedback
Your Opinion Matters

Table 13. ISO 7637−2: 2011(E) PULSE TEST RESULTS

ISO 7637−2:2011(E) Test Pulse	Test Severity Levels, 12 V System			Delays and Impedance	# of Pulses or Test Time	Pulse / Burst Rep. Time
	I / II	III	IV			
1	−75	−112	−150	2 ms, 10 Ω	500 pulses	0.5 s
2a	+37	+55	+112	0.05 ms, 2 Ω	500 pulses	0.5 s
3a	−112	−165	−220	0.1 μs, 50 Ω	1 h	100 ms
3b	+75	+112	+150	0.1 μs, 50 Ω	1 h	100 ms

ISO 7637−2:2011(E)		Test Results	
Test Pulse	I / II	III	IV
1			A
2a			C
3a			A
3b			A

Class	Functional Status
A	All functions of a device perform as designed during and after exposure to disturbance.
B	All functions of a device perform as designed during exposure. However,one or more of them can go beyond specified tolerance. All functions return automatically to within normal limits after exposure is removed. Memory functions shall remain class A.
C	One or more functions of a device do not perform as designed during exposure but return automatically to normal operation after exposure is removed.
D	One or more functions of a device do not perform as designed during exposure and do not return to normal operation until exposure is removed and the device is reset by simple “operator/use” action.
E	One or more functions of a device do not perform as designed during and after exposure and cannot be returned to proper operation without replacing the device.

Share Feedback
Your Opinion Matters

APPLICATION INFORMATION

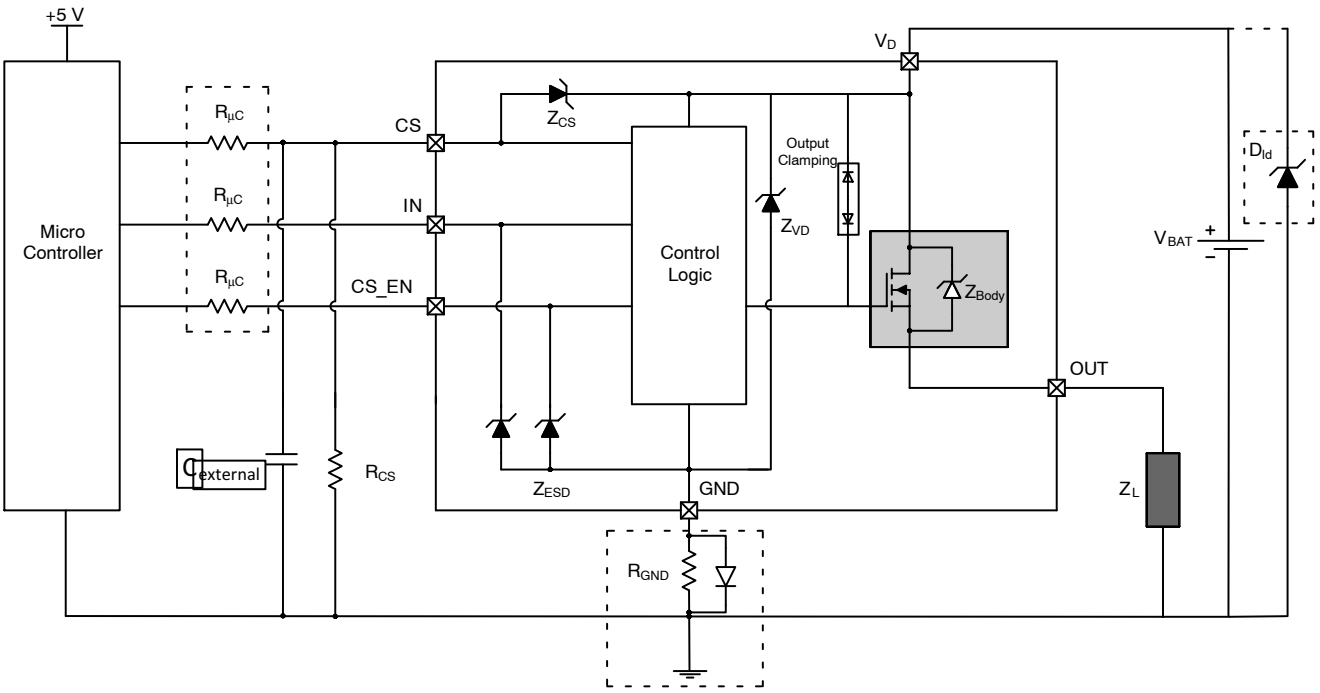

Figure 33. Application Schematic

Share Feedback
Your Opinion Matters

LOSS OF GROUND PROTECTION

When device or ECU ground connection is lost and load is still connected to ground, the device will turn the output OFF. In loss of ground state, the output stage is held OFF independent of the state of the input. Input resistors are recommended between the device and microcontroller.

Reverse Battery Protection

Solution 1: Resistor in the GND line only (no parallel Diode)

The following calculations are true for any type of load.

In the case for no diode in parallel with R_{GND}, the calculations below explain how to size the resistor.

Consider the following parameters:

$-I_{GND}$ Maximum = 200 mA for up to $-V_D$ = 32 V.

Where $-I_{GND}$ is the DC reverse current through the GND pin and $-V_D$ is the DC reverse battery voltage.

$$-I_{GND} = \frac{-V_D}{R_{GND}} \quad \text{(eq. 1)}$$

Since this resistor can be used amongst multiple High−Side devices, please take note the sum of the maximum active GND currents ($I_{GND(On)max}$) for each device when sizing the resistor. Please note that if the microprocessor GND is not shared by the device GND, then R_{GND} produces a shift of ($I_{GND(On)max} \times R_{GND}$) in the input thresholds and CS output values. If the calculated power dissipation leads to too large of a resistor size or several devices have to share the same resistor, please look at the second solution for Reverse Battery Protection. Refer to Figure 35 for selecting the proper R_{GND}.

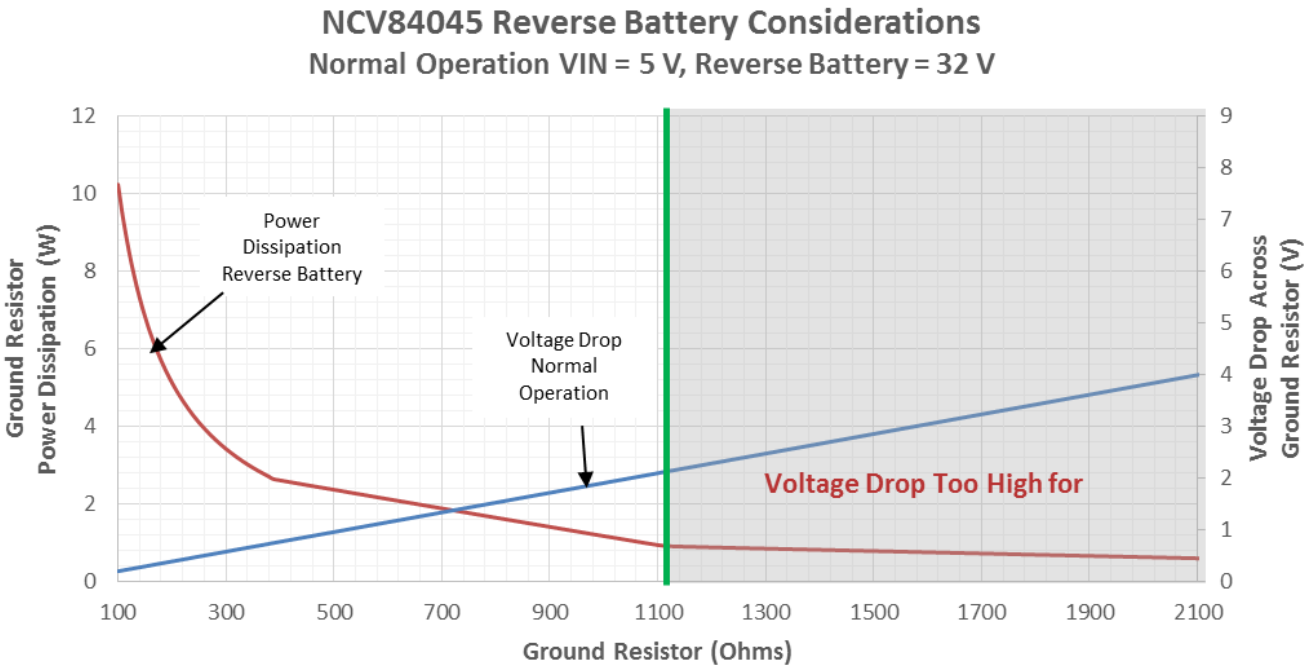

Figure 34. Reverse Battery R_{GND} Considerations

Solution 2: Diode (D_{GND}) in parallel with RGND in the ground line.

A resistor value of R_{GND} = 1 kOhm should be selected and placed in parallel to D_{GND} if the device drives an inductive load. The diode (D_{GND}) provides a ~600−700 mV shift in the input threshold and current sense values if the micro controller ground is not common to the device ground. This shift will not vary even in the case of multiple high−side devices using the same resistor/diode network.

Share Feedback
Your Opinion Matters

UNDERVOLTAGE PROTECTION

The device has two under−voltage threshold levels, V_{D_MIN} and V_{UV}. Switching function (ON/OFF) requires supply voltage to be at least V_{D_MIN}. The device features a lower supply threshold V_{UV}, above which the output can remain in ON state. While all protection functions are guaranteed when the switch is ON, diagnostic functions are operational only within nominal supply voltage range V_D.

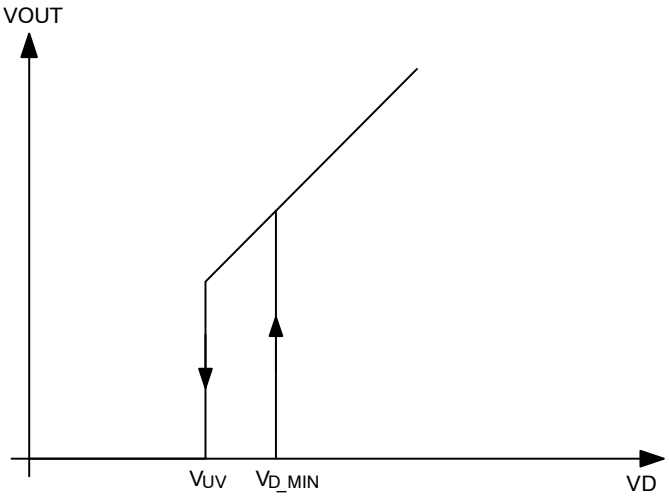

Figure 35. Undervoltage Behavior

Overvoltage Protection

The NCV84045 has two Zener diodes Z_{VD} and Z_{CS}, which provide integrated overvoltage protection. Z_{VD} protects the logic block by clamping the voltage between supply pin V_D and ground pin GND to V_{ZVD}. Z_{CS} limits voltage at current sense pin CS to $V_D - V_{ZCS}$. The output power MOSFET's output clamping diodes provide protection by clamping the voltage across the MOSFET (between V_D pin and OUT pin) to V_{CLAMP}. During overvoltage protection, current flowing through Z_{VD}, Z_{CS} and the output clamp must be limited. Load impedance Z_L limits the current in the body diode Z_{Body}. In order to limit the current in Z_{VD} a resistor, R_{GND} (150 Ω), is required in the GND path. External resistors R_{CS} and R_{SENSE} limit the current flowing through Z_{CS} and out of the CS pin into the micro−controller I/O pin. With RGND, the GND pin voltage is elevated to $V_D - V_{ZVD}$ when the supply voltage V_D rises above V_{ZVD}. ESD diodes Z_{ESD} pull up the voltage at logic pins IN, CS_EN close to the GND pin voltage $V_D - V_{ZVD}$. External resistors R_{IN}, and R_{CS_EN} are required to limit the current flowing out of the logic pins into the micro−controller I/O pins. During overvoltage exposure, the device transitions into a self−protection state, with automatic recovery after the supply voltage comes back to the normal operating range. The specified parameters as well as short circuit robustness and energy capability cannot be guaranteed during overvoltage exposure.

Overload Protection

Current limitation as well as overtemperature shutdown mechanisms are integrated into NCV84045 to provide protection from overload conditions such as bulb inrush or short to ground.

Current Limitation

In case of overload, NCV84045 limits the current in the output power MOSFET to a safe value. Due to high power dissipation during current limitation, the device's junction temperature increases rapidly. In order to protect the device, the output driver is shut down by one of the two overtemperature protection mechanisms. The output current limit is dependent on the device temperature, and will fold back once the die reaches thermal shutdown. If the input remains active during the shutdown, the output power MOSFET will automatically be re−activated after a minimum OFF time or when the junction temperature returns to a safe level.

Share Feedback
Your Opinion Matters

Output Clamping with Inductive Load Switch Off

The output voltage V_{OUT} drops below GND potential when switching off inductive loads. This is because the inductance develops a negative voltage across the load in response to a decaying current. The integrated clamp of the device clamps the negative output voltage to a certain level relative to the supply voltage V_{BAT}. During output clamping with inductive load switch off, the energy stored in the inductance is rapidly dissipated in the device resulting in high power dissipation. This is a stressful condition for the device and the maximum energy allowed for a given load inductance should not be exceeded in any application.

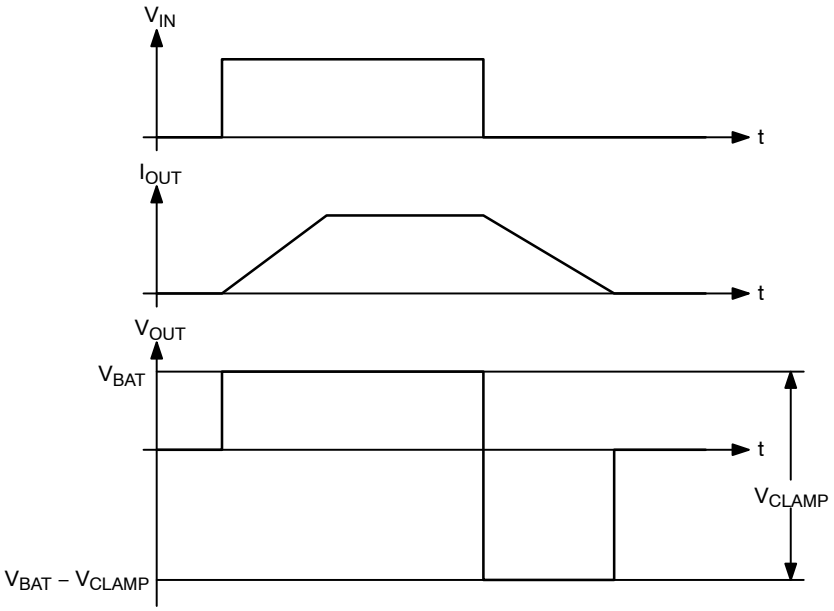

Figure 36. Inductive Load Switching

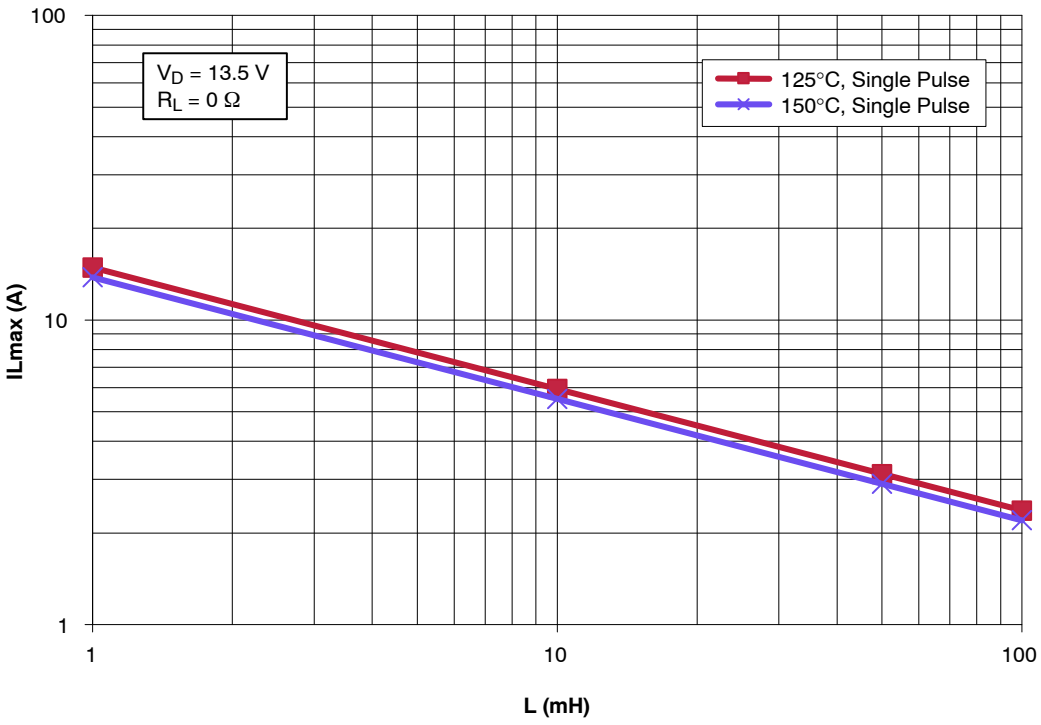

Figure 37. Maximum Switch−Off Current vs. Load Inductance, V_D = 13.5 V, R_L = 0 Ω

Share Feedback
Your Opinion Matters

OPEN LOAD DETECTION IN OFF STATE

Open load diagnosis in OFF state can be performed by activating an external resistive pull−up path (R_{PU}) to V_{BAT}. To calculate the pull−up resistance, external leakage currents (designed pull−down resistance, humidity−induced leakage etc) as well as the open load threshold voltage V_{OL} have to be taken into account.

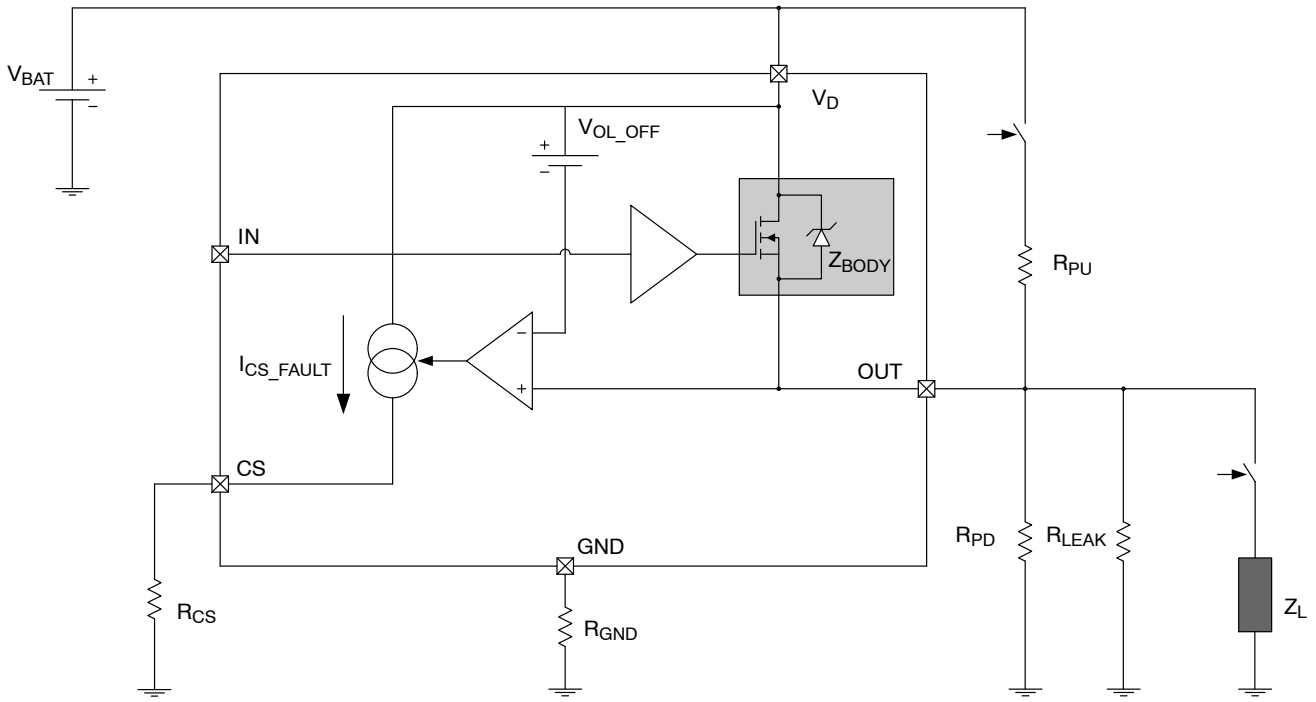

Figure 38. Open Load Detection in Off State

CURRENT SENSE IN PWM MODE

When operating in PWM mode, the current sense functionality can be used, but the timing of the input signal and the response time of the current sense need to be considered. When operating in PWM mode, the following performance is to be expected. The CS_EN pin should be held high to eliminate any unnecessary delay time to the circuit. When V_{IN} switches from low to high, there will be a typical delay (t_{CS_High2}) before the current sense responds. Once this timing delay has passed, the rise time of the current sense output (Δt_{CS_High2}) also needs to be considered. When V_{IN} switches from high to low a delay time (t_{CS_Low1}) needs to be considered. As long as these timing delays are allowed, the current sense pin can be operated in PWM mode.

HINTS

This device is not targeting safety critical applications as it does not contain specific safety mechanisms. In case a customer would like to use the device for safety critical applications then he would need to use decomposition at system level to use the device. This is possible and quite common practice and will be clearly indicated in the datasheet. In this condition the development would be done as QM without any ASIL level assigned.

EMC Performance

If better EMC performance is needed, connect a C1 = 100 nF, C2 = C3 = 10 nF ceramic capacitors to the pins as close to the device as possible according to Figure 39.

Share Feedback
Your Opinion Matters

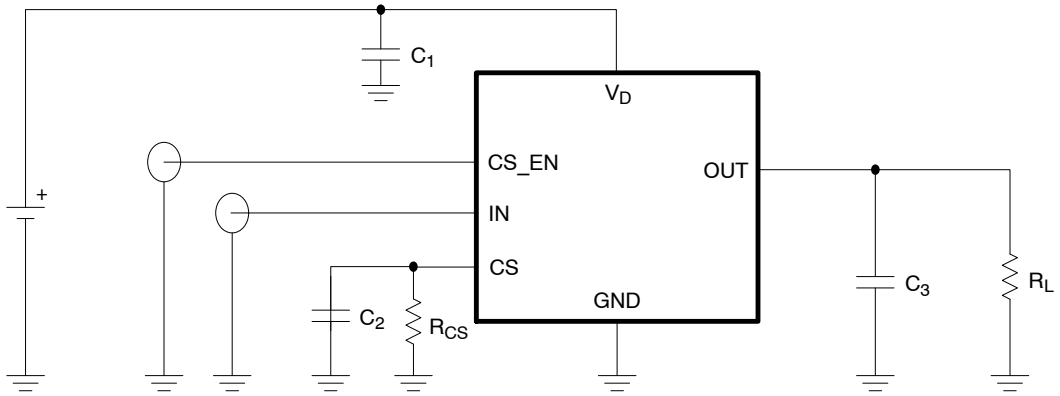

Figure 39. EMC Capacitors Placement

PACKAGE AND PCB THERMAL DATA

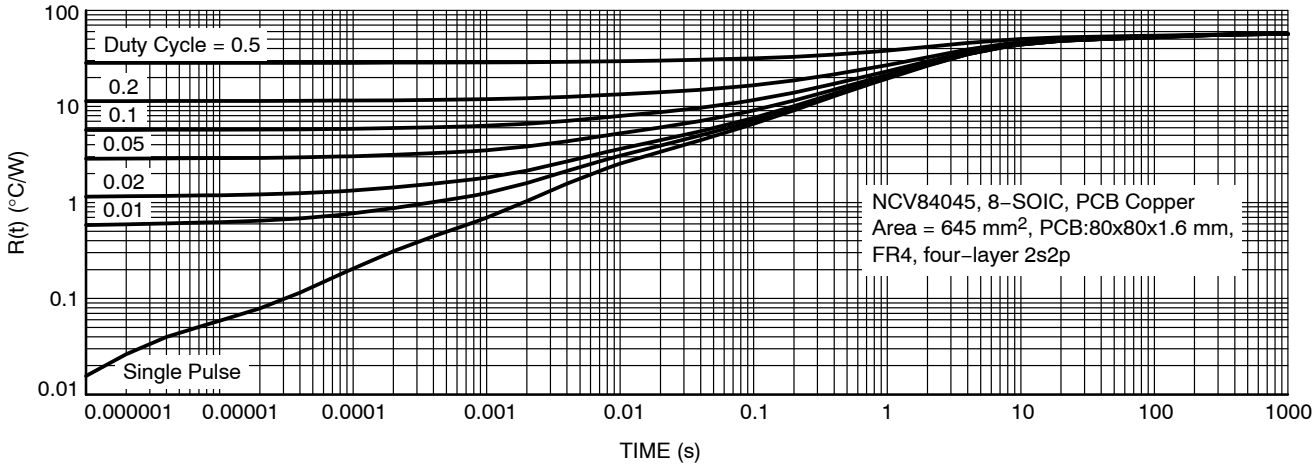

Figure 40. Junction to Ambient Transient Thermal Impedance (645 mm^2 Cu Area)

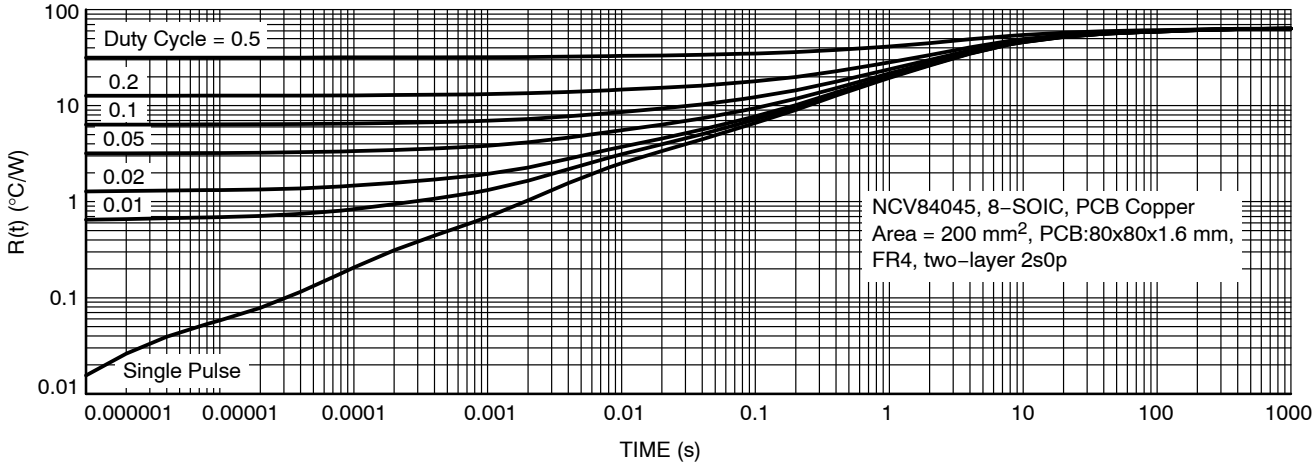

Figure 41. Junction to Ambient Transient Thermal Impedance (2 cm^2 Cu Area)

Share Feedback
Your Opinion Matters

SCALE 1:1

SOIC−8 NB
CASE 751−07
ISSUE AK

DATE 16 FEB 2011

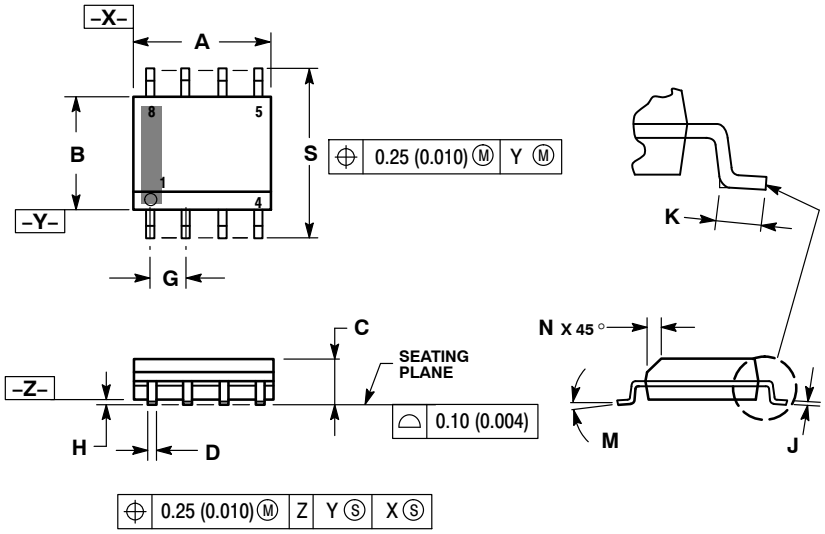

NOTES:
1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETER.
3. DIMENSION A AND B DO NOT INCLUDE MOLD PROTRUSION.
4. MAXIMUM MOLD PROTRUSION 0.15 (0.006) PER SIDE.
5. DIMENSION D DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 (0.005) TOTAL IN EXCESS OF THE D DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. 751−01 THRU 751−06 ARE OBSOLETE. NEW STANDARD IS 751−07.

	MILLIMETERS		INCHES	
DIM	MIN	MAX	MIN	MAX
A	4.80	5.00	0.189	0.197
B	3.80	4.00	0.150	0.157
C	1.35	1.75	0.053	0.069
D	0.33	0.51	0.013	0.020
G	1.27 BSC		0.050 BSC	
H	0.10	0.25	0.004	0.010
J	0.19	0.25	0.007	0.010
K	0.40	1.27	0.016	0.050
M	0°	8°	0°	8°
N	0.25	0.50	0.010	0.020
S	5.80	6.20	0.228	0.244

SOLDERING FOOTPRINT*

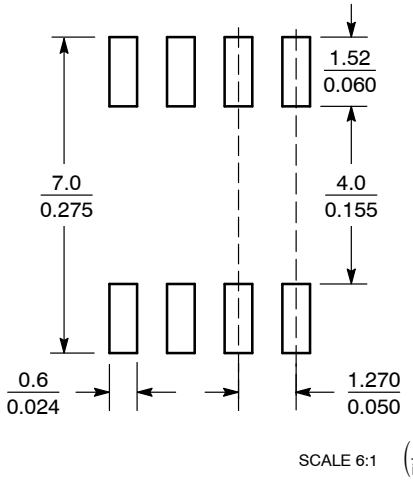

*For additional information on our Pb−Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

GENERIC MARKING DIAGRAM*

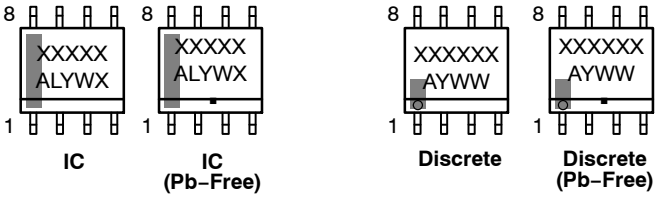

XXXXX = Specific Device Code
A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week
▪ = Pb−Free Package

XXXXXX = Specific Device Code
A = Assembly Location
Y = Year
WW = Work Week
▪ = Pb−Free Package

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

STYLES ON PAGE 2

DOCUMENT NUMBER:	**98ASB42564B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**SOIC−8 NB**		**PAGE 1 OF 2**

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

SOIC−8 NB
CASE 751−07
ISSUE AK

DATE 16 FEB 2011

STYLE 1:
PIN 1. EMITTER
2. COLLECTOR
3. COLLECTOR
4. EMITTER
5. EMITTER
6. BASE
7. BASE
8. EMITTER

STYLE 2:
PIN 1. COLLECTOR, DIE, #1
2. COLLECTOR, #1
3. COLLECTOR, #2
4. COLLECTOR, #2
5. BASE, #2
6. EMITTER, #2
7. BASE, #1
8. EMITTER, #1

STYLE 3:
PIN 1. DRAIN, DIE #1
2. DRAIN, #1
3. DRAIN, #2
4. DRAIN, #2
5. GATE, #2
6. SOURCE, #2
7. GATE, #1
8. SOURCE, #1

STYLE 4:
PIN 1. ANODE
2. ANODE
3. ANODE
4. ANODE
5. ANODE
6. ANODE
7. ANODE
8. COMMON CATHODE

STYLE 5:
PIN 1. DRAIN
2. DRAIN
3. DRAIN
4. DRAIN
5. GATE
6. GATE
7. SOURCE
8. SOURCE

STYLE 6:
PIN 1. SOURCE
2. DRAIN
3. DRAIN
4. SOURCE
5. SOURCE
6. GATE
7. GATE
8. SOURCE

STYLE 7:
PIN 1. INPUT
2. EXTERNAL BYPASS
3. THIRD STAGE SOURCE
4. GROUND
5. DRAIN
6. GATE 3
7. SECOND STAGE Vd
8. FIRST STAGE Vd

STYLE 8:
PIN 1. COLLECTOR, DIE #1
2. BASE, #1
3. BASE, #2
4. COLLECTOR, #2
5. COLLECTOR, #2
6. EMITTER, #2
7. EMITTER, #1
8. COLLECTOR, #1

STYLE 9:
PIN 1. EMITTER, COMMON
2. COLLECTOR, DIE #1
3. COLLECTOR, DIE #2
4. EMITTER, COMMON
5. EMITTER, COMMON
6. BASE, DIE #2
7. BASE, DIE #1
8. EMITTER, COMMON

STYLE 10:
PIN 1. GROUND
2. BIAS 1
3. OUTPUT
4. GROUND
5. GROUND
6. BIAS 2
7. INPUT
8. GROUND

STYLE 11:
PIN 1. SOURCE 1
2. GATE 1
3. SOURCE 2
4. GATE 2
5. DRAIN 2
6. DRAIN 2
7. DRAIN 1
8. DRAIN 1

STYLE 12:
PIN 1. SOURCE
2. SOURCE
3. SOURCE
4. GATE
5. DRAIN
6. DRAIN
7. DRAIN
8. DRAIN

STYLE 13:
PIN 1. N.C.
2. SOURCE
3. SOURCE
4. GATE
5. DRAIN
6. DRAIN
7. DRAIN
8. DRAIN

STYLE 14:
PIN 1. N−SOURCE
2. N−GATE
3. P−SOURCE
4. P−GATE
5. P−DRAIN
6. P−DRAIN
7. N−DRAIN
8. N−DRAIN

STYLE 15:
PIN 1. ANODE 1
2. ANODE 1
3. ANODE 1
4. ANODE 1
5. CATHODE, COMMON
6. CATHODE, COMMON
7. CATHODE, COMMON
8. CATHODE, COMMON

STYLE 16:
PIN 1. EMITTER, DIE #1
2. BASE, DIE #1
3. EMITTER, DIE #2
4. BASE, DIE #2
5. COLLECTOR, DIE #2
6. COLLECTOR, DIE #2
7. COLLECTOR, DIE #1
8. COLLECTOR, DIE #1

STYLE 17:
PIN 1. VCC
2. V2OUT
3. V1OUT
4. TXE
5. RXE
6. VEE
7. GND
8. ACC

STYLE 18:
PIN 1. ANODE
2. ANODE
3. SOURCE
4. GATE
5. DRAIN
6. DRAIN
7. CATHODE
8. CATHODE

STYLE 19:
PIN 1. SOURCE 1
2. GATE 1
3. SOURCE 2
4. GATE 2
5. DRAIN 2
6. MIRROR 2
7. DRAIN 1
8. MIRROR 1

STYLE 20:
PIN 1. SOURCE (N)
2. GATE (N)
3. SOURCE (P)
4. GATE (P)
5. DRAIN
6. DRAIN
7. DRAIN
8. DRAIN

STYLE 21:
PIN 1. CATHODE 1
2. CATHODE 2
3. CATHODE 3
4. CATHODE 4
5. CATHODE 5
6. COMMON ANODE
7. COMMON ANODE
8. CATHODE 6

STYLE 22:
PIN 1. I/O LINE 1
2. COMMON CATHODE/VCC
3. COMMON CATHODE/VCC
4. I/O LINE 3
5. COMMON ANODE/GND
6. I/O LINE 4
7. I/O LINE 5
8. COMMON ANODE/GND

STYLE 23:
PIN 1. LINE 1 IN
2. COMMON ANODE/GND
3. COMMON ANODE/GND
4. LINE 2 IN
5. LINE 2 OUT
6. COMMON ANODE/GND
7. COMMON ANODE/GND
8. LINE 1 OUT

STYLE 24:
PIN 1. BASE
2. EMITTER
3. COLLECTOR/ANODE
4. COLLECTOR/ANODE
5. CATHODE
6. CATHODE
7. COLLECTOR/ANODE
8. COLLECTOR/ANODE

STYLE 25:
PIN 1. VIN
2. N/C
3. REXT
4. GND
5. IOUT
6. IOUT
7. IOUT
8. IOUT

STYLE 26:
PIN 1. GND
2. dv/dt
3. ENABLE
4. ILIMIT
5. SOURCE
6. SOURCE
7. SOURCE
8. VCC

STYLE 27:
PIN 1. ILIMIT
2. OVLO
3. UVLO
4. INPUT+
5. SOURCE
6. SOURCE
7. SOURCE
8. DRAIN

STYLE 28:
PIN 1. SW_TO_GND
2. DASIC_OFF
3. DASIC_SW_DET
4. GND
5. V_MON
6. VBULK
7. VBULK
8. VIN

STYLE 29:
PIN 1. BASE, DIE #1
2. EMITTER, #1
3. BASE, #2
4. EMITTER, #2
5. COLLECTOR, #2
6. COLLECTOR, #2
7. COLLECTOR, #1
8. COLLECTOR, #1

STYLE 30:
PIN 1. DRAIN 1
2. DRAIN 1
3. GATE 2
4. SOURCE 2
5. SOURCE 1/DRAIN 2
6. SOURCE 1/DRAIN 2
7. SOURCE 1/DRAIN 2
8. GATE 1

DOCUMENT NUMBER:	**98ASB42564B**	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	**SOIC−8 NB**		**PAGE 2 OF 2**

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

© Semiconductor Components Industries, LLC, 2019

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales