

# Schottky Barrier Diode NSR0340V2

Schottky barrier diodes are optimized for very low forward voltage drop and low leakage current and are used in a wide range of dc-dc converter, clamping and protection applications in portable devices. NSR0340V2 in a SOD-523 miniature package enables designers to meet the challenging task of achieving higher efficiency and meeting reduced space requirements.

#### **Features**

- Very Low Forward Voltage Drop 410 mV @ 100 mA
- Low Reverse Current 0.5  $\mu A$  @ 25 V  $V_R$
- 250 mA of Continuous Forward Current
- Power Dissipation of 200 mW with Minimum Trace
- Very High Switching Speed
- Low Capacitance  $C_T = 6 pF$
- This is a Pb-Free Device

# **Typical Applications**

- LCD and Keypad Backlighting
- Camera Photo Flash
- Buck and Boost dc-dc Converters
- Reverse Voltage and Current Protection
- Clamping & Protection

#### **Markets**

- Mobile Handsets
- MP3 Players
- Digital Camera and Camcorders
- Notebook PCs and PDAs
- GPS

## **MAXIMUM RATINGS**

Rating	Symbol	Value	Unit
Reverse Voltage	$V_R$	40	Vdc
Forward Continuous Current (DC)	IF	250	mA
Non-Repetitive Peak Forward Surge Current	I <sub>FSM</sub>	1.0	Α
ESD Rating: Human Body Model Machine Model	ESD	Class 2 Class A	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

# 40 VOLT SCHOTTKY BARRIER DIODE





# **MARKING DIAGRAM**



AD = Device Code

M = Date Code\*

= Pb-Free Package

(Note: Microdot may be in either location)

Date Code orientation position may vary depending upon manufacturing location.

# **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NSR0340V2T1G	SOD-523 (Pb-Free)	3000 / Tape & Reel
NSR0340V2T5G	SOD-523 (Pb-Free)	8000 / Tape & Reel

† For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specification Brochure, BRD8011/D.


#### THERMAL CHARACTERISTICS

Characteristic	Symbol	Max	Unit	
Thermal Resistance Junction-to-Ambient (Note 1) Total Power Dissipation @ T <sub>A</sub> = 25 °C	$egin{array}{c} R_{ hetaJA} \ P_D \end{array}$	600 200	°C/W mW	
Thermal Resistance Junction-to-Ambient (Note 2) Total Power Dissipation @ T <sub>A</sub> = 25 °C	R <sub>θJA</sub> P <sub>D</sub>	300 400	°C/W mW	
Junction and Storage Temperature Range	T <sub>J</sub> , T <sub>stg</sub>	-55 to +150	°C	

- 1. Mounted onto a 4 in square FR-4 board 10 mm sq. 1 oz. Cu 0.06" thick single-sided. Operating to steady state.
- 2. Mounted onto a 4 in square FR-4 board 1 in sq. 1 oz. Cu 0.06" thick single-sided. Operating to steady state.

# **ELECTRICAL CHARACTERISTICS** (T<sub>A</sub> = 25 °C unless otherwise noted)

Characteristic	Symbol	Min	Тур	Max	Unit
Reverse Leakage	I <sub>R</sub>		0.2 0.5 1.5	1.0 3.0 6.0	μА
Forward Voltage (I <sub>F</sub> = 10 mA) (I <sub>F</sub> = 100 mA) (I <sub>F</sub> = 200 mA)	V <sub>F</sub>		310 410 470	350 450 510	mV
Total Capacitance (V <sub>R</sub> = 10 V, f = 1 MHz)	СТ		6.0		pF
Reverse Recovery Time $(I_F = I_R = 10 \text{ mA}, I_R = 1.0 \text{ mA})$	t <sub>rr</sub>		5.0		ns

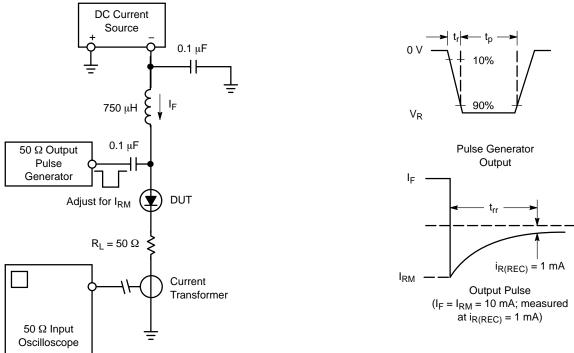

- 1. DC Current Source is adjusted for a Forward Current (I<sub>F</sub>) of 10 mA.
- Pulse Generator Output is adjusted for a Peak Reverse Recovery Current I<sub>RM</sub> of 10 mA.
   Pulse Generator transition time << t<sub>rr</sub>.
- 4.  $I_{R(REC)}$  is measured at 1 mA. Typically 0.1 X  $I_{RM}$  or 0.25 X  $I_{RM}.$
- 5.  $t_p \gg t_{rr}$

Figure 1. Recovery Time Equivalent Test Circuit

# NSR0340V2

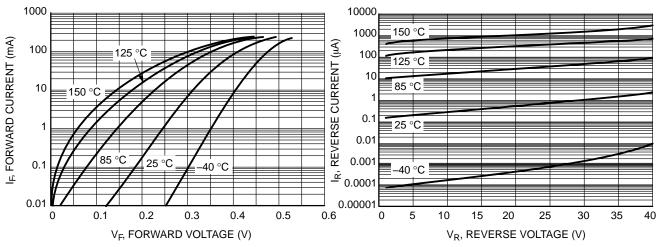


Figure 2. Forward Voltage

Figure 3. Leakage Current

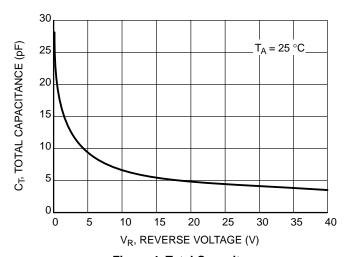


Figure 4. Total Capacitance

# NSR0340V2

# **REVISION HISTORY**

Revision	Description of Changes	Date
2	Rebranded the Data Sheet to <b>onsemi</b> format.	6/16/2025






# SOD-523 1.20x0.80x0.60 CASE 502 ISSUE F

**DATE 08 FEB 2024** 

## NOTES:


- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018. 1.
- CONTROLLING DIMENSION: MILLIMETERS.
- MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH, MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
- DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

	MILLIMETERS		
DIM	MIN.	N□M.	MAX.
А	0.50	0.60	0.70
b	0.25	0.30	0.35
C	0.07	0.14	0.20
D	1.10	1.20	1.30
Е	0.70	0.80	0.90
Н	1.50	1.60	1.70
L	0.30 REF		
L2	0.15	0.20	0.25

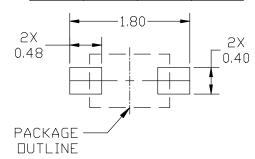



# RECOMMENDED MOUNTING FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference manual SOLDERRM/D.

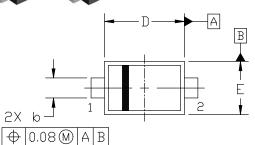






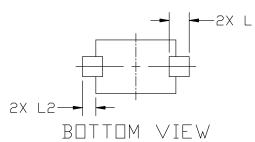

# **GENERIC MARKING DIAGRAM\***



= Specific Device Code XX Date Code М

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "■", may or may not be present. Some products may not follow the Generic Marking.

STYLE 1: PIN 1. CATHODE (POLARITY BAND)

STYLE 2: NO POLARITY

**DOCUMENT NUMBER:** 98AON11524D Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.

**DESCRIPTION:** SOD-523 1.20x0.80x0.60 PAGE 1 OF 1

onsemi and ONSEMi, are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales