



Is Now Part of



ON Semiconductor®

To learn more about ON Semiconductor, please visit our website at
www.onsemi.com

Please note: As part of the Fairchild Semiconductor integration, some of the Fairchild orderable part numbers will need to change in order to meet ON Semiconductor's system requirements. Since the ON Semiconductor product management systems do not have the ability to manage part nomenclature that utilizes an underscore (_), the underscore (_) in the Fairchild part numbers will be changed to a dash (-). This document may contain device numbers with an underscore (_). Please check the ON Semiconductor website to verify the updated device numbers. The most current and up-to-date ordering information can be found at www.onsemi.com. Please email any questions regarding the system integration to Fairchild_questions@onsemi.com.

ON Semiconductor and the ON Semiconductor logo are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.



FAN7601B 绿色电流模式 PWM 控制器

特性

- 绿色电流模式 PWM 控制
- 低工作电流：最大值 4 mA
- 间歇模式运行
- 内部高压启动开关
- 欠压锁定 (UVLO) 12 V / 8 V
- 闩锁保护和软启动功能
- 过压保护：19 V
- 工作频率高达 300 kHz
- 最大占空比：95%

应用

- 离线适配器应用
- 辅助电源

相关资源

- [AN4129—绿色电流模式 PWM 控制器 FAN7601](#)

说明

FAN7601B 是一款可编程频率绿色电流模式 PWM 控制器。它特别为需要在轻负载和空载条件下具有高效率的离线适配器应用和辅助电源而设计。内部高压启动开关和间歇模式减少了功率损耗。

FAN7601B 包含保护功能，例如闩锁保护和过压保护。闩锁保护可用于过压保护、热保护及其他功能。软启动防止启动时的输出电压过冲。

订购信息

器件编号	工作结温	顶标	封装	包装方法
FAN7601BMX	-40°C 至 +150°C	7601B	8-SOP	卷带和卷盘

框图

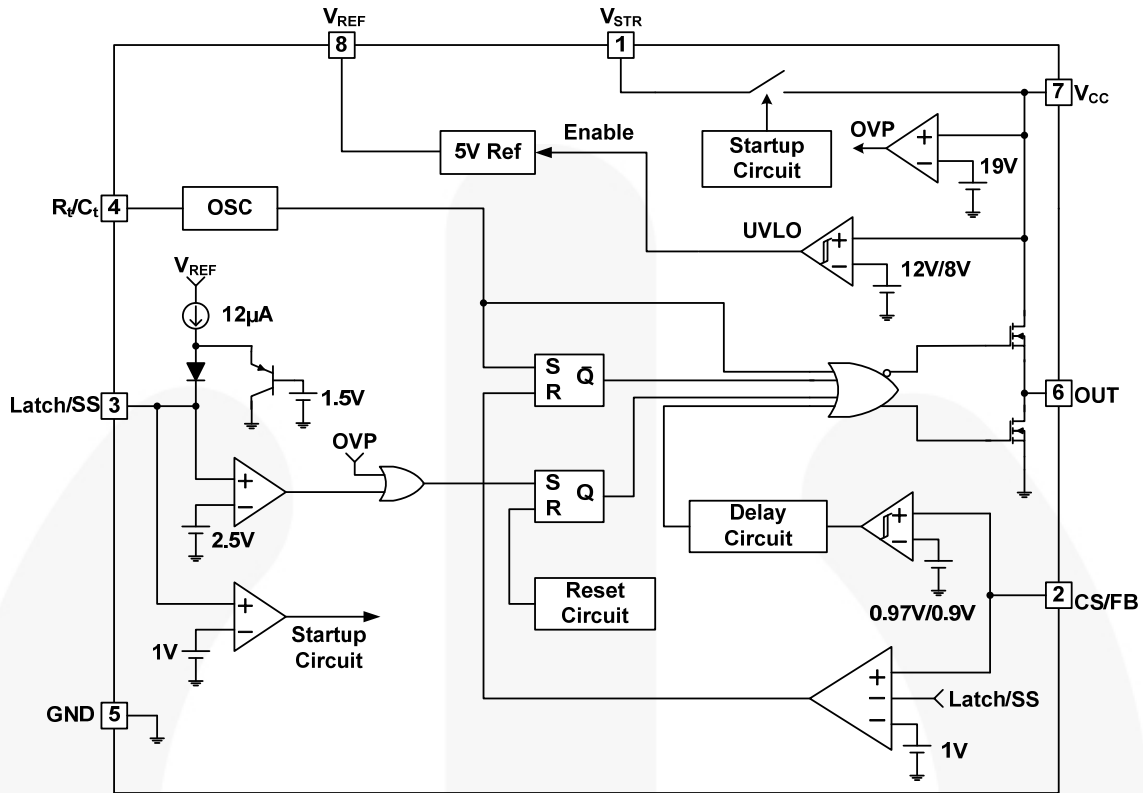


图 1. 内部框图

引脚配置

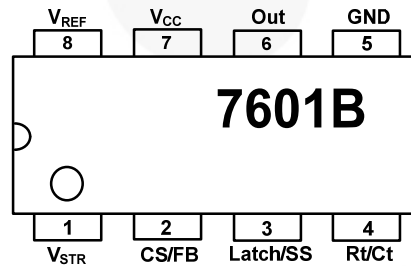


图 2. 引脚分配 (顶视图/俯视图)

引脚定义

引脚编号 (8 引脚)	名称	说明
1	V_{STR}	启动
2	CS/FB	电流检测与反馈
3	门锁/软启动	门锁保护和软启动功能
4	Rt/Ct	振荡器定时
5	GND	接地
6	输出	栅极驱动输出
7	V_{CC}	IC 电源
8	V_{REF}	参考电压

绝对最大额定值

应力超过绝对最大额定值，可能会损坏器件。在超出推荐的工作条件的情况下，该器件可能无法正常工作，所以不建议让器件在这些条件下长期工作。此外，长期在高于推荐的工作条件下工作，会影响器件的可靠性。绝对最大额定值仅是应力规格值。

符号	参数		最小值	最大值	单位
V_{CC}	电源电压			20	V
$V_{CS/FB}$	输入电压 CS/FB		-0.3	20.0	V
T_{STG}	存储温度		-55	+150	°C
T_J	建议工作结温		-40	+150	°C
I_O	输出电流			250	mA
V_{STR}	V_{STR} 输出电压			500	V
ESD	静电放电能力	人体放电模型, JESD22-A114		2000	V
		元件充电模型, JESD22-C101		1500	

热阻测试

符号	参数	数值	单位
θ_{JA}	结至环境热阻	180	°C/W

电气特性

除非另有说明, $T_A = -25^{\circ}\text{C} \sim 125^{\circ}\text{C}$, $V_{CC} = 14\text{ V}$, $R_T = 9.5\text{ k}\Omega$, $C_T = 2.2\text{ nF}$ 。

符号	参数	工作条件	最小值	典型值	最大值	单位
基准部分						
V_{REF}	参考输出电压	$I_O = 1\text{ mA}$	4.85	5.00	5.15	V
ΔV_{REF1}	线路调节	$V_{CC} = 10\text{ V} \sim 18\text{ V}$		10	20	mV
ΔV_{REF2}	负载调节	$I_O = 1\text{ mA} \sim 10\text{ mA}$		20	30	mV
振荡器部分						
f_{OSC}	初始精确度		90	100	110	kHz
ST_V	稳压	$V_{CC} = 10\text{ V} \sim 18\text{ V}$		1.0	1.5	%
V_{OSC}	振幅	V_{pin4} 峰-峰		1.25		V
PWM 部分						
$V_{CS/FB1}$	CS/FB 阈值电压 1		0.9	1.0	1.1	V
D_{MAX}	最大占空比	$T_A = 25^{\circ}\text{C}$	92	95	98	%
D_{MIN}	最小占空比				0	%
间歇模式部分						
$V_{CS/FB2}$	CS/FB 阈值电压 2 ⁽¹⁾		0.77	0.97	1.17	V
$V_{CS/FB3}$	CS/FB 阈值电压 3 ⁽¹⁾		0.7	0.9	1.1	V
软启动部分						
I_{SS}	软启动电流	$V_{pin3} = \text{GND}$	9	12	15	μA
V_{SL}	软启动限压 ⁽²⁾	$I_{SS} = 1\text{ }\mu\text{A}$	1.2	1.5	1.8	V
保护部分						
V_{LATCH}	门锁电压		2.25	2.50	2.75	V
V_{OVP}	过压保护		18	19	20	V
UVLO 部分						
V_{TH}	启动阈值电压		11	12	13	V
V_{TL}	最大工作电压		7	8	9	V
总电流部分						
I_{OP}	工作电源电流			3	4	mA
输出部分						
V_{OL}	低输出电压	$T_A = 25^{\circ}\text{C}$, $I_O = 100\text{ mA}$		2.0	2.5	V
V_{OH}	高输出电压	$T_A = 25^{\circ}\text{C}$, $I_O = -100\text{ mA}$	11.5	12.0	14.0	V
t_r	上升时间 ⁽¹⁾	$T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$		45	150	ns
t_f	下降时间 ⁽¹⁾	$T_A = 25^{\circ}\text{C}$, $C_L = 1\text{ nF}$		35	150	ns
启动部分						
I_{STR}	V_{STR} 启动电流	$V_{STR} = 30\text{V}$, $T_A = 25^{\circ}\text{C}$	0.5	1.0	1.5	mA

注意:

- 该参数由设计保证; 未经 100% 产品测试。
- 建议在 Ω 门锁/软启动引脚和地之间连接一个 1 M 电阻器, 用于防止门锁保护功能因噪声耦合而异常运行。

典型性能特征

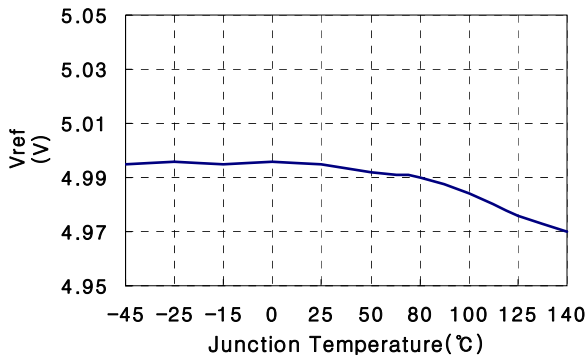


图 3. 削波参考电压

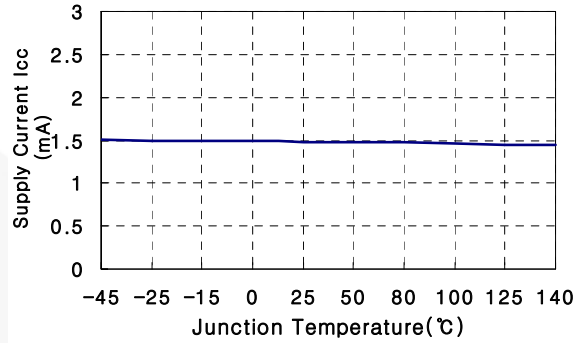


图 4. 电源电流

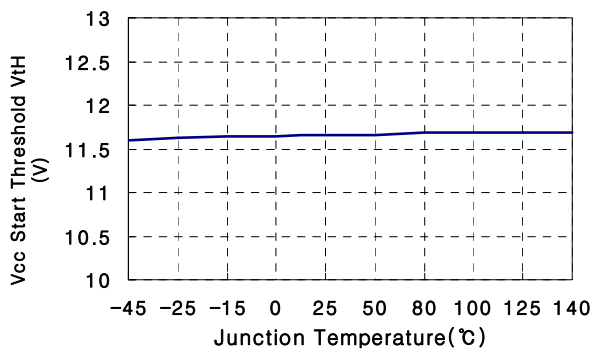


图 5. V_{CC} 启动阈值电压

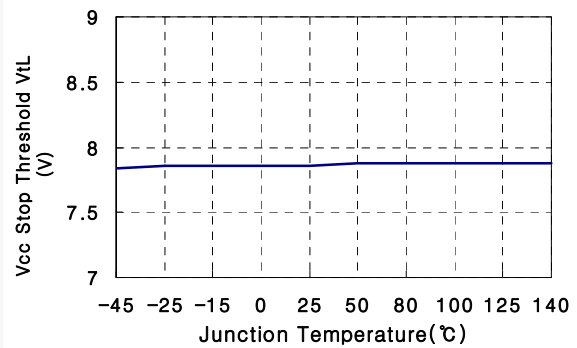


图 6. V_{CC} 停止阈值电压

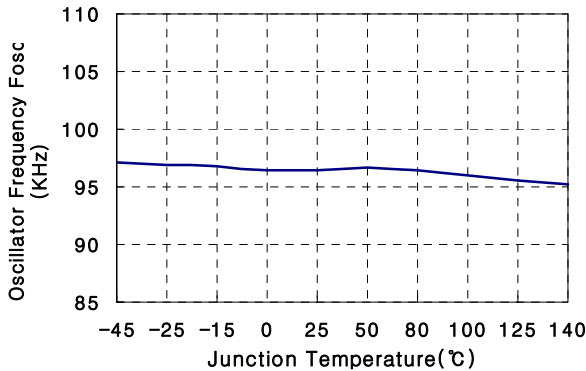


图 7. 振荡器频率

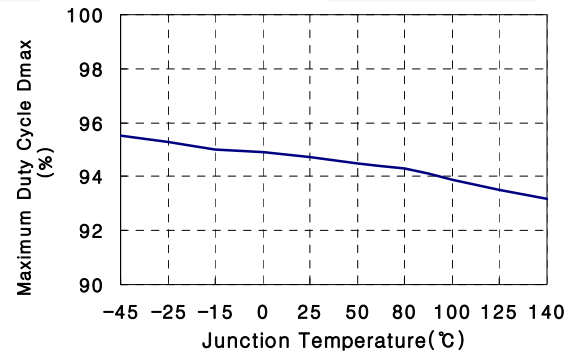


图 8. 最大占空比

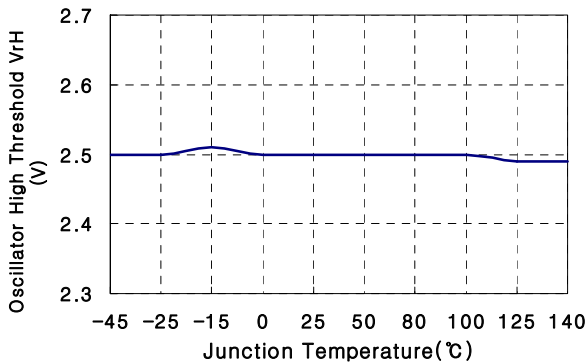


图 9. 振荡器高阈值电压

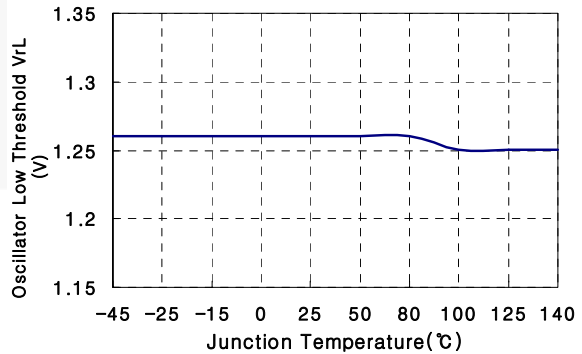


图 10. 振荡器低阈值电压

典型性能特征 (接上页)

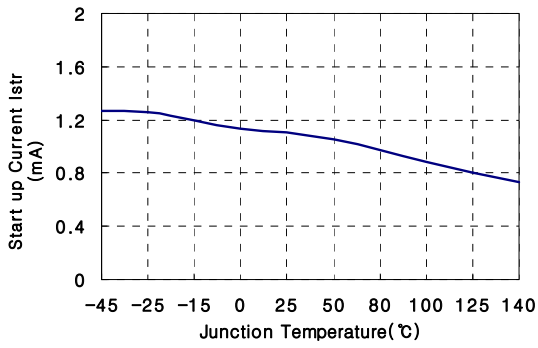


图 11. 启动电流

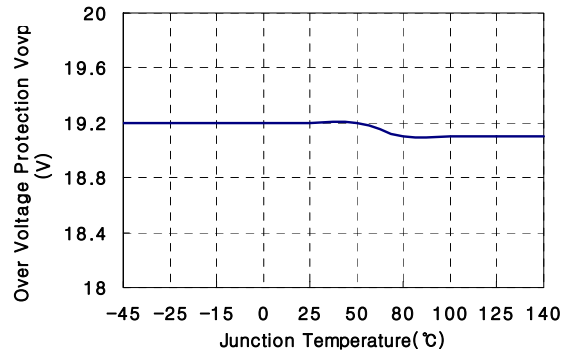


图 12. 过压保护电平

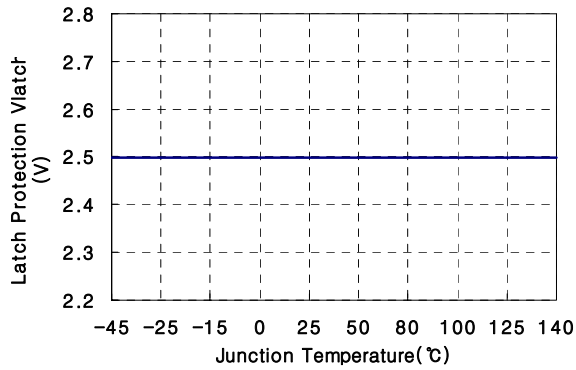


图 13. 门锁保护电压

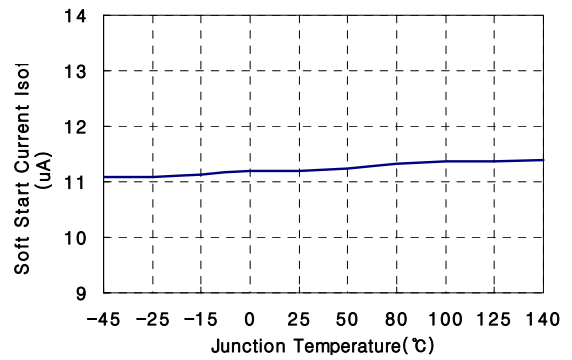


图 14. 软启动电流






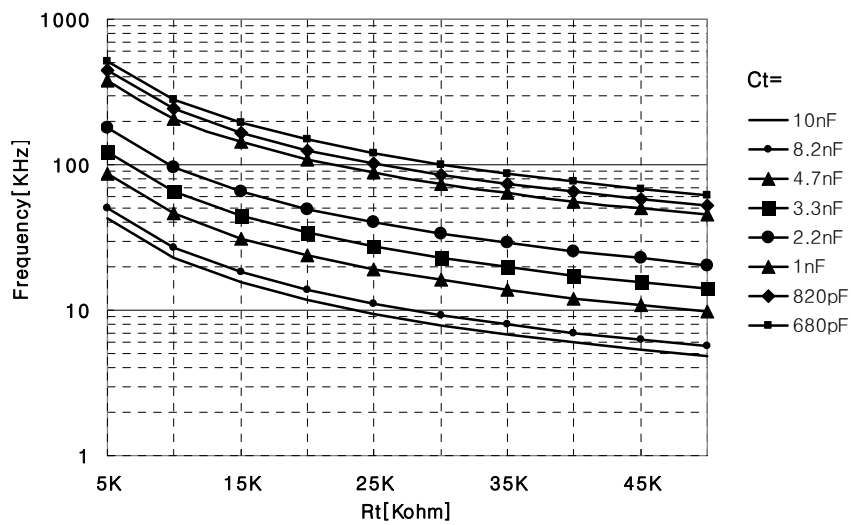


图 15. 振荡器频率特性

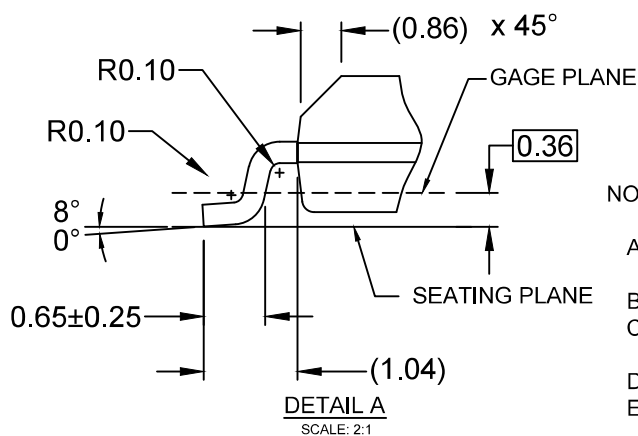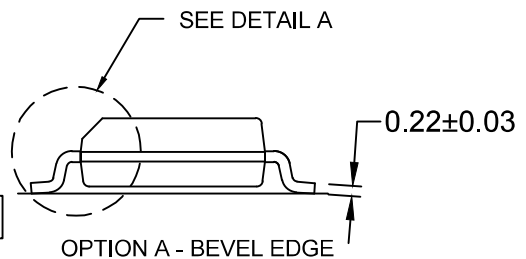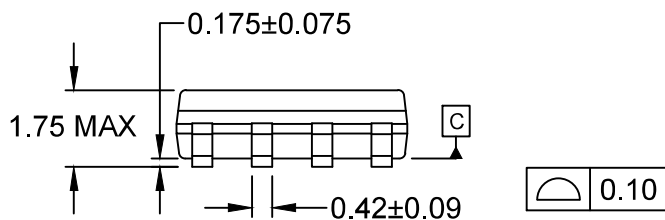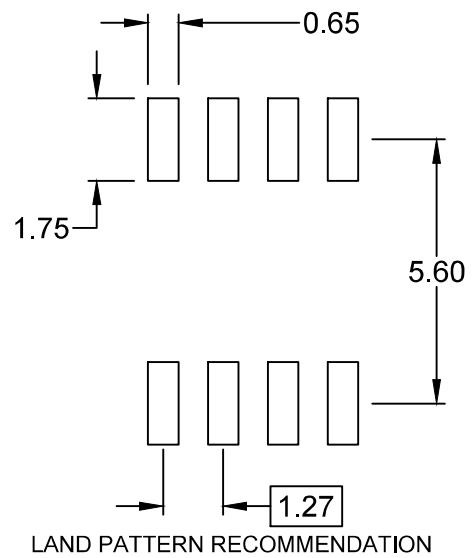

NOTES:

- A) THIS PACKAGE CONFORMS TO JEDEC MS-012, VARIATION AA.
- B) ALL DIMENSIONS ARE IN MILLIMETERS.
- C) DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
- D) LANDPATTERN STANDARD: SOIC127P600X175-8M
- E) DRAWING FILENAME: M08Arev16

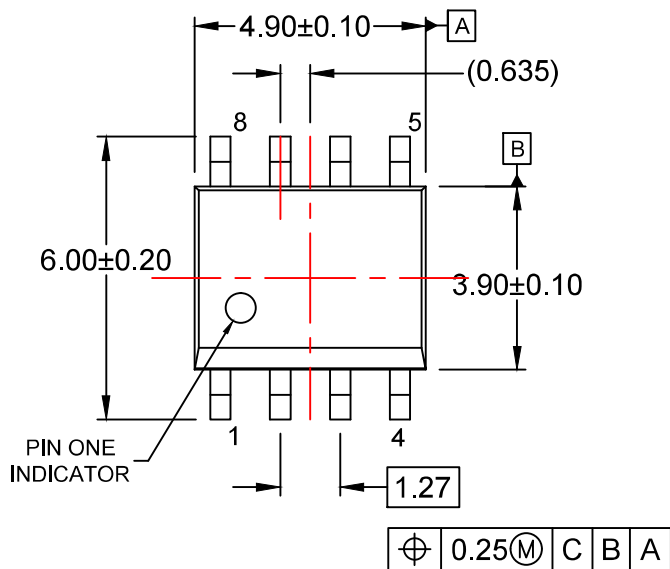

ON Semiconductor and  are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify and hold ON Semiconductor and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that ON Semiconductor was negligent regarding the design or manufacture of the part. ON Semiconductor is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

PUBLICATION ORDERING INFORMATION

LITERATURE FULFILLMENT:

Literature Distribution Center for ON Semiconductor
19521 E. 32nd Pkwy, Aurora, Colorado 80011 USA
Phone: 303-675-2175 or 800-344-3860 Toll Free USA/Canada
Fax: 303-675-2176 or 800-344-3867 Toll Free USA/Canada
Email: orderlit@onsemi.com

N. American Technical Support: 800-282-9855 Toll Free
USA/Canada
Europe, Middle East and Africa Technical Support:
Phone: 421 33 790 2910
Japan Customer Focus Center
Phone: 81-3-5817-1050

ON Semiconductor Website: www.onsemi.com
Order Literature: <http://www.onsemi.com/orderlit>
For additional information, please contact your local
Sales Representative