

# USB Type-C VCONN Overvoltage Protection IC

### **NCP398**

The NCP398 is an overvoltage protection device. It protects VCONN against overvoltages in applications where VCONN is directly derived from the VBUS supply.

At power up, the integrated power MOSFET is automatically controlled to reduce inrush current. The IC continuously monitors undervoltage, overvoltage and thermal events. In case of overvoltage, a very high speed comparator opens the power MOSFET instantaneously.


The part is enabled through the  $\overline{EN}$  pin. A high level on this pin allows forcing off the internal switch and drastically decreases the current consumption of the NCP398 core.

#### **Features**

- Over-voltage Protection up to +28 V
- On–chip Low  $R_{dson}$  NMOS Transistors: Typical 200 m $\Omega$
- Over-voltage Lockout (OVLO)
- Shutdown EN Input
- Output Discharge Path
- WLCSP4 Package 0.84 x 0.84 mm, 0.4p
- UDFN6 Package 2 x 2 mm, 0.65p
- These Parts are ROHS Devices

#### **Typical Applications**

- Type-C USB
- Smartphones
- Tablets

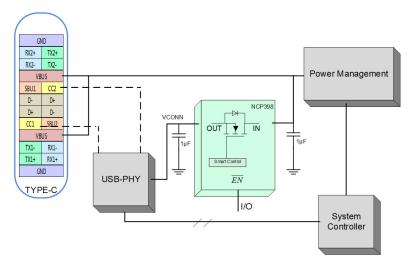

**Figure 1. Typical Application Circuit** 

1

#### MARKING DIAGRAMS



**CASE 517AB** 

# AV M=

AV = Specific Device Code

M = Date Code

■ = Pb–Free Package

(Note: Microdot may be in either location)




#### WLCSP4 CASE 567MN




AA = Specific Device Code A = Assembly Location

Y = Year W = Work Week

#### **PIN CONNECTIONS**





(Top Views)

#### ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 11 of this data sheet.

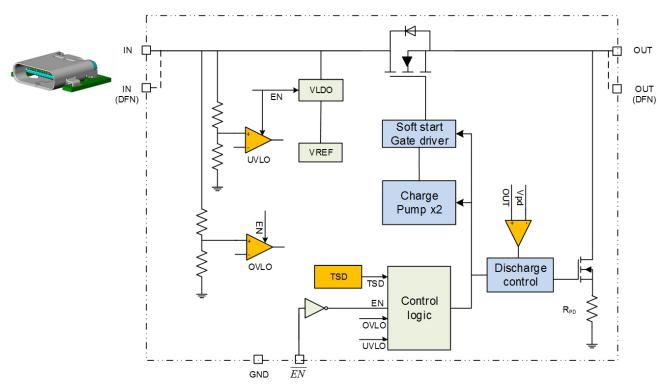


Figure 2. Simplified Block Diagram, WLCSP and UDFN Packages

**Table 1. CSP PINOUT DESCRIPTION** 

Pin	Pin Name	Туре	Description
A1	OUT	OUTPUT	Output voltage pin. The OUT pin must be connected to the circuitry that is to be protected (VCONN rail).
B1	EN	I/O	Enable pin bar.  The device enters in shutdown mode when this pin is tied high in which case the output is disconnected from the input.
A2	IN	POWER	Input voltage pin. The IN pin must be connected to the input power supply (VBUS).
B2	GND	POWER	Ground.  Must be connected to the system GND plane.

#### **Table 2. DFN PINOUT DESCRIPTION**

Pin	Pin Name	Туре	Description
1,2	IN	POWER	Input voltage pins.  The two IN pins must be hardwired together and are connected to the input power supply (VBUS).
3	GND	POWER	Ground.  Must be connected to the system GND plane.
5,6	OUT	POWER	Output voltage pins.  The two OUT pins must be hardwired together and are connected to the circuitry that is to be protected (VCONN rail).
4	ĒN	I/O	Enable pin bar.  The device enters in shutdown mode when this pin is tied high in which case the output is disconnected from the input.
7	PAD	POWER	DFN package back side pad. Must be connected to ground plane for thermal dissipation optimization.

**Table 3. MAXIMUM RATINGS** 

Rating		Symbol	Value	Unit
Minimum Voltage (All to GND)		V <sub>MIN</sub>	-0.3	V
Maximum Voltage (Ins to GND)		V <sub>INMAX</sub>	29	V
Maximum Voltage (All others to GND)		V <sub>MAX</sub>	7	V
Maximum DC current		I <sub>MAX</sub>	0.8	Α
Thermal Resistance, Junction to Air	WLCSP (Note 1) DFN (Note 1)	$R_{ hetaJA}$	170 145	°C/W
Operating Ambient Temperature Range		T <sub>A</sub>	-40 to +85	°C
Storage Temperature Range		T <sub>STG</sub>	-65 to +150	°C
Junction Operating temperature		T <sub>J</sub>	+125	°C
Human Body Model (HBM) ESD Rating are (Note 2)		ESD HBM	2	kV
Charged Device Model (CDM) ESD Rating are (Note 2)		ESD CDM	1	kV
Latch Up Current (Note 3)		I <sub>LU</sub>	100	mA
Moisture Sensitivity		MSL	Level 1	

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

<sup>1.</sup> The  $R_{\theta JA}$  is highly dependent on the PCB heat sink area. As example UDFN6  $R_{\theta JA}$  is 220°C/W with 50 mm<sup>2</sup> (copper 35  $\mu$ m, 1 oz) and Human Body Model, 100 pF discharged through a 1.5 kΩ resistor following specification JESD22/A114, Charged Device Model (CDM) per

JEDEC standard: JESD22-C101 Class IV.

<sup>3.</sup> Latch Up Current per JEDEC standard: JESD78 class II.

#### **Table 4. ELECTRICAL CHARACTERISTICS**

Min / Max limits values (-40°C <  $T_A$  < +85°C) and  $V_{IN}$  = +5 V (Unless otherwise noted). Typical values are  $T_A$  = +25°C.

Characteristics	Symbols	Conditions	Min	Тур	Max	Unit
Input Voltage Range	V <sub>IN</sub>		-	-	28	V
Under Voltage Lockout	UVLO	Vin rising	2.4	-	2.8	V
Under Voltage Lockout Hysteresis	UVLO <sub>HYST</sub>	Vin falling	-	50	-	mV
Over voltage Lockout Threshold	OVLO (Note 4)	Vin rising	5.50	5.65	5.80	V
Over voltage Lockout Threshold hysteresis	OVLO <sub>HYST</sub>	Vin falling	-	115	-	mV
Vin versus Vout Resistance	R <sub>DSON</sub>	Vin = 5 V, EN = low, 25°C, WLCSP	-	190	220	mΩ
		-40°C < T <sub>J</sub> < 85°C, WLCSP	-	230	260	
		Vin = 5 V, EN = low, 25°C, UDFN	-	230	260	1
		-40°C < T <sub>J</sub> < 85°C, UDFN	-	270	300	
Supply Quiescent Current	I <sub>DD</sub>	No load. EN = low	-	40	60	μΑ
OFF current	I <sub>OFF</sub>	EN = high	-	_	1.5	μΑ
Standby current	I <sub>STB</sub>	Vin = 2.4 V	-	-	2.5	μΑ
Output Discharge path	R <sub>PD</sub>	From $\overline{EN}$ = low to high or Vin < UVLO – hysteresis to Vout = $V_{PD}$	8	10	12	kΩ
Output Discharge path level	V <sub>PD</sub>	Vout falling	-	0.63	-	V
EN						
EN Voltage High	V <sub>IH</sub>		1.2	_	-	V
EN Voltage Low	V <sub>IL</sub>		-	-	0.4	V
EN Input Leakage Current	IEN	0 < V <sub>EN</sub> < 5.5 V	-1	0	+1	μΑ
TIMINGS						
Ton Time	T <sub>ON</sub>	Vin valid, From EN high to low, 90% Vout	_	0.3	1	ms
Disable Time	T <sub>OFF</sub>	From $\overline{\text{EN}}$ low to high, to 90% Vout. R <sub>LOAD</sub> 100 $\Omega$	-	10	-	μS
OVLO Turn Off Time	T <sub>OVLO</sub>	Vin exceeding $V_{OVLO}$ at 2 $V/\mu s$ to Vout starts decreasing. $R_{LOAD}$ 100 $\Omega$	-	100	-	ns
TSD						
Thermal shutdown	TSD		_	150	_	°C
Thermal shutdown rearming	TSD rearm		-	125	-	°C

<sup>4.</sup> Please contact your ON representative for additional OVLO thresholds.

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

#### Operation

The NCP398 device provides overvoltage protection when a wrong input supply is connected or voltage ringing appears on the input line. The internal NMOS Fet is soft start controlled to limit inrush current into the load (capacitors, IC wake up).

The device integrates an enable control pin, undervoltage and overvoltage comparators, and output discharge path to eliminate residual voltage after the turn off.

#### **Timings Chronogram and States Description**

The phase 1 sections described below are respectively the OFF state ( $\overline{\text{EN}}$  high) and the standby state (VIN < UVLO)

of the device. When  $\overline{\text{Vin}}$  is below the undervoltage comparator (UVLO) or  $\overline{\text{EN}}$  is tied high, NCP398 will be in this state

Phase 2 corresponds to the defined time for the gate driver soft start. Referring to the electrical parameter, this phase is aligned to Ton time.

Phase 3 is the normal operation, with Vin valid, the part enabled and there is no fault.

The behavior during an overvoltage condition is detailed in the phase number 4.

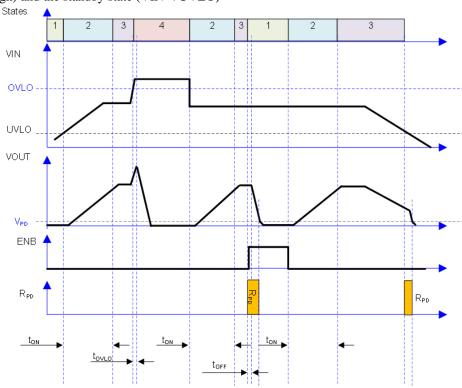


Figure 3. Timings Diagram

#### Enable Bar Pin (EN)

The part is enabled through the  $\overline{EN}$  pin. In some diagrams and figures, ENB refers to  $\overline{EN}$ . A high level on this pin allows forcing off the internal switch and drastically decreases the current consumption of the NCP398 core. To exit the OFF state, the  $\overline{EN}$  pin must be tied low.

#### Under-voltage Lockout (UVLO)

To ensure proper operation under any conditions, the device integrates an under-voltage lock out (UVLO) comparator. This block has a built-in hysteresis to provide noise immunity to transient conditions.

#### Over-voltage Lockout (OVLO)

To protect connected systems on  $V_{OUT}$  pin from over–voltage, a second comparator, over–voltage lock out (OVLO), is embedded. During over–voltage condition, the output remains disabled until the input voltage drops below the OVLO – comparator hysteresis.

#### Auto Discharge - R<sub>PD</sub>

When disabling the NCP398 the output gets automatically discharged by means of the internal pull down resistor Rpd. Once reaching the Vpd level the discharge path is disabled. The auto–discharge is also engaged when Vin drops below the UVLO threshold. The auto–discharge ensures a proper power cycling of peripherals connected to the output of the NCP398.


#### **Thermal Shutdown Protection**

In case of internal overheating, the integrated thermal shutdown (TSD) protection will open the internal NMOS FET in order to instantaneously decrease the device temperature.

Embedded hysteresis allows reengaging the NMOS FET when the junction temperature decreases.

This OFF-ON cycle is repeated until the fault event disappears.


#### TYPICAL CHARACTERISTICS



400 350  $V_{IN} = 2.8 \text{ V}$ 300 R<sub>DSON</sub> (mΩ) 250  $V_{IN} = 5.0 \text{ V}$ 200 150 100 50 0 -20 20 40 60 80 100 120 -40 0 TEMPERATURE (°C)

Figure 4. Ron vs. Vin, Overtemperature

Figure 5. Ron vs. Temperature, at Fixed Vin Voltage







Figure 6. Standby Current vs. Vin, Over Temperature

Figure 7. Standby Current vs. Vin, Over Temperature






Figure 8. Quiescent Current vs. Vin, Over Temperature

Figure 9. Quiescent Current vs. Vin, Over Temperature

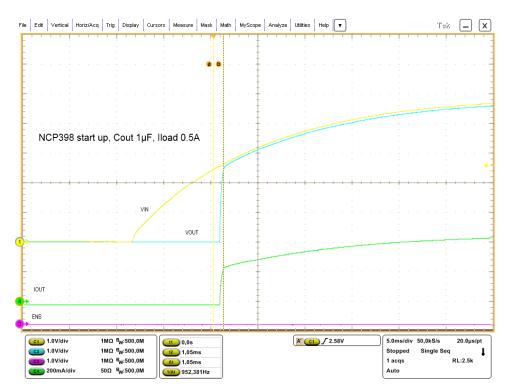


Figure 10. Soft Start Up On Load, Vin: yellow, Vout: blue, EN: pink, IOUT: green

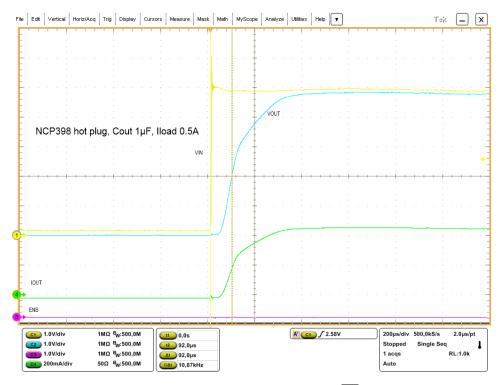


Figure 11. Hot Plug On Load, Vin: yellow, Vout: blue, EN: pink, IOUT: green

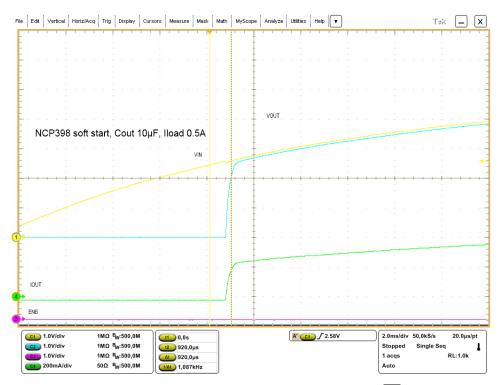


Figure 12. Soft Start On Cout 10 μF, 500 mA, Vin: yellow, Vout: blue, EN: pink, IOUT: green

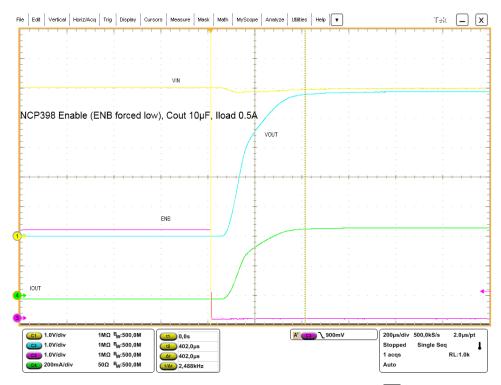


Figure 13. NCP398 Enable (ENB forced low) Vin: yellow, Vout: blue, EN: pink, IOUT: green

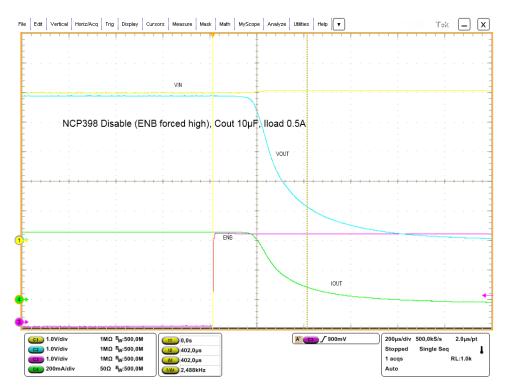


Figure 14. NCP398 Disable (ENB forced high) Vin: yellow, Vout: blue, EN: pink, IOUT: green

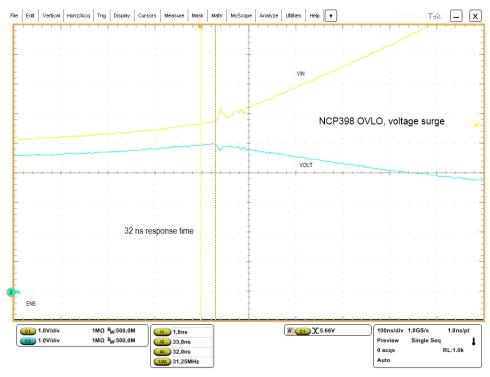


Figure 15. NCP398 Overvoltage Time Response, Vin: yellow, Vout: blue

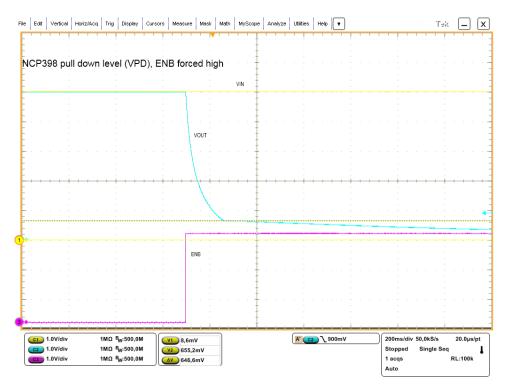


Figure 16. NCP398 Pull Down Level (following disable) Vin: yellow, Vout: blue, EN: pink

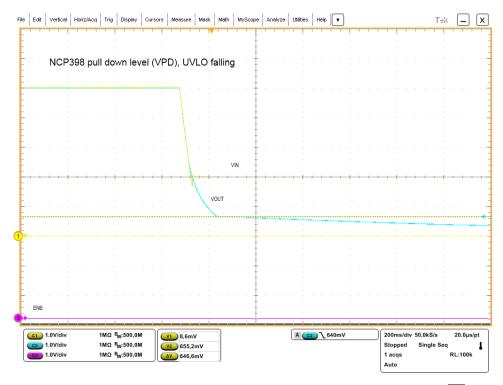


Figure 17. NCP398 Pull Down Level (following UVLO) Vin: yellow, Vout: blue, EN: pink


#### **ORDERING INFORMATION**

Device	Marking	Package	Shipping <sup>†</sup>
NCP398FCCT1G	AA	WLCSP4 0.84x0.84 mm	3000 Tape / Reel
NCP398MUTBG	AV	UDFN6 2x2 mm	3000 Tape / Reel

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.





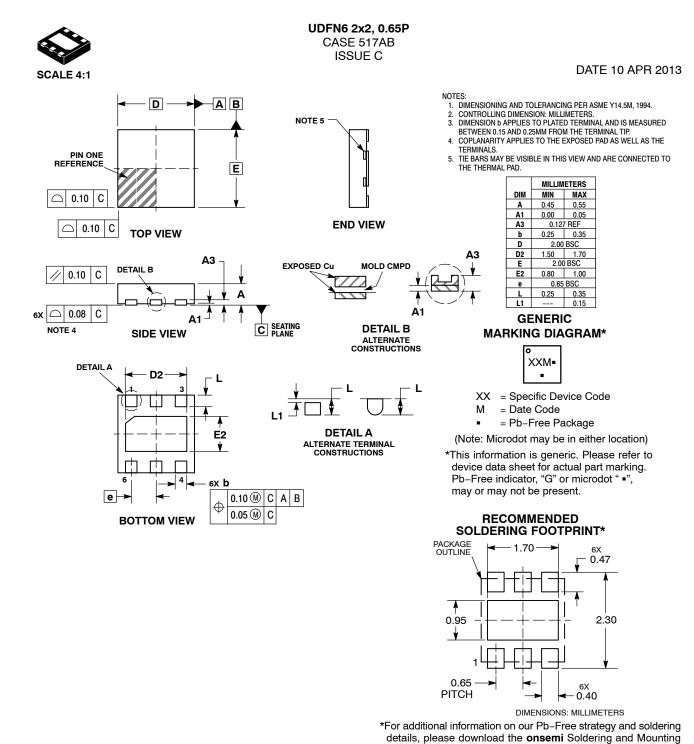

DOCUMENT NUMBER:	98AON22162D	Electronic versions are uncontrolled except when accessed directly from the Document R Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.	
DESCRIPTION:	UDFN6 2X2. 0.65P		PAGE 1 OF 1

Techniques Reference Manual, SOLDERRM/D.

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.






#### WLCSP4, 0.84x0.84x0.554 CASE 567MN **ISSUE B**


**DATE 14 JUN 2022** 

#### NOTES:

- DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
- CONTROLLING DIMENSION: MILLIMETERS
- DIMENSION & IS MEASURED AT THE MAXIMUM SOLDER BALL DIAMETER PARALLEL TO DATUM C.
- 4. COPLANARITY APPLIES TO THE SPHERICAL CROWNS OF THE SOLDER BALLS.
- DATUM C, THE SEATING PLANE, IS DEFINED BY THE SPHERICAL CROWNS OF THE SOLDER BALLS.




DIM	MILLIMETERS				
ויונע	MIN.	N□M.	MAX.		
А	0.509	0.554	0.599		
A1	0.174	0.194	0.214		
A2	0.310	0.335	0.360		
А3	0.025 BSC				
b	0.239 0.269 0.299				
D	0.84 BSC				
Ε	0.84 BSC				
е	0.40 BSC				




#### RECOMMENDED MOUNTING FOOTPRINT\*

For additional information on our Pb-Free strategy and soldering details, please download the DN Semiconductor Soldering and Mounting Techniques Reference Manual, SDLDERRM/D.

## PIN 1 REFERENCE 2X 0.05 C 2X 0.05 C TOP VIEW







BOTTOM VIEW

#### **GENERIC MARKING DIAGRAM\***



= Assembly Location

Υ = Year

W = Work Week

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON05454G	Electronic versions are uncontrolled except when accessed directly from the Document Repositor Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.			
DESCRIPTION:	WLCSP4, 0.84X0.84X0.554		PAGE 1 OF 1		

onsemi and Onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries, onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, Onsemi, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA class 3 medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase

#### ADDITIONAL INFORMATION

**TECHNICAL PUBLICATIONS:** 

 $\textbf{Technical Library:} \ \underline{www.onsemi.com/design/resources/technical-documentation}$ 

onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at

www.onsemi.com/support/sales