

# Dual Complementary General Purpose Transistor NST3946DP6T5G

The NST3946DP6T5G device is a spin-off of our popular SOT-23/SOT-323/SOT-563 three-leaded device. It is designed for general purpose amplifier applications and is housed in the SOT-963 six-leaded surface mount package. By putting two discrete devices in one package, this device is ideal for low-power surface mount applications where board space is at a premium.

## Features

- $h_{FE}$ , 100–300
- Low  $V_{CE(sat)}$ ,  $\leq 0.4$  V
- Reduces Board Space and Component Count
- NSV Prefix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free and are RoHS Compliant

## MAXIMUM RATINGS

| Rating                         | Symbol    | Value               | Unit |
|--------------------------------|-----------|---------------------|------|
| Collector – Emitter Voltage    | $V_{CEO}$ | 40                  | Vdc  |
| Collector – Base Voltage       | $V_{CBO}$ | 60                  | Vdc  |
| Emitter – Base Voltage         | $V_{EBO}$ | 6.0                 | Vdc  |
| Collector Current – Continuous | $I_C$     | 200                 | mA   |
| Electrostatic Discharge        | HBM<br>MM | ESD<br>Class 2<br>B |      |

## THERMAL CHARACTERISTICS


| Characteristic (Single Heated)                                                                | Symbol          | Max            | Unit                       |
|-----------------------------------------------------------------------------------------------|-----------------|----------------|----------------------------|
| Total Device Dissipation $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ (Note 2) | $P_D$           | 240<br>1.9     | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction-to-Ambient (Note 2)                                              | $R_{\theta JA}$ | 520            | $^\circ\text{C/W}$         |
| Total Device Dissipation $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ (Note 3) | $P_D$           | 280<br>2.2     | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction-to-Ambient (Note 3)                                              | $R_{\theta JA}$ | 446            | $^\circ\text{C/W}$         |
| Characteristic (Dual Heated) (Note 4)                                                         | Symbol          | Max            | Unit                       |
| Total Device Dissipation $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ (Note 2) | $P_D$           | 350<br>2.8     | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction-to-Ambient (Note 2)                                              | $R_{\theta JA}$ | 357            | $^\circ\text{C/W}$         |
| Total Device Dissipation $T_A = 25^\circ\text{C}$<br>Derate above $25^\circ\text{C}$ (Note 3) | $P_D$           | 420<br>3.4     | mW<br>mW/ $^\circ\text{C}$ |
| Thermal Resistance, Junction-to-Ambient (Note 3)                                              | $R_{\theta JA}$ | 297            | $^\circ\text{C/W}$         |
| Junction and Storage Temperature Range                                                        | $T_J, T_{stg}$  | –55 to<br>+150 | $^\circ\text{C}$           |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

2. FR-4 @ 100 mm<sup>2</sup>, 1 oz. copper traces, still air


3. FR-4 @ 500 mm<sup>2</sup>, 1 oz. copper traces, still air.

4. Dual heated values assume total power is sum of two equally powered channels




NST3946DP6T5G\*

\*Q1 PNP  
Q2 NPN



SOT-963  
CASE 527AD

## MARKING DIAGRAM



L = Device Code  
(180° Clockwise Rotation)  
M = Date Code

## ORDERING INFORMATION

| Device        | Package              | Shipping†             |
|---------------|----------------------|-----------------------|
| NST3946DP6T5G | SOT-963<br>(Pb-Free) | 8000 /<br>Tape & Reel |

## DISCONTINUED (Note 1)

|                |                      |                       |
|----------------|----------------------|-----------------------|
| NSVT3946DP6T5G | SOT-963<br>(Pb-Free) | 8000 /<br>Tape & Reel |
|----------------|----------------------|-----------------------|

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

1. **DISCONTINUED:** This device is not recommended for new design. Please contact your onsemi representative for information. The most current information on this device may be available on [www.onsemi.com](http://www.onsemi.com).

# NST3946DP6T5G

## ELECTRICAL CHARACTERISTICS (T<sub>A</sub> = 25°C unless otherwise noted)

| Characteristic | Symbol | Min | Max | Unit |
|----------------|--------|-----|-----|------|
|----------------|--------|-----|-----|------|

### OFF CHARACTERISTICS

|                                                                                                                                                                                                  |                |                      |             |           |                  |
|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------|----------------------|-------------|-----------|------------------|
| Collector–Emitter Breakdown Voltage (Note 5)<br>(I <sub>C</sub> = 1.0 mA <sub>dc</sub> , I <sub>B</sub> = 0)<br>(I <sub>C</sub> = –1.0 mA <sub>dc</sub> , I <sub>B</sub> = 0)                    | (NPN)<br>(PNP) | V <sub>(BR)CEO</sub> | 40<br>–40   | –<br>–    | V <sub>dc</sub>  |
| Collector–Base Breakdown Voltage<br>(I <sub>C</sub> = 10 μA <sub>dc</sub> , I <sub>E</sub> = 0)<br>(I <sub>C</sub> = –10 μA <sub>dc</sub> , I <sub>E</sub> = 0)                                  | (NPN)<br>(PNP) | V <sub>(BR)CBO</sub> | 60<br>–40   | –<br>–    | V <sub>dc</sub>  |
| Emitter–Base Breakdown Voltage<br>(I <sub>E</sub> = 10 μA <sub>dc</sub> , I <sub>C</sub> = 0)<br>(I <sub>E</sub> = –10 μA <sub>dc</sub> , I <sub>C</sub> = 0)                                    | (NPN)<br>(PNP) | V <sub>(BR)EBO</sub> | 6.0<br>–5.0 | –<br>–    | V <sub>dc</sub>  |
| Collector Cutoff Current<br>(V <sub>CE</sub> = 30 V <sub>dc</sub> , V <sub>EB</sub> = 3.0 V <sub>dc</sub> )<br>(V <sub>CE</sub> = –30 V <sub>dc</sub> , V <sub>EB</sub> = –3.0 V <sub>dc</sub> ) | (NPN)<br>(PNP) | I <sub>CEX</sub>     | –<br>–      | 50<br>–50 | nA <sub>dc</sub> |

### ON CHARACTERISTICS (Note 5)

|                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                   |                                    |                      |                                                                |                                                        |                 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|----------------------|----------------------------------------------------------------|--------------------------------------------------------|-----------------|
| DC Current Gain<br>(I <sub>C</sub> = 0.1 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = 1.0 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = 10 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = 50 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = 100 mA <sub>dc</sub> , V <sub>CE</sub> = 1.0 V <sub>dc</sub> )<br><br>(I <sub>C</sub> = –0.1 mA <sub>dc</sub> , V <sub>CE</sub> = –1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = –1.0 mA <sub>dc</sub> , V <sub>CE</sub> = –1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = –10 mA <sub>dc</sub> , V <sub>CE</sub> = –1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = –50 mA <sub>dc</sub> , V <sub>CE</sub> = –1.0 V <sub>dc</sub> )<br>(I <sub>C</sub> = –100 mA <sub>dc</sub> , V <sub>CE</sub> = –1.0 V <sub>dc</sub> ) | (NPN)<br><br><br><br><br><br>(PNP) | h <sub>FE</sub>      | 40<br>70<br>100<br>60<br>30<br><br>60<br>80<br>100<br>60<br>30 | –<br>–<br>300<br>–<br>–<br><br>–<br>–<br>300<br>–<br>– | –               |
| Collector–Emitter Saturation Voltage<br>(I <sub>C</sub> = 10 mA <sub>dc</sub> , I <sub>B</sub> = 1.0 mA <sub>dc</sub> )<br>(I <sub>C</sub> = 50 mA <sub>dc</sub> , I <sub>B</sub> = 5.0 mA <sub>dc</sub> )<br><br>(I <sub>C</sub> = –10 mA <sub>dc</sub> , I <sub>B</sub> = –1.0 mA <sub>dc</sub> )<br>(I <sub>C</sub> = –50 mA <sub>dc</sub> , I <sub>B</sub> = –5.0 mA <sub>dc</sub> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                          | (NPN)<br><br><br>(PNP)             | V <sub>CE(sat)</sub> | –<br>–<br><br>–<br>–                                           | 0.2<br>0.3<br><br>–0.25<br>–0.4                        | V <sub>dc</sub> |
| Base–Emitter Saturation Voltage<br>(I <sub>C</sub> = 10 mA <sub>dc</sub> , I <sub>B</sub> = 1.0 mA <sub>dc</sub> )<br>(I <sub>C</sub> = 50 mA <sub>dc</sub> , I <sub>B</sub> = 5.0 mA <sub>dc</sub> )<br><br>(I <sub>C</sub> = –10 mA <sub>dc</sub> , I <sub>B</sub> = –1.0 mA <sub>dc</sub> )<br>(I <sub>C</sub> = –50 mA <sub>dc</sub> , I <sub>B</sub> = –5.0 mA <sub>dc</sub> )                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               | (NPN)<br><br><br>(PNP)             | V <sub>BE(sat)</sub> | 0.65<br>–<br><br>–0.65<br>–                                    | 0.85<br>0.95<br><br>–0.85<br>–0.95                     | V <sub>dc</sub> |

5. Pulse Test: Pulse Width ≤ 300 μs; Duty Cycle ≤ 2.0%.

# NST3946DP6T5G

## ELECTRICAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted) (Continued)

| Characteristic                                                                                                                                                                                                                                                               | Symbol    | Min        | Max         | Unit |
|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|------------|-------------|------|
| <b>SMALL-SIGNAL CHARACTERISTICS</b>                                                                                                                                                                                                                                          |           |            |             |      |
| Current-Gain-Bandwidth Product<br>( $I_C = 10\text{ mAdc}$ , $V_{CE} = 20\text{ Vdc}$ , $f = 100\text{ MHz}$ ) (NPN)<br>( $I_C = -10\text{ mAdc}$ , $V_{CE} = -20\text{ Vdc}$ , $f = 100\text{ MHz}$ ) (PNP)                                                                 | $f_T$     | 200<br>250 | –<br>–      | MHz  |
| Output Capacitance<br>( $V_{CB} = 5.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ ) (NPN)<br>( $V_{CB} = -5.0\text{ Vdc}$ , $I_E = 0$ , $f = 1.0\text{ MHz}$ ) (PNP)                                                                                                      | $C_{obo}$ | –<br>–     | 4.0<br>4.5  | pF   |
| Input Capacitance<br>( $V_{EB} = 0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ ) (NPN)<br>( $V_{EB} = -0.5\text{ Vdc}$ , $I_C = 0$ , $f = 1.0\text{ MHz}$ ) (PNP)                                                                                                       | $C_{ibo}$ | –<br>–     | 8.0<br>10.0 | pF   |
| Noise Figure<br>( $V_{CE} = 5.0\text{ Vdc}$ , $I_C = 100\text{ }\mu\text{Adc}$ , $R_S = 1.0\text{ k }\Omega$ , $f = 1.0\text{ kHz}$ ) (NPN)<br>( $V_{CE} = -5.0\text{ Vdc}$ , $I_C = -100\text{ }\mu\text{Adc}$ , $R_S = 1.0\text{ k }\Omega$ , $f = 1.0\text{ kHz}$ ) (PNP) | NF        | –<br>–     | 5.0<br>4.0  | dB   |

## SWITCHING CHARACTERISTICS

|              |                                                                                                                                      |       |        |            |    |
|--------------|--------------------------------------------------------------------------------------------------------------------------------------|-------|--------|------------|----|
| Delay Time   | ( $V_{CC} = 3.0\text{ Vdc}$ , $V_{BE} = -0.5\text{ Vdc}$ ) (NPN)<br>( $V_{CC} = -3.0\text{ Vdc}$ , $V_{BE} = 0.5\text{ Vdc}$ ) (PNP) | $t_d$ | –<br>– | 35<br>35   | ns |
| Rise Time    | ( $I_C = 10\text{ mAdc}$ , $I_{B1} = 1.0\text{ mAdc}$ ) (NPN)<br>( $I_C = -10\text{ mAdc}$ , $I_{B1} = -1.0\text{ mAdc}$ ) (PNP)     | $t_r$ | –<br>– | 35<br>35   |    |
| Storage Time | ( $V_{CC} = 3.0\text{ Vdc}$ , $I_C = 10\text{ mAdc}$ ) (NPN)<br>( $V_{CC} = -3.0\text{ Vdc}$ , $I_C = -10\text{ mAdc}$ ) (PNP)       | $t_s$ | –<br>– | 275<br>250 | ns |
| Fall Time    | ( $I_{B1} = I_{B2} = 1.0\text{ mAdc}$ ) (NPN)<br>( $I_{B1} = I_{B2} = -1.0\text{ mAdc}$ ) (PNP)                                      | $t_f$ | –<br>– | 50<br>50   |    |

## NPN TRANSISTOR

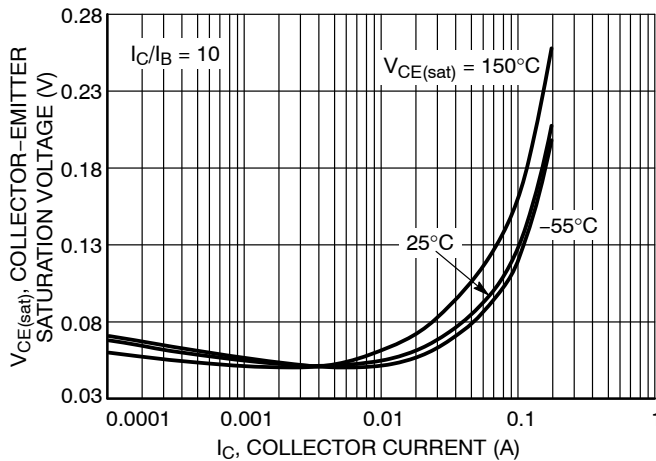


Figure 1. Collector Emitter Saturation Voltage vs. Collector Current


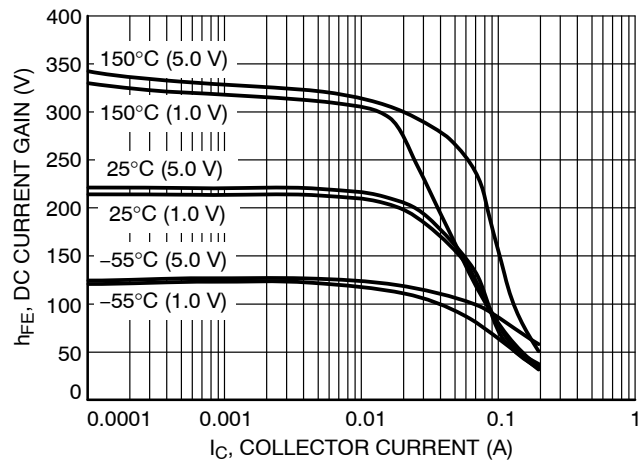



Figure 2. DC Current Gain vs. Collector Current

# NST3946DP6T5G


## NPN TRANSISTOR

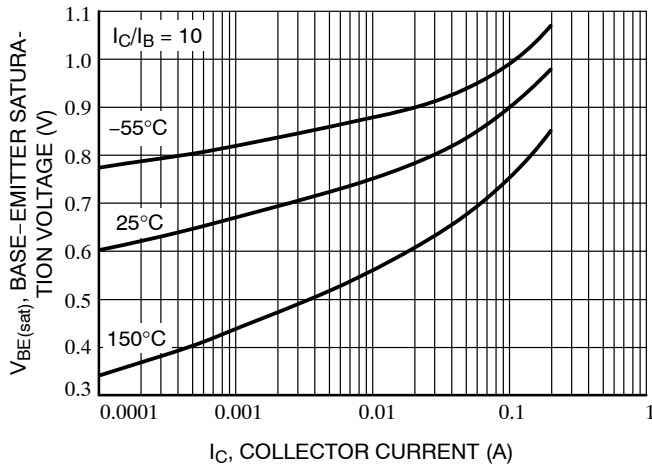


**Figure 3. Base Emitter Saturation Voltage vs. Collector Current**

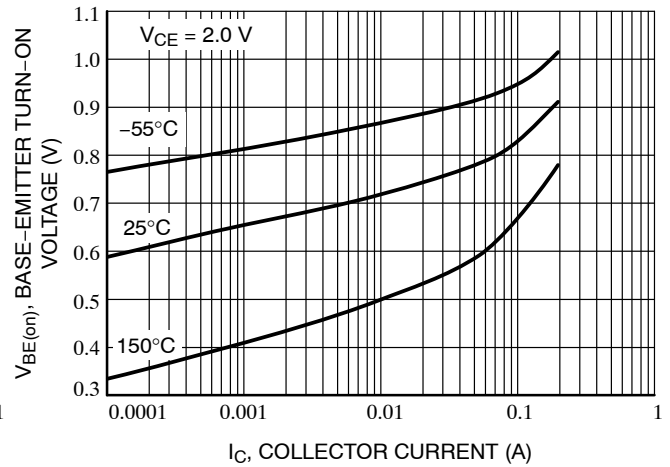


**Figure 4. Base Emitter Turn-On Voltage vs. Collector Current**

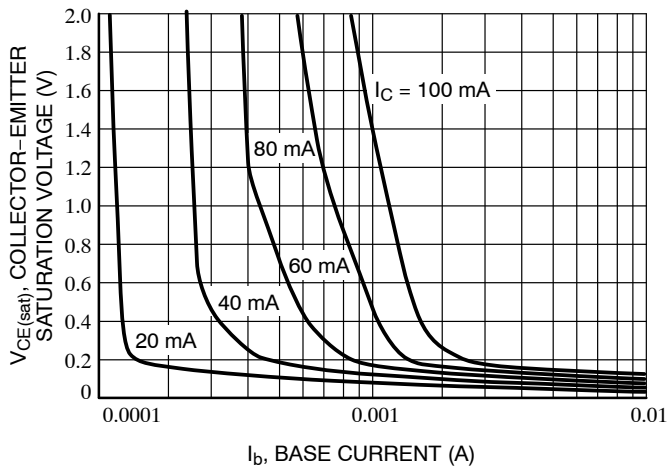

**Figure 5. Saturation Region**

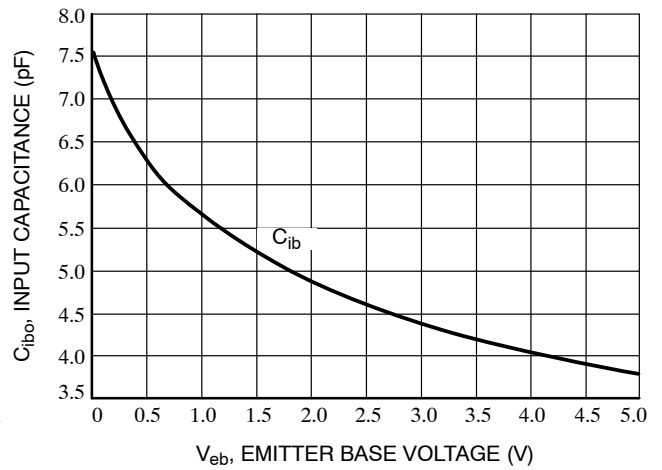


**Figure 6. Input Capacitance**

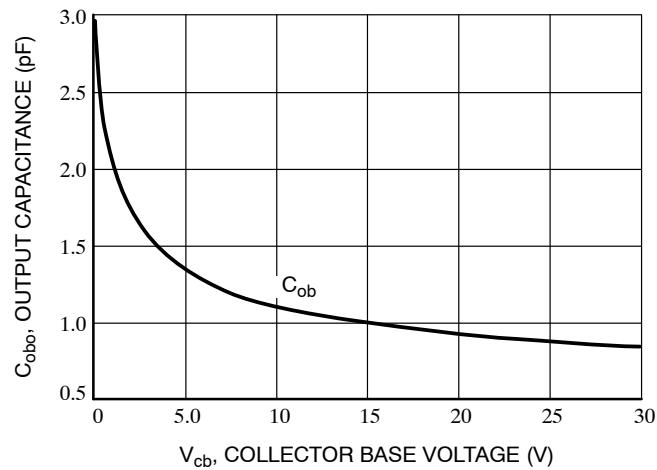


**Figure 7. Output Capacitance**

# NST3946DP6T5G

## PNP TRANSISTOR

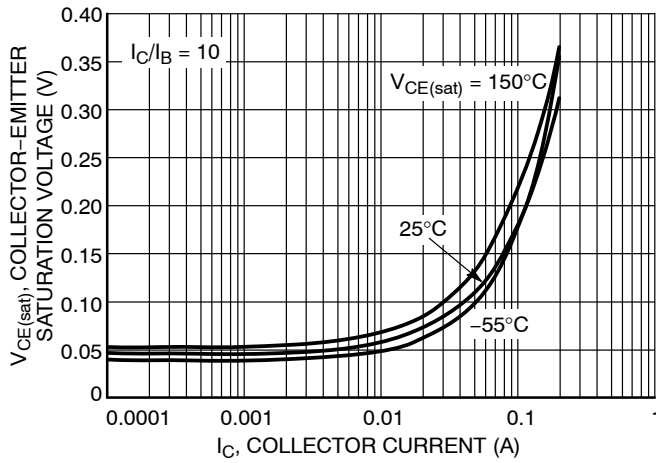


**Figure 8. Collector Emitter Saturation Voltage vs. Collector Current**

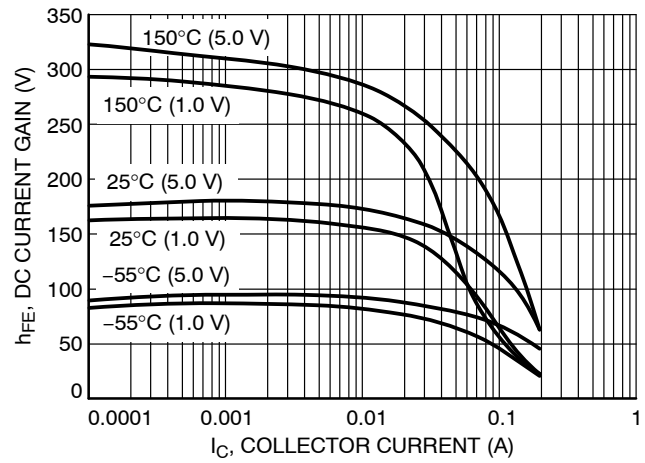


**Figure 9. DC Current Gain vs. Collector Current**

# NST3946DP6T5G


## PNP TRANSISTOR

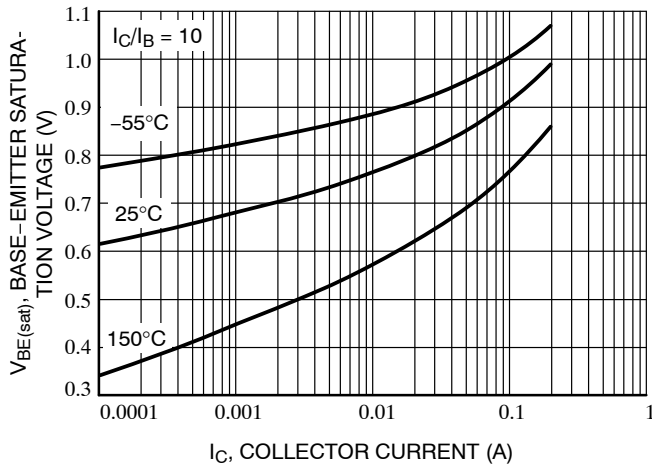


**Figure 10. Base Emitter Saturation Voltage vs. Collector Current**

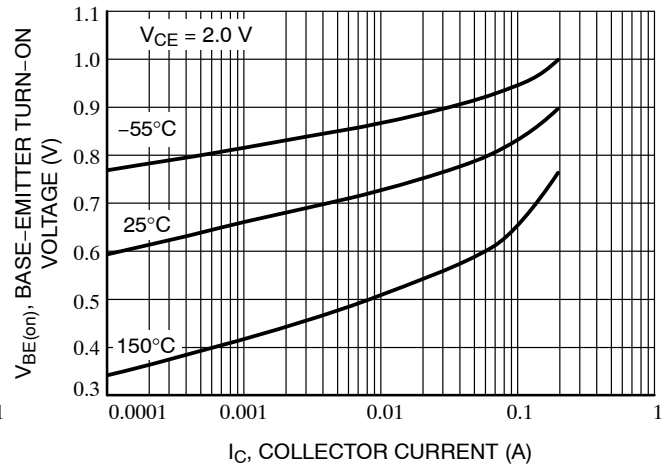


**Figure 11. Base Emitter Turn-On Voltage vs. Collector Current**

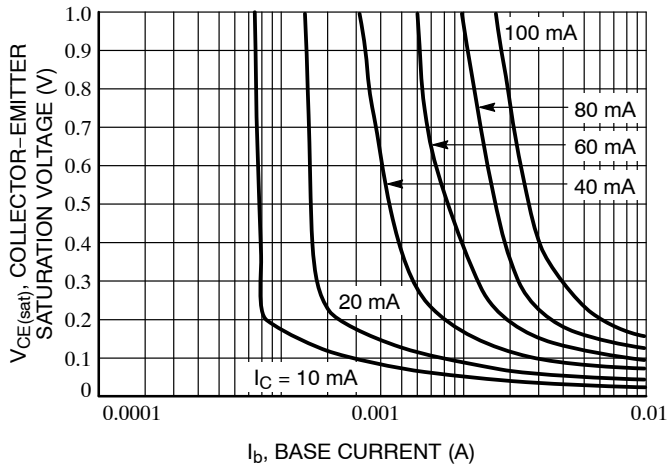


**Figure 12. Saturation Region**

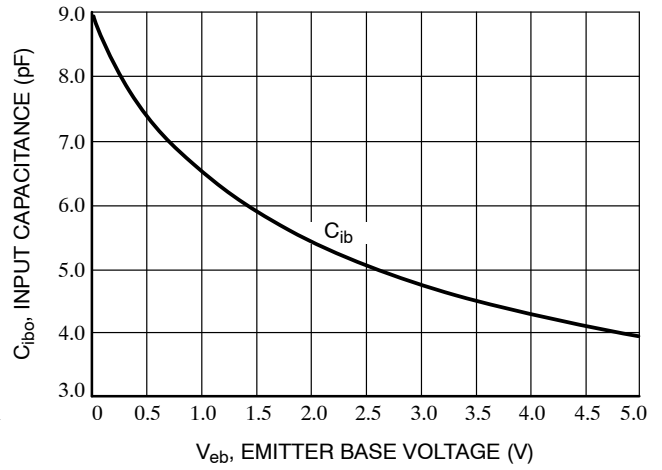

**Figure 13. Input Capacitance**

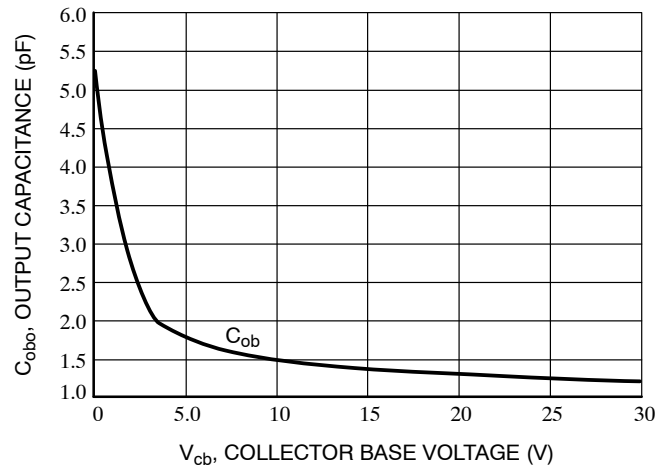

**Figure 14. Output Capacitance**




**SOT-963 1.00x1.00x0.37, 0.35P**  
**CASE 527AD**  
**ISSUE F**


DATE 20 FEB 2024

NOTES:


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH THICKNESS. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.



TOP VIEW




SIDE VIEW

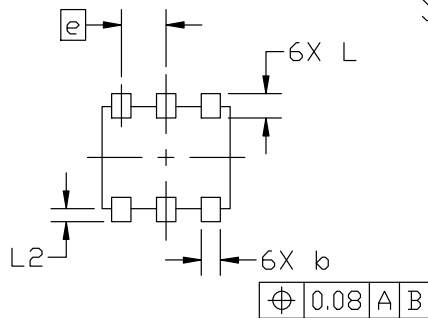

BOTTOM VIEW

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.34        | 0.37 | 0.40 |
| b   | 0.10        | 0.15 | 0.20 |
| c   | 0.07        | 0.12 | 0.17 |
| D   | 0.95        | 1.00 | 1.05 |
| E   | 0.75        | 0.80 | 0.85 |
| e   | 0.35 BSC    |      |      |
| H   | 0.95        | 1.00 | 1.05 |
| L   | 0.19 REF    |      |      |
| L2  | 0.05        | 0.10 | 0.15 |

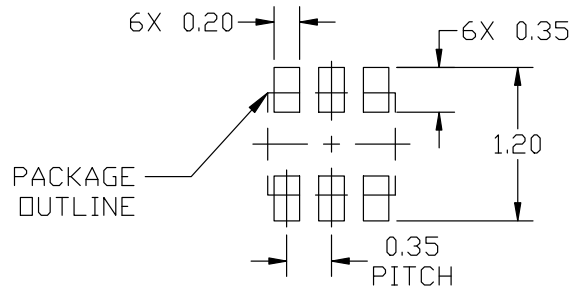

RECOMMENDED MOUNTING  
FOOTPRINT

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference manual, SOLDERRM/D.

STYLE 1:

- PIN 1. EMITTER 1  
2. BASE 1  
3. COLLECTOR 2  
4. EMITTER 2  
5. BASE 2  
6. COLLECTOR 1

STYLE 2:

- PIN 1. EMITTER 1  
2. EMITTER2  
3. BASE 2  
4. COLLECTOR 2  
5. BASE 1  
6. COLLECTOR 1

STYLE 3:

- PIN 1. CATHODE 1  
2. CATHODE 1  
3. ANODE/ANODE 2  
4. CATHODE 2  
5. CATHODE 2  
6. ANODE/ANODE 1

STYLE 4:

- PIN 1. COLLECTOR  
2. COLLECTOR  
3. BASE  
4. EMITTER  
5. COLLECTOR  
6. COLLECTOR

STYLE 5:

- PIN 1. CATHODE  
2. CATHODE  
3. ANODE  
4. ANODE  
5. CATHODE  
6. CATHODE

STYLE 6:

- PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. CATHODE  
5. CATHODE  
6. CATHODE

STYLE 7:

- PIN 1. CATHODE  
2. ANODE  
3. CATHODE  
4. CATHODE  
5. ANODE  
6. CATHODE

STYLE 8:

- PIN 1. DRAIN  
2. DRAIN  
3. GATE  
4. SOURCE  
5. DRAIN  
6. DRAIN


STYLE 9:

- PIN 1. SOURCE 1  
2. GATE 1  
3. DRAIN 2  
4. SOURCE 2  
5. GATE 2  
6. DRAIN 1

STYLE 10:

- PIN 1. CATHODE 1  
2. N/C  
3. CATHODE 2  
4. ANODE 2  
5. N/C  
6. ANODE 1

**GENERIC  
MARKING DIAGRAM\***



XX = Specific Device Code  
M = Month Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

|                         |                                      |                                                                                                                                                                                  |
|-------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON26456D</b>                   | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-963 1.00x1.00x0.37, 0.35P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)