# onsemi

## Silicon Carbide (SiC) Module – EliteSiC Power Module for Traction Inverter, Single-Side Direct Cooling, 1.7 mohm, 900 V, 6-Pack

# NVXR17S90M2SPB

#### **Product Description**

The NVXR17S90M2SPB is part of the EliteSiC power module for traction inverter, a revolutionary high mobility compound semiconductor product family that offers increased performance, better efficiency, and higher power density in similar and highly compatible packaging solutions.

The module integrates 900 V SiC MOSFET in a 6-pack configuration. For assembly ease and reliability, a new generation of press-fit pins are integrated into the power module for signal terminals. In addition, it also integrates an optimized pin-fin heatsink in the baseplate.

To enhance reliability and thermal performance, sintering technology is applied for die attach. The module is designed to meet AQG324 automotive standard.

#### Features

- Direct Cooling w/ integrated Pin-fin Heatsink
- Silicon Nitride Isolator
- T<sub>vi.Max</sub> = 175°C for Continuous Operation
- Automotive Grade SiC MOSFET Chip Technologies
- Sintered Die Technology for High Reliability Performance
- Easy to Integrate 6-pack Topology
- Automotive Module AQG324 Compliant
- These Devices are Pb-Free and are RoHS Compliant

#### **Typical Applications**


• Hybrid and Electric Vehicle Traction Inverter



SSDC39 154.40x92.0 (SPB) CASE 183AM

#### MARKING DIAGRAM

XXXXX = Specific Device Code AT = Assembly & Test Site Code YYWW= Year and Work Week Code



#### **ORDERING INFORMATION**

Device	Package	Shipping
NVXR17S90M2SPB	SSDC39 (Pb–Free)	4 Units / Tray

1

#### **Pin Description**

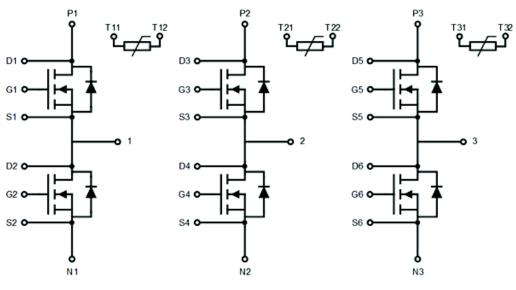


Figure 1. Pin Description

#### **PIN FUNCTION DESCRIPTION**

Pin #	Pin Function Description
P1, P2, P3	Positive Power Terminals
N1, N2, N3	Negative Power Terminals
1	Phase 1 Output
2	Phase 2 Output
3	Phase 3 Output
G1–G6	SiC MOSFET Gate
S1–S6	SiC MOSFET Source / Gate Return
D1-D6	SiC MOSFET Drain Sense
T11, T12	Phase 1 Temperature Sensor Output
T21, T22	Phase 2 Temperature Sensor Output
T31, T32	Phase 3 Temperature Sensor Output

### Materials

DBC Substrate:  $Si_3N_4$  isolated substrate, basic isolation Terminals: Copper + Tin electro-plating Signal Leads: Copper + Tin plating Pin-fin Base plate: Copper + Ni plating

## Flammability Information

The module frame meets UL94V-0 flammability rating



## **MODULE CHARACTERISTICS** ( $T_{vj}$ = 25°C, Unless Otherwise Specified)

Symbol	Parameter	Rating	Unit
Τ <sub>vj</sub>	Operating Junction Temperature	-40 to 175	°C
T <sub>STG</sub>	Storage Temperature Range	-40 to 125	°C
V <sub>ISO</sub>	Isolation Voltage (AC, 50 Hz, 5 s)	4200	V
Ls <sub>DS</sub>	Stray Inductance	8.0	nH
R <sub>DD'+SS'</sub>	Module Lead Resistance, Terminals-Chip	0.6	mΩ
G	Module Weight	700	g
CTI	Comparative Tracking Index	>200	-
d <sub>creep</sub>	Creepage: Terminal to Heatsink Terminal to Terminal	9.0 9.0	mm
d <sub>clear</sub>	Clearance: Terminal to Heatsink Terminal to Terminal	4.5 4.5	mm

Symbol	Parameters	Conditions	Min	Тур	Max	Unit
Δр	Pressure Drop in Cooling Circuit	10 L/min, 65°C, 50/50 EGW	-	95	-	mbar
P (Note 1)	Maximum Pressure in Cooling Loop (relative)	TBaseplate < 40°C TBaseplate > 40°C	-	-	2.5 2.0	bar

1. EPDM rubber 50 durometer 'O' ring used.

## **ABSOLUTE MAXIMUM RATINGS** ( $T_{vj}$ = 25°C, Unless Otherwise Specified)

Symbol	Parameter	Rating	Unit
V <sub>DS</sub>	Drain-to-Source Voltage	900	V
V <sub>GS</sub>	Gate-to-Source Voltage	+22/-8	V
I <sub>DS</sub>	Continuous DC Drain Current, V <sub>GS</sub> = 18 V, T <sub>vj</sub> = 175°C, T <sub>F</sub> = 65°C @ 10LPM, R <sub>thj_F.max</sub> (Note 2)	620	А
I <sub>DS.pulsed</sub>	Pulsed Drain Current @ $V_{GS}$ = 18 V, limited by $T_{vj.Max}$	1240	А
I <sub>SD.BD</sub>	Continuous DC Body Diode Current, $V_{GS} = -5 V$ , $T_{vj} = 175^{\circ}C$ , $T_F = 65^{\circ}C$ @10LPM, using Ref. Heatsink (Note 2)	264	А
I <sub>SD.pulsed</sub>	Pulsed Body Diode Current, $V_{GS}$ =–5 V, limited by $T_{vj.Max}$	1240	А
P <sub>tot</sub>	Total Power Dissipation $T_{vj.Max}$ = 175°C, $T_F$ = 65°C, Ref. Heatsink (typ)	1000	W

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected. 2. Verified by characterization/design, not by test.



Symbol	Parameters	Conditions		Min	Тур.	Max	Unit
R <sub>DS(ON)</sub>	Drain – Source On Resistance	V <sub>GS</sub> = 18 V, I <sub>D</sub> = 620 A	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 175°C	-	1.70 2.30	2.10 -	mΩ
I <sub>DSS</sub>	Zero Gate Voltage Drain Current	$V_{GS}$ = 0 V, $V_{DS}$ = 900 V	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 175°C	-	- 2	800 -	μA mA
I <sub>GSS</sub>	Gate – Source Leakage Current	$V_{GS}$ = 18 V, $V_{DS}$ = 0 V	-	-	-	8	μA
V <sub>GS(TH)</sub>	Threshold Voltage	$V_{GS}$ = $V_{DS}$ , $I_{D}$ = 200 mA		1.8	2.7	4.3	V
9 <sub>fs</sub>	Forward Transconductance	$V_{DS} = 20 \text{ V}, \text{ I}_{D} = 620 \text{ A}$		-	440	-	S
$Q_{G}$	Total Gate Charge	$V_{\rm GS}$ = –5/18 V, $V_{\rm DS}$ = 400 V, $I_{\rm D}$ =	620 A	-	2.4	-	μC
R <sub>g.int</sub>	Internal gate resistance			-	0.7	-	Ω
C <sub>iss</sub>	Input Capacitance	V <sub>DS</sub> = 400V, V <sub>GS</sub> = 0V, f = 100 kHz		-	45	-	nF
C <sub>oss</sub>	Output Capacitance			-	3.3	-	nF
C <sub>rss</sub>	Reverse Transfer Capacitance			-	0.3	-	nF
T <sub>d.on</sub>	Turn on delay, inductive load	$I_D = 620 \text{ A}, V_{DS} = 400 \text{ V}, V_{GS} = +18 / -5 \text{ V},$	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 175°C		122 100		ns
T <sub>r</sub>	Rise time, inductive load	- R <sub>g.on</sub> = 3.9 Ω	$\begin{array}{l} T_{vj} = 25^{\circ}C \\ T_{vj} = 175^{\circ}C \end{array}$		110 90	-	ns
T <sub>d.off</sub>	Turn off delay, inductive load	$I_D = 620 \text{ A}, V_{DS} = 400 \text{ V}, V_{GS} = +18 / -5 \text{ V},$	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 175°C		327 388	-	ns
T <sub>f</sub>	Fall time, inductive load	· R <sub>g.off</sub> = 1.8 Ω	$T_{vj} = 25^{\circ}C$ $T_{vj} = 175^{\circ}C$	-	61 65	-	ns
Eon	Turn On Switching Loss (including diode reverse recovery	$I_D$ = 620 A, $V_{DS}$ = 400 V, $V_{GS}$ = +18 / -5 V,	di/dt = 5.3 A/ns, T <sub>vj</sub> = 25°C	-	17	-	mJ
	loss)	$L_{S}$ = 18 nH, $R_{g.on}$ = 3.9 $\Omega$	di/dt = 4.7 A/ns, T <sub>vj</sub> = 175°C	-	15	-	
E <sub>off</sub>	Turn Off Switching Loss	I <sub>D</sub> = 620 A, V <sub>DS</sub> = 400 V, V <sub>GS</sub> = +18 / -5 V,	dv/dt = 6.0 V/ns T <sub>vi</sub> = 25°C	-	18	-	mJ
		$L_{\rm S}$ = 18 nH, $R_{\rm g.off}$ = 1.8 $\Omega$	dv/dt = 6.0 V/ns $T_{vj} = 175^{\circ}C$	-	19	-	
E <sub>SC</sub>	Short Circuit Energy withstand	$V_{GS}$ = 18 V, $V_{DD}$ = 400 V	T <sub>vj</sub> = 25 °C T <sub>vi</sub> = 175 °C		12 10		J

#### **MOSFET CHARACTERISTICS** (T<sub>vi</sub> = 25°C, Unless Otherwise Specified)



## BODY DIODE CHARACTERISTICS ( $T_{vj}$ = 25°C, Unless Otherwise Specified)

	Parameters	Condition	าร	Min	Тур	Max	Unit
V <sub>SD</sub>	Diode Forward Voltage	$V_{GS} = -5$ V, $I_{SD} = 264$ A	T <sub>vj</sub> = 25°C T <sub>vj</sub> = 175°C	-	4.0 3.5	-	V
E <sub>rr</sub>	Reverse Recovery Energy	$\begin{split} I_{SD} &= 620 \text{ A}, \\ V_{R} &= 400 \text{ V}, \\ V_{GS} &= -5 \text{ V}, \\ R_{g.on} &= 3.9 \Omega \end{split}$	$\begin{array}{l} \text{di/dt} = 5.3 \text{ A/ns}, \\ \text{T}_{vj} = 25^{\circ}\text{C} \\ \text{di/dt} = 4.7 \text{ A/ns}, \\ \text{T}_{vj} = 175^{\circ}\text{C} \end{array}$	-	0.4 1.3		mJ
Q <sub>rr</sub>	Recovered Charge		$\begin{array}{l} T_{vj} = 25^{\circ}C \\ T_{vj} = 175^{\circ}C \end{array}$	-	2.6 6.7		μC
l <sub>rr</sub>	Peak Reverse Recovery Current		$\begin{array}{l} T_{vj} = 25^\circ C \\ T_{vj} = 175^\circ C \end{array}$		115 215		A

## NTC SENSOR CHARACTERISTICS (Tvj = 25°C, Unless Otherwise Specified)


	Parameters	Conditions	Min	Тур	Max	Unit
R <sub>25</sub>	Rated Resistance	$T_c = 25^{\circ}C$	-	5	-	kΩ
$\Delta R/R$	Deviation of R25	$T_c = 25^{\circ}C, R25 = 5 k\Omega$	-5	-	5	%
P <sub>25</sub>	Power Dissipation	$T_c = 25^{\circ}C$	-	-	25	mW
B <sub>25/50</sub>	B-Value	$R = R_{25} \exp \left[ B_{25/50} \left( 1/T - 1/298 \right) \right]$	-	3375	-	К
B <sub>25/80</sub>	B-Value	$R = R_{25} \exp \left[ B_{25/80} \left( 1/T - 1/298 \right) \right]$	-	3411	-	К
B <sub>25/120</sub>	B-Value	$R = R_{25} \exp [B_{25/120} (1/T - 1/298)]$	-	3433	_	K

#### THERMAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	Min	Тур	Мах	Unit
$R_{th,J-F}$	FET Junction to Fluid	$R_{\text{th}},$ Junction to Fluid, 10 L/min, 65°C, 50/50 EGW	-	0.10	0.11	°C/W




## **TYPICAL CHARACTERISTICS**

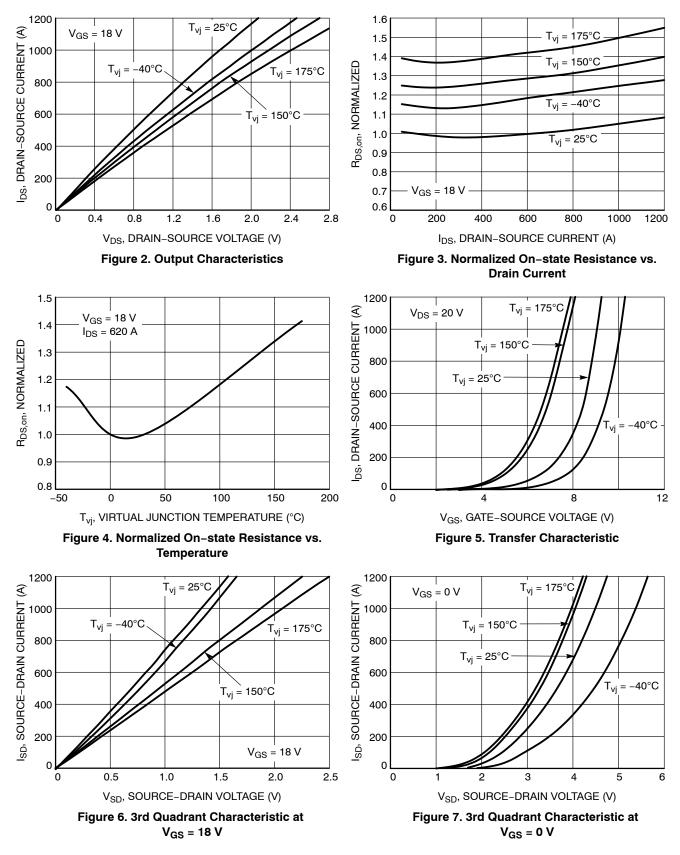




## **TYPICAL CHARACTERISTICS**

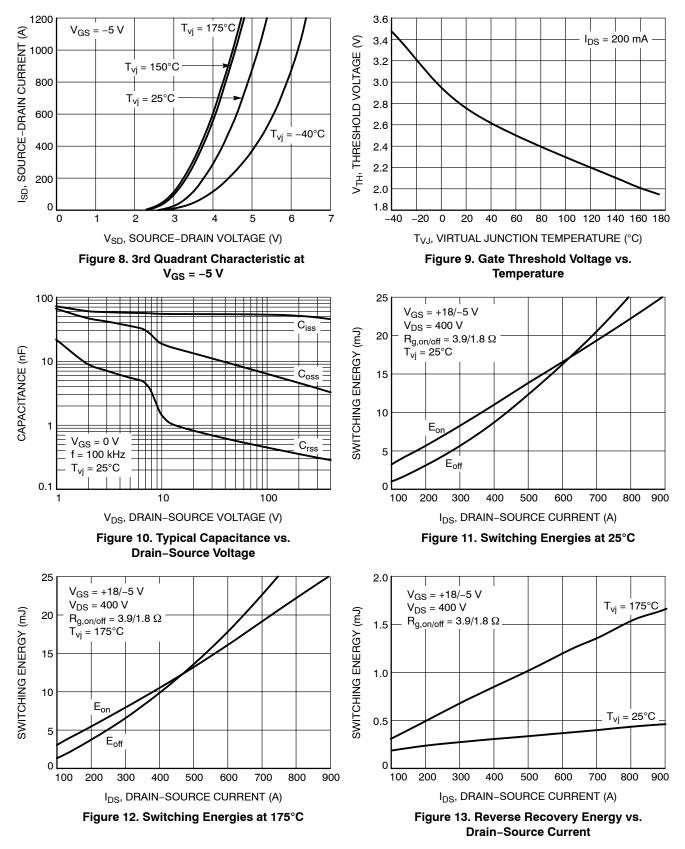




### **TYPICAL CHARACTERISTICS**

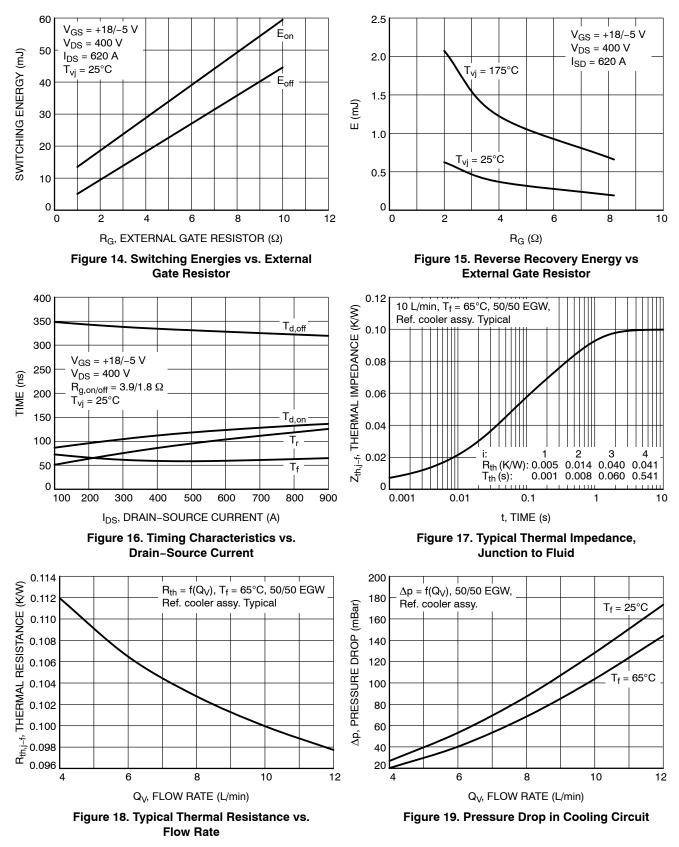





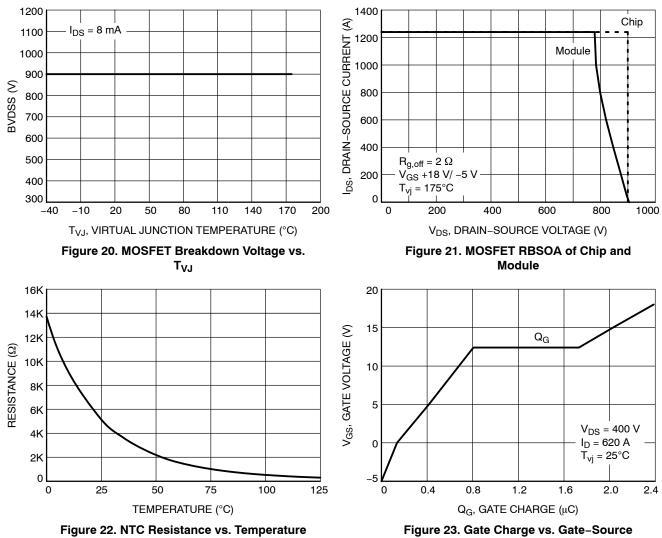

Voltage



onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <u>www.onsemi.com/site/pdf/Patent\_Marking.pdf</u>. onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or indental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification. Buyer shall indemnify and hold onsemi and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs,

#### ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation onsemi Website: www.onsemi.com

ONLINE SUPPORT: <u>www.onsemi.com/support</u> For additional information, please contact your local Sales Representative at <u>www.onsemi.com/support/sales</u>