

QORVO

SiC JFET Division

Is Now Part of


onsemi™

To learn more about onsemi™, please visit our website at
www.onsemi.com

onsemi and **onsemi** and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi** product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner. Other names and brands may be claimed as the property of others.

DATASHEET

UFB15C12E1BC3N



Part Number	Package	Marking
UFB15C12E1BC3N	E1B	UFB15C12E1BC3N



Silicon Carbide (SiC) Cascode JFET Module - EliteSiC, Full-Bridge Module, 1200 V, 70 mohm

Rev. D, January 2025

Description

This SiC FET device is based on a unique ‘cascode’ circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device’s silicon-like gate-drive characteristics allows the use of unipolar gate drives, compatible with Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the E1B module package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads, and any application requiring standard gate drive. Advanced Ag sintering die attach technology gives the module superior thermal performance.

Features

- ◆ On-resistance: $R_{DS(on)} = 70m\Omega$ (typ)
- ◆ Operating temperature: 150°C (max)
- ◆ Excellent reverse recovery: $Q_{rr} = 140nC$
- ◆ Low body diode voltage: $V_{FSD} = 1.4V$
- ◆ Low gate charge: $Q_G = 46nC$
- ◆ Threshold voltage $V_{G(th)}$: 5V (typ) allowing 0 to 15V drive
- ◆ Low intrinsic capacitance
- ◆ ESD protected: HBM class 2 and CDM class C3

Typical applications

- ◆ EV charging
- ◆ PV inverters
- ◆ Switch mode power supplies
- ◆ Power factor correction modules
- ◆ Motor drives
- ◆ Induction heating

Maximum Ratings

Parameter	Symbol	Test Conditions	Value	Units
Drain-source voltage	V_{DS}		1200	V
Gate-source voltage	V_{GS}	DC	-20 to +20	V
		AC (f > 1Hz)	-25 to +25	V
Continuous drain current ¹	I_D	$T_C = 25^\circ\text{C}$	24	A
		$T_C = 105^\circ\text{C}$	15	A
Pulsed drain current ²	I_{DM}	$T_C = 25^\circ\text{C}$	80	A
Power dissipation per switch	P_{tot}	$T_C = 25^\circ\text{C}$	96	W
Maximum junction temperature	$T_{J,max}$		150	$^\circ\text{C}$
Operating and storage temperature	T_J, T_{STG}		-55 to 150	$^\circ\text{C}$

1. Limited by $T_{J,max}$

2. Pulse width t_p limited by $T_{J,max}$

Thermal Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Thermal resistance, junction-to-case per switch	$R_{\theta JC}$			1.0	1.3	$^\circ\text{C/W}$

NTC Thermistor Characteristics

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Rated resistance	R_{25}	$T_{NTC} = 25^\circ\text{C}$		5		k Ω
Resistance value tolerance	$\Delta R/R$	$T_{NTC} = 25^\circ\text{C}$	-5		5	%
Power dissipation	P_{25}	$T_{NTC} = 25^\circ\text{C}$			20	mW
B constant	$B_{25/50}$	$R_2 = R_{25} \exp [B_{25/50} (1/T_2 - 1/(298.15 \text{ K}))]$		3375		K

Module

Parameter	Symbol	Test Conditions	Value	Units
Isolation voltage	V_{ISOL}	RMS, f = 50 Hz, t = 1 min	3	kV
Internal isolation			Al_2O_3	
Creepage distance		Terminal to heatsink	12.7	mm
		Terminal to terminal	6.3	
Clearance distance		Terminal to heatsink	10	mm
		Terminal to terminal	5	
Stray inductance module	L_{SCE}		11	nH

SiC FET Electrical Characteristics ($T_J = +25^\circ\text{C}$ unless otherwise specified)

Typical Performance - Static

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Drain-source breakdown voltage	BV_{DS}	$V_{GS}=0V, I_D=1mA$	1200			V
Total drain leakage current	I_{DSS}	$V_{DS}=1200V,$ $V_{GS}=0V, T_J=25^\circ\text{C}$		0.5	75	μA
		$V_{DS}=1200V,$ $V_{GS}=0V, T_J=150^\circ\text{C}$		2.5		
Total gate leakage current	I_{GSS}	$V_{DS}=0V, T_J=25^\circ\text{C},$ $V_{GS}=-20V / +20V$		6	20	μA
Drain-source on-resistance	$R_{DS(on)}$	$V_{GS}=12V, I_D=15A,$ $T_J=25^\circ\text{C}$		70	90	m Ω
		$V_{GS}=12V, I_D=15A,$ $T_J=125^\circ\text{C}$		111		
		$V_{GS}=12V, I_D=15A,$ $T_J=150^\circ\text{C}$		129		
Gate threshold voltage	$V_{G(th)}$	$V_{DS}=5V, I_D=10mA$	4	5	6	V
Gate resistance	R_G	$f=1\text{MHz}, \text{open drain}$		4.5		Ω

Typical Performance - Reverse Diode

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Diode continuous forward current ¹	I_S	$T_C=25^\circ\text{C}$			24	A
Diode pulse current ²	$I_{S,pulse}$	$T_C=25^\circ\text{C}$			80	A
Forward voltage	V_{FSD}	$V_{GS}=0V, I_S=10A,$ $T_J=25^\circ\text{C}$		1.4	2	V
		$V_{GS}=0V, I_S=10A,$ $T_J=150^\circ\text{C}$		1.63		
Reverse recovery charge	Q_{rr}	$V_{DS}=800V, I_S=15A,$ $V_{GS}=0V, R_G=5\Omega,$ $di/dt=1200A/\mu\text{s},$ $T_J=25^\circ\text{C}$		140		nC
Reverse recovery time	t_{rr}	$V_{DS}=800V, I_S=15A,$ $V_{GS}=0V, R_G=5\Omega,$ $di/dt=1200A/\mu\text{s},$ $T_J=25^\circ\text{C}$		35		ns
Reverse recovery charge	Q_{rr}	$V_{DS}=800V, I_S=15A,$ $V_{GS}=0V, R_G=5\Omega,$ $di/dt=1200A/\mu\text{s},$ $T_J=150^\circ\text{C}$		141		nC
Reverse recovery time	t_{rr}	$V_{DS}=800V, I_S=15A,$ $V_{GS}=0V, R_G=5\Omega,$ $di/dt=1200A/\mu\text{s},$ $T_J=150^\circ\text{C}$		35		ns

Typical Performance - Dynamic

Parameter	Symbol	Test Conditions	Value			Units
			Min	Typ	Max	
Input capacitance	C_{iss}	$V_{DS}=800V, V_{GS}=0V$ $f=100kHz$		1445		pF
Output capacitance	C_{oss}			55		
Reverse transfer capacitance	C_{rss}			2		
Effective output capacitance, energy related	$C_{oss(er)}$	$V_{DS}=0V$ to 800V, $V_{GS}=0V$		63		pF
Effective output capacitance, time related	$C_{oss(tr)}$	$V_{DS}=0V$ to 800V, $V_{GS}=0V$		128		pF
C_{oss} stored energy	E_{oss}	$V_{DS}=800V, V_{GS}=0V$		20		μJ
Total gate charge	Q_G	$V_{DS}=800V, I_D=15A,$ $V_{GS} = -5V$ to 15V		46		nC
Gate-drain charge	Q_{GD}			7		
Gate-source charge	Q_{GS}			19		
Turn-on delay time	$t_{d(on)}$	Notes 3 and 4		22.4		ns
Rise time	t_r	$V_{DS}=800V, I_D=15A,$ Gate Driver = -5V to +15V, $R_{G,ON}=1\Omega, R_{G,OFF}=20\Omega,$ inductive Load,		18.4		
Turn-off delay time	$t_{d(off)}$			65		
Fall time	t_f			10.4		
Turn-on energy	E_{ON}		FWD: same device with		396	
Turn-off energy	E_{OFF}	$V_{GS} = 0V$ and $R_G = 20\Omega,$		42		
Total switching energy	E_{TOTAL}	$T_J=25^\circ C$		438		
Turn-on delay time	$t_{d(on)}$	Notes 3 and 4		22		ns
Rise time	t_r	$V_{DS}=800V, I_D=15A,$ Gate Driver = -5V to +15V, $R_{G,ON}=1\Omega, R_{G,OFF}=20\Omega,$ inductive Load, FWD: same device with $V_{GS} = 0V$ and $R_G = 20\Omega,$		16		
Turn-off delay time	$t_{d(off)}$			67		
Fall time	t_f			12		
Turn-on energy	E_{ON}		$T_J=150^\circ C$		381	
Turn-off energy	E_{OFF}			41		
Total switching energy	E_{TOTAL}			422		

3. Measured with the half-bridge mode switching test circuit in Figure 23.

4. A bus RC snubber ($R_{BS} = 2.5\Omega, C_{BS}=200nF$) must be applied to reduce the power loop high frequency oscillations.

Typical Performance - Dynamic (continued)

Parameter	Symbol	Test Conditions	Value			Units	
			Min	Typ	Max		
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6, $V_{DS}=800V$, $I_D=15A$, Gate Driver = -5V to +15V, $R_{G_ON} = 1\Omega$, $R_{G_OFF}=1\Omega$, inductive Load, FWD: same device with $V_{GS} = 0V$ and $R_G = 1\Omega$, RC snubber: $R_S=5\Omega$ and $C_S=68pF$, $T_J=25^\circ C$		44		ns	
Rise time	t_r			20			
Turn-off delay time	$t_{d(off)}$			32			
Fall time	t_f			17.6			
Turn-on energy including R_S energy	E_{ON}				474		μJ
Turn-off energy including R_S energy	E_{OFF}				62		
Total switching energy	E_{TOTAL}				536		
Snubber R_S energy during turn-on	E_{RS_ON}				1		
Snubber R_S energy during turn-off	E_{RS_OFF}				0.7		
Turn-on delay time	$t_{d(on)}$	Notes 5 and 6, $V_{DS}=800V$, $I_D=15A$, Gate Driver = -5V to +15V, $R_{G_ON} = 1\Omega$, $R_{G_OFF}=1\Omega$, inductive Load, FWD: same device with $V_{GS} = 0V$ and $R_G = 1\Omega$, RC snubber: $R_S=5\Omega$ and $C_S=68pF$, $T_J=150^\circ C$		42.4		ns	
Rise time	t_r			19.2			
Turn-off delay time	$t_{d(off)}$			32.8			
Fall time	t_f			18.4			
Turn-on energy including R_S energy	E_{ON}				450		μJ
Turn-off energy including R_S energy	E_{OFF}				64		
Total switching energy	E_{TOTAL}				514		
Snubber R_S energy during turn-on	E_{RS_ON}				0.9		
Snubber R_S energy during turn-off	E_{RS_OFF}				0.9		

5. Measured with the half-bridge mode switching test circuit in Figure 24.

6. In this table, the switching energies (turn-on energy, turn-off energy and total energy) presented include the device RC snubber energy losses.

SiC FET Typical Performance Diagrams

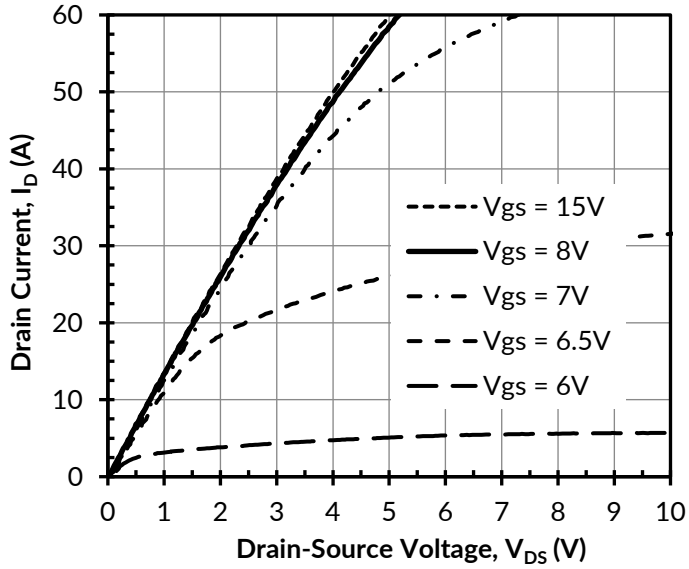


Figure 1. Typical output characteristics at $T_j = -55^\circ\text{C}$, $t_p < 250\mu\text{s}$

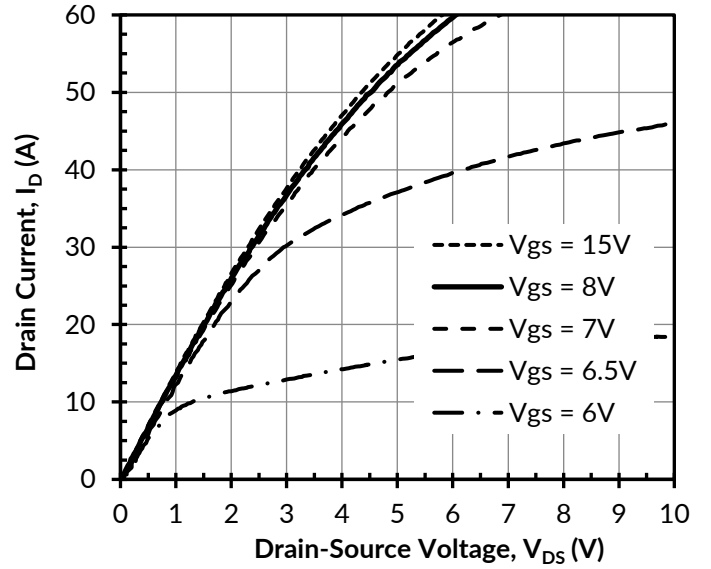


Figure 2. Typical output characteristics at $T_j = 25^\circ\text{C}$, $t_p < 250\mu\text{s}$

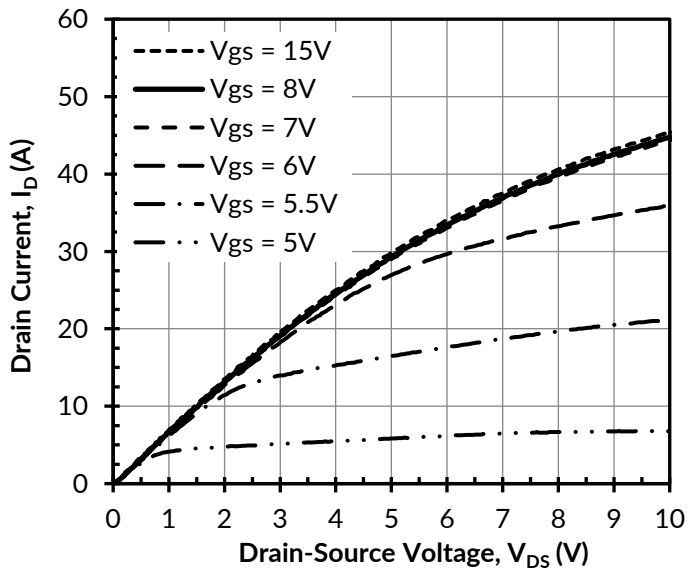


Figure 3. Typical output characteristics at $T_j = 150^\circ\text{C}$, $t_p < 250\mu\text{s}$

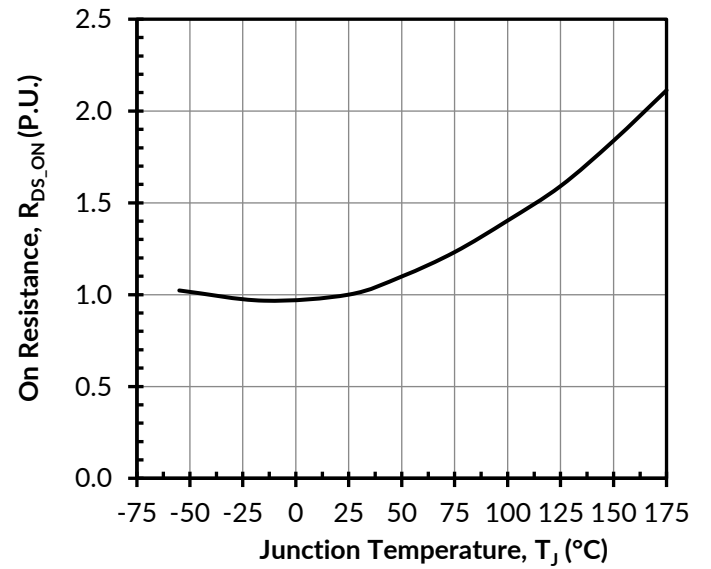


Figure 4. Normalized on-resistance vs. temperature at $V_{GS} = 12\text{V}$ and $I_D = 20\text{A}$

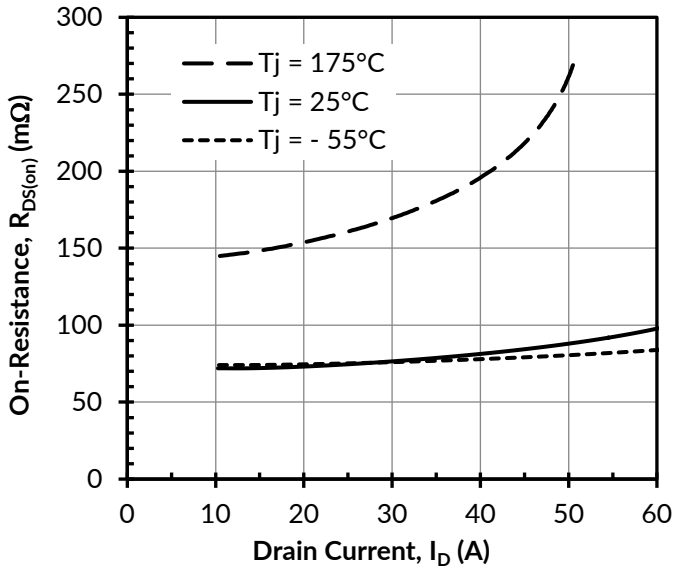


Figure 5. Typical drain-source on-resistances at $V_{GS} = 12V$

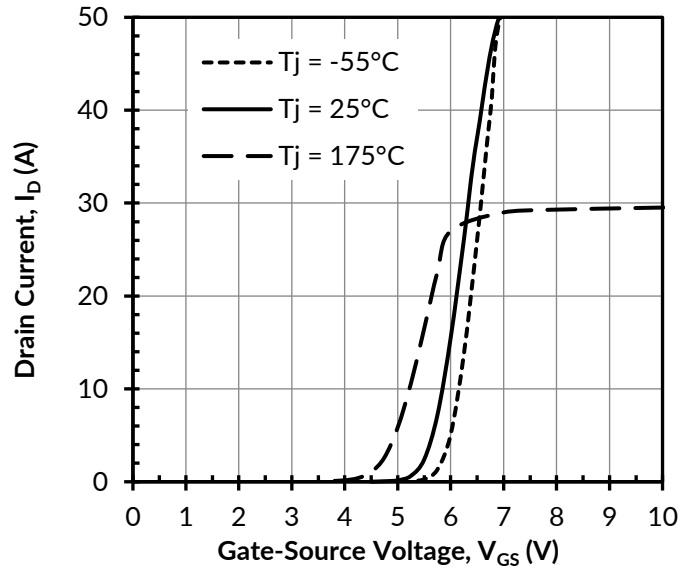


Figure 6. Typical transfer characteristics at $V_{DS} = 5V$

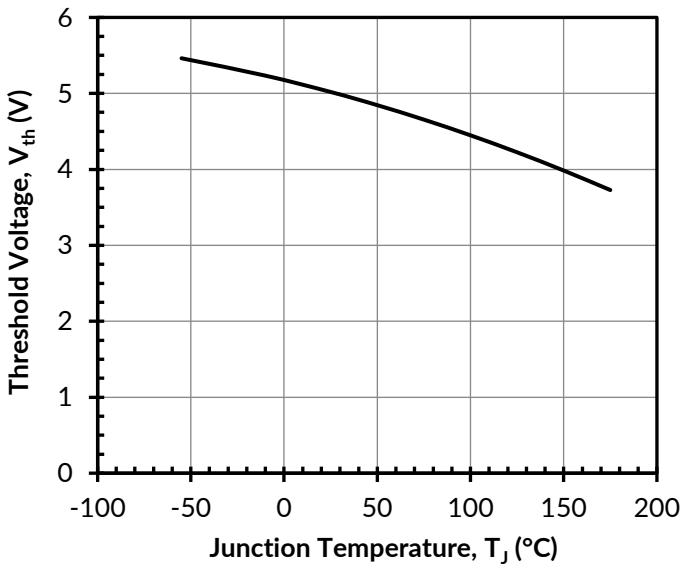


Figure 7. Threshold voltage vs. junction temperature at $V_{DS} = 5V$ and $I_D = 10mA$

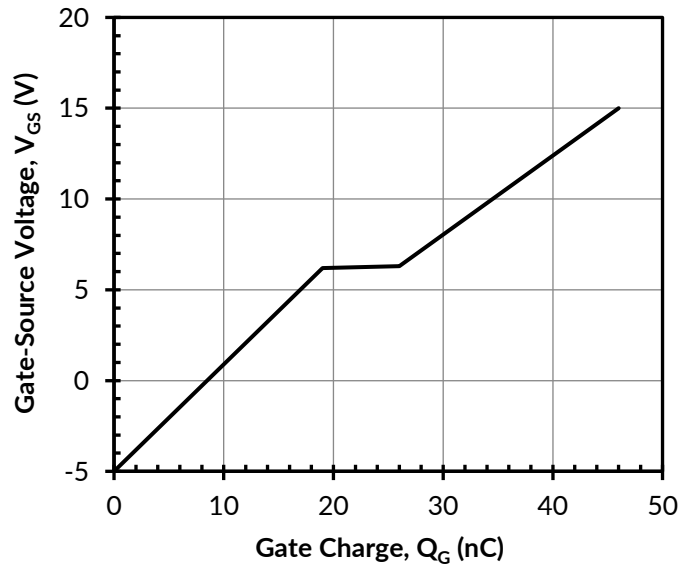


Figure 8. Typical gate charge at $V_{DS} = 800V$ and $I_D = 15A$

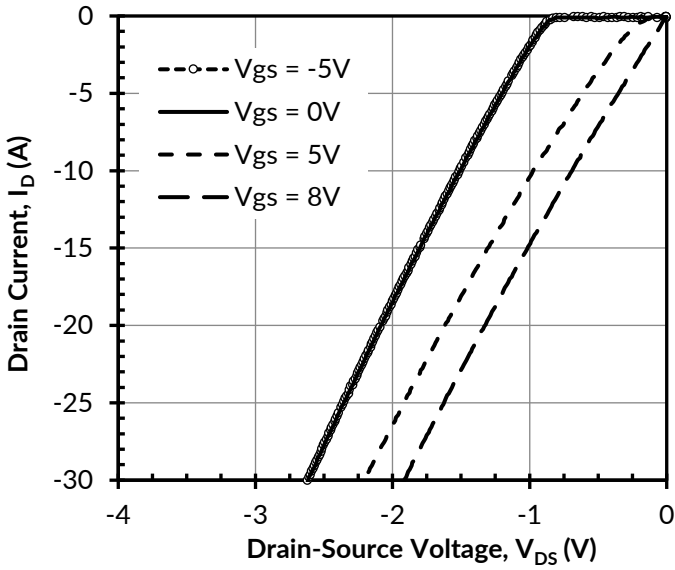


Figure 9. 3rd quadrant characteristics at $T_J = -55^\circ\text{C}$

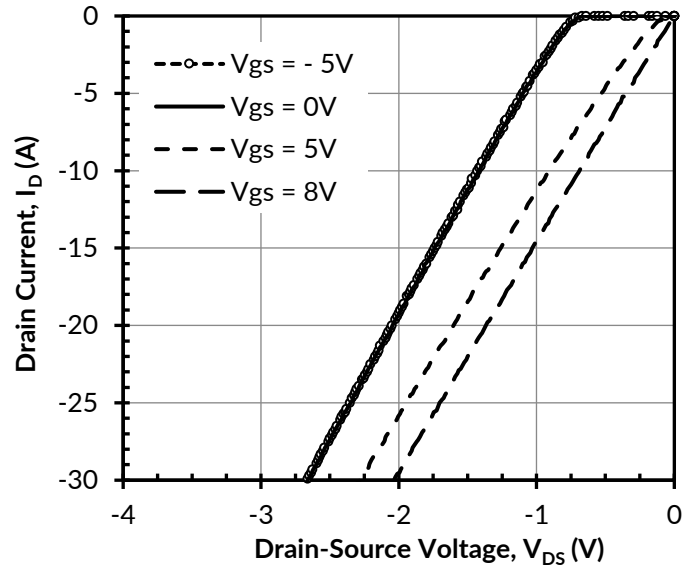


Figure 10. 3rd quadrant characteristics at $T_J = 25^\circ\text{C}$

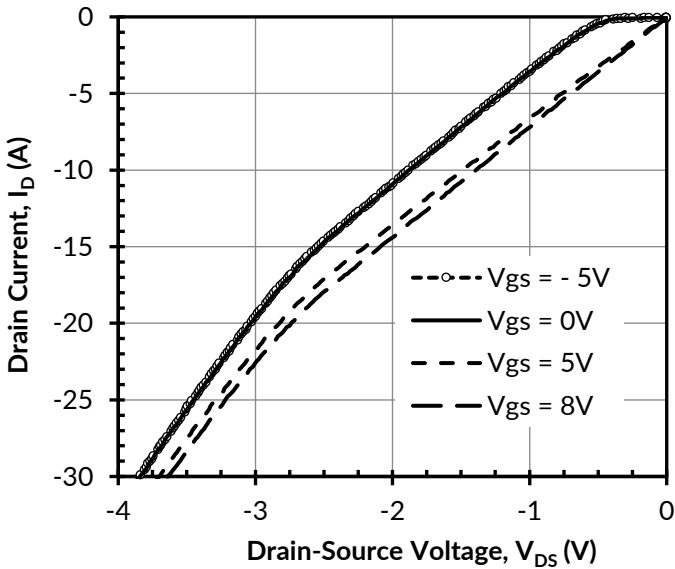


Figure 11. 3rd quadrant characteristics at $T_J = 150^\circ\text{C}$

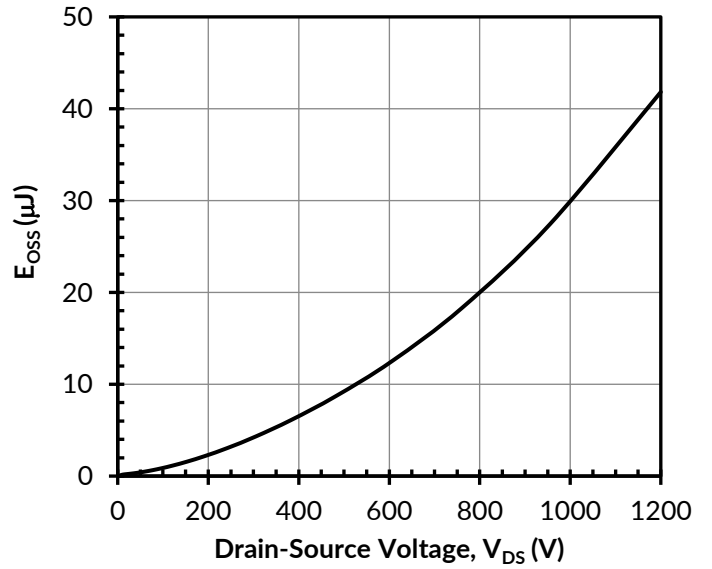


Figure 12. Typical stored energy in C_{OSS} at $V_{GS} = 0\text{V}$

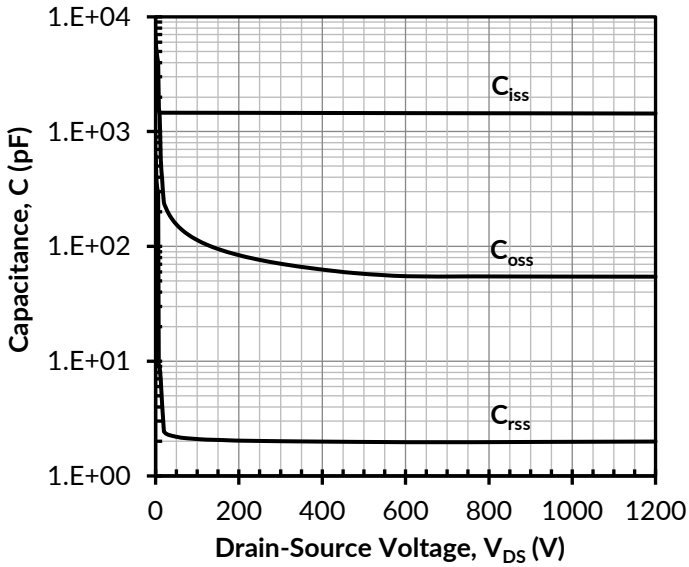


Figure 13. Typical capacitances at $f = 100\text{kHz}$ and $V_{GS} = 0\text{V}$

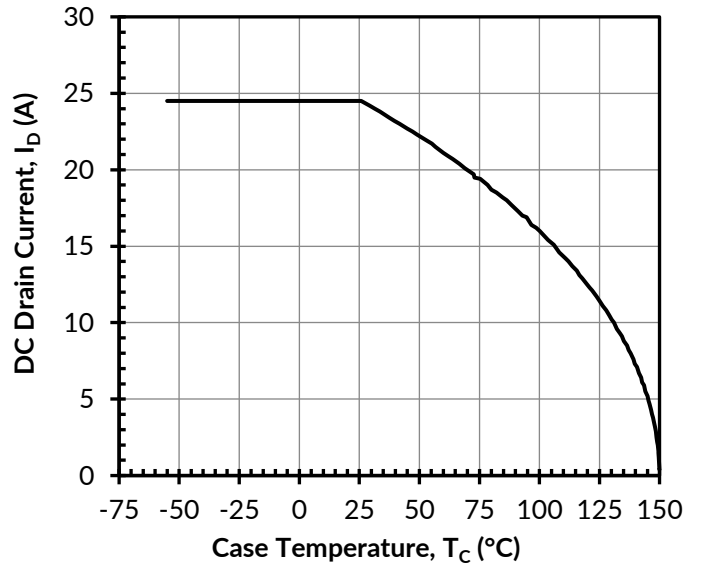


Figure 14. DC drain current derating

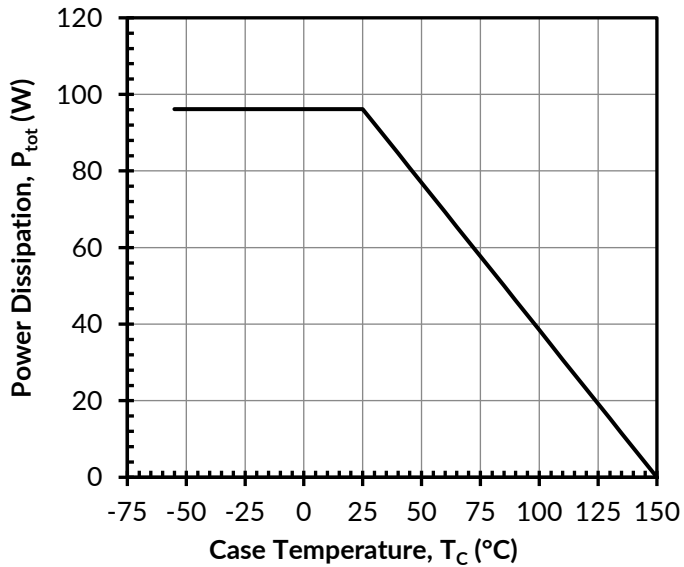


Figure 15. Total power dissipation

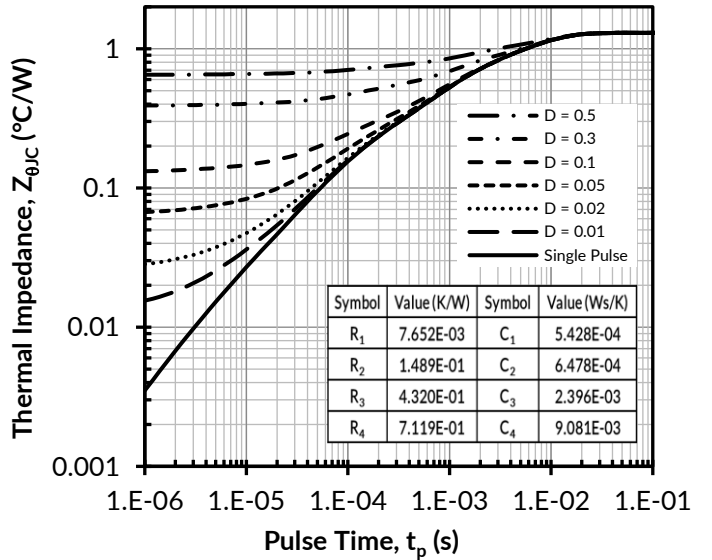


Figure 16. Maximum transient thermal impedance and parameters for thermal equivalent circuit (Foster) model

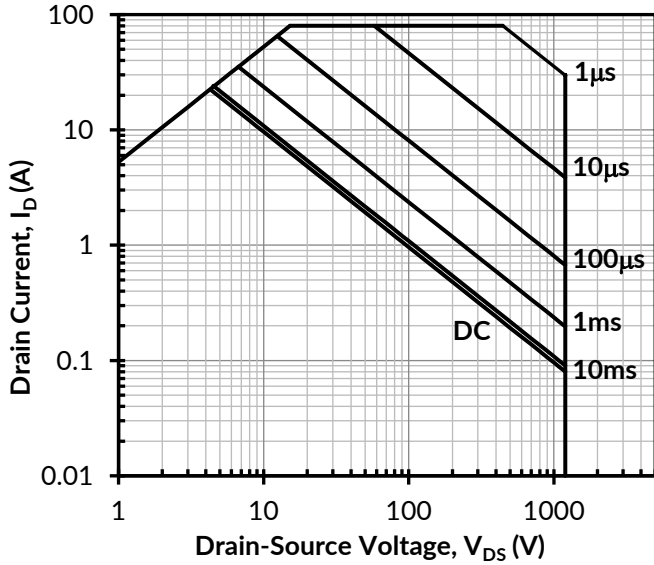


Figure 17. Safe operation area at $T_C = 25^\circ\text{C}$, $D = 0$, Parameter t_p

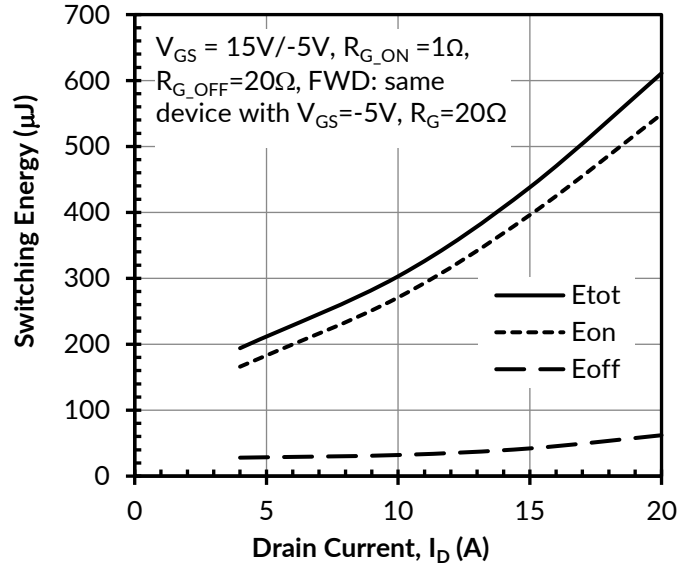


Figure 18. Clamped inductive switching energy vs. drain current at $V_{DS} = 800\text{V}$ and $T_J = 25^\circ\text{C}$

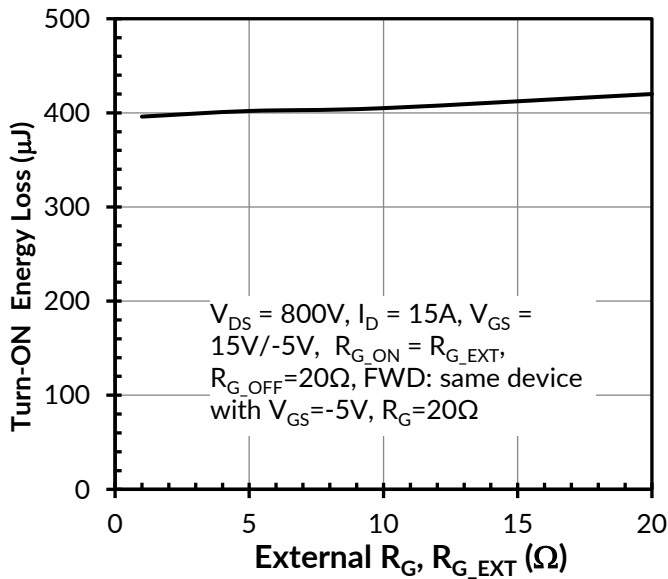


Figure 19. Clamped inductive switching turn-on energy vs. turn-on gate resistance R_G

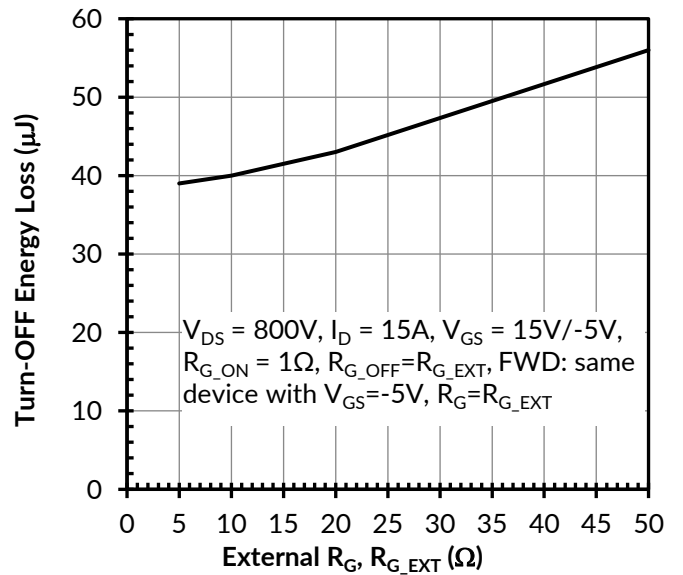


Figure 20. Clamped inductive switching turn-off energy vs. turn-off gate resistance R_G

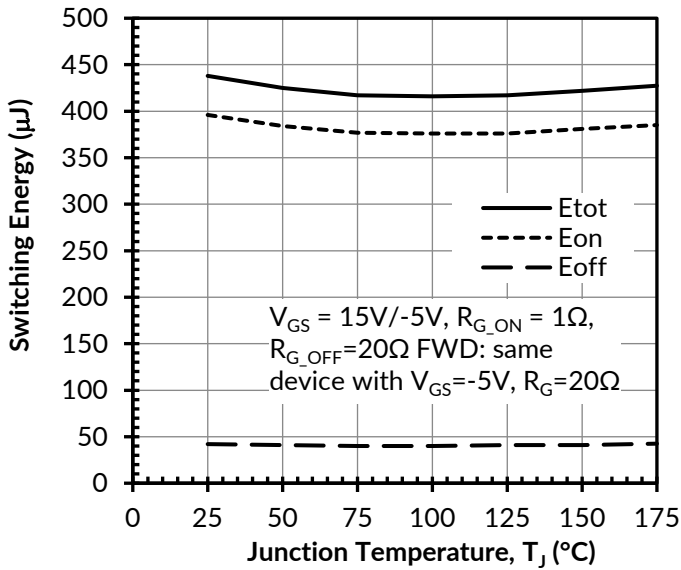


Figure 21. Clamped inductive switching energy vs. junction temperature at $V_{DS} = 800V$ and $I_D = 15A$

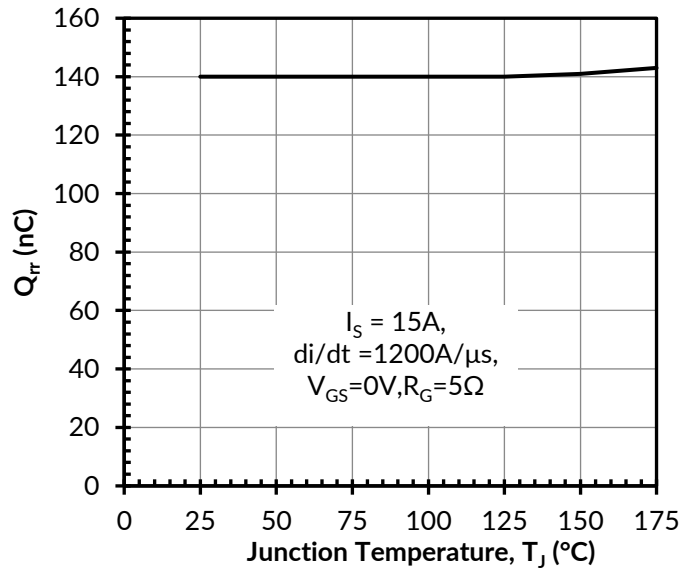


Figure 22. Reverse recovery charge Q_{rr} vs. junction temperature at $V_{DS} = 800V$

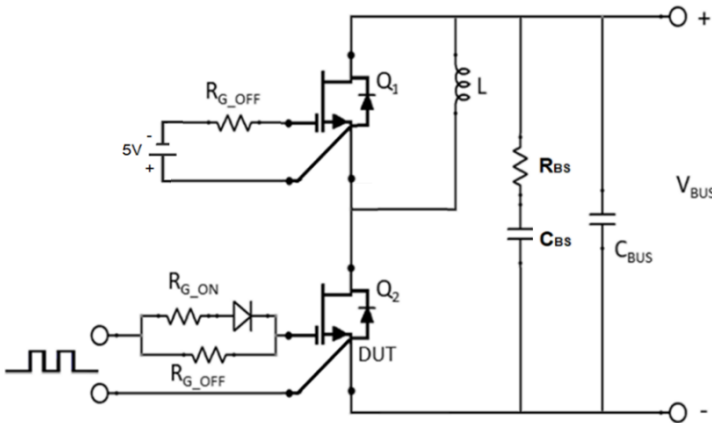


Figure 23. Schematic of the half-bridge mode switching test circuit. Note, a bus RC snubber ($R_{BS} = 2.5\Omega$, $C_{BS}=200nF$) must be applied to reduce the power loop high frequency oscillations.






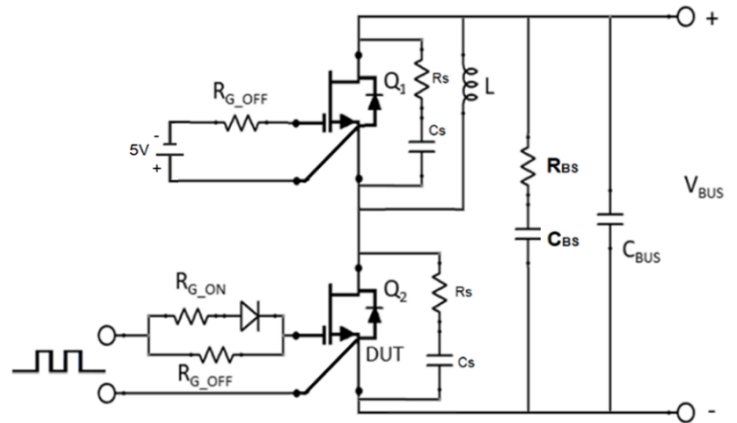


Figure 24. Schematic of the half-bridge mode switching test circuit with device RC snubbers ($R_s = 5\Omega$, $C_s = 68pF$) and a bus RC snubber ($R_{BS} = 2.5\Omega$, $C_{BS}=200nF$).

Circuit Diagram and Pin Definitions

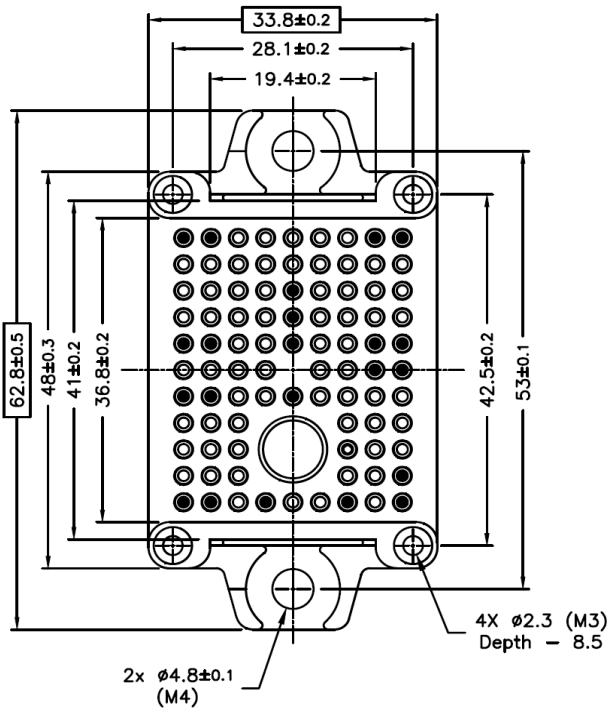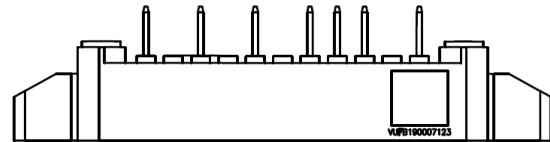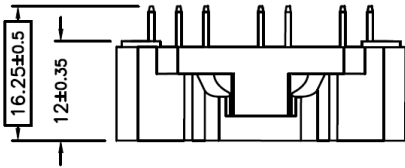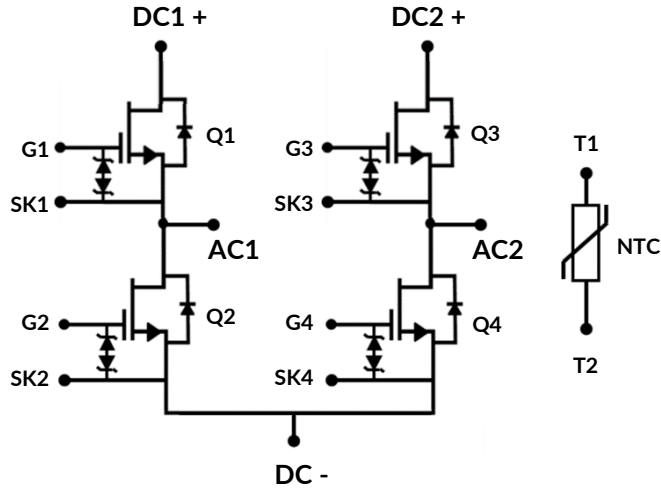

PCB HOLE PATTERN

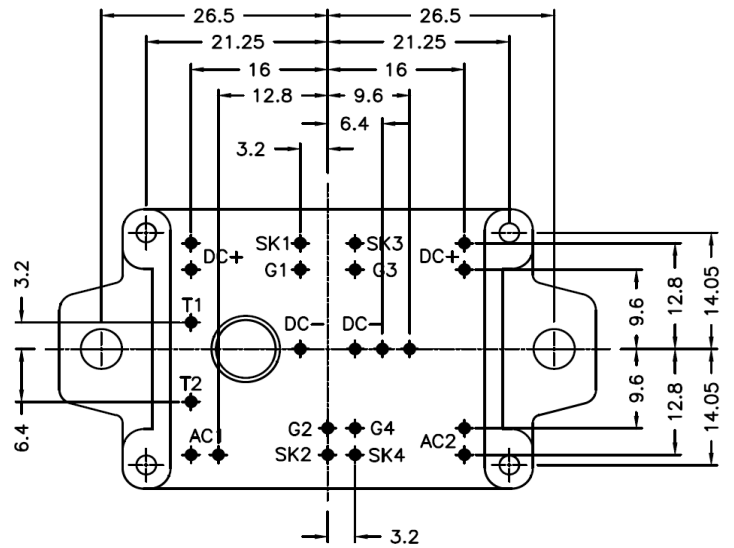

NOTES:

1. All dimensions in millimeters (mm)
2. General tolerance: ± 0.1 mm, unless otherwise specified

Important Mounting Information

This product is recommended for use with solder pin attach and phase change thermal interface materials, and not recommended for implementations using press fit and application of thermal grease. Please refer to mounting guidelines and user guide documents associated with this product for detailed information.

Applications Information

SiC FETs are enhancement-mode power switches formed by a high-voltage SiC depletion-mode JFET and a low-voltage silicon MOSFET connected in series. The silicon MOSFET serves as the control unit while the SiC JFET provides high voltage blocking in the off state. This combination of devices in a single package provides compatibility with standard gate drivers and offers superior performance in terms of low on-resistance ($R_{DS(on)}$), output capacitance (C_{oss}), gate charge (Q_G), and reverse recovery charge (Q_{rr}) leading to low conduction and switching losses. The SiC FETs also provide excellent reverse conduction capability eliminating the need for an external anti-parallel diode.

Like other high performance power switches, proper PCB layout design to minimize circuit parasitics is strongly recommended due to the high dv/dt and di/dt rates. An external gate resistor is recommended when the FET is working in the diode mode in order to achieve the optimum reverse recovery performance. For more information on SiC FET operation, see <https://www.qorvo.com/innovation/power-solutions/sic-power/sic-fet-design-tips>.

A snubber circuit with a small $R_{(G)}$, or gate resistor, provides better EMI suppression with higher efficiency compared to using a high $R_{(G)}$ value. There is no extra gate delay time when using the snubber circuitry, and a small $R_{(G)}$ will better control both the turn-off $V_{(DS)}$ peak spike and ringing duration, while a high $R_{(G)}$ will damp the peak spike but result in a longer delay time. In addition, the total switching loss when using a snubber circuit is less than using high $R_{(G)}$, while greatly reducing $E_{(OFF)}$ from mid-to-full load range with only a small increase in $E_{(ON)}$. Efficiency will therefore improve with higher load current. For more information on how a snubber circuit will improve overall system performance, visit the Qorvo website at <https://www.qorvo.com/innovation/power-solutions/sic-power/sic-fet-design-tips>.

Important notice

The information contained herein is believed to be reliable; however, Qorvo makes no warranties regarding the information contained herein and assumes no responsibility or liability whatsoever for the use of the information contained herein. All information contained herein is subject to change without notice. Customers should obtain and verify the latest relevant information before placing orders for Qorvo products. The information contained herein or any use of such information does not grant, explicitly or implicitly, to any party any patent rights, licenses, or any other intellectual property rights, whether with regard to such information itself or anything described by such information. THIS INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo products are not warranted or authorized for use as critical components in medical, life-saving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death.

E1B PACKAGE OUTLINE, PART MARKING and TRAY SPECIFICATION

Table of Contents

Introduction	2
Module Package Description	2
Package Outline Drawing Half Bridge Module.....	2
Package Outline Drawing Full Bridge Module.....	3
Branding Diagram.....	4
Tray	5
Storage Handling	5
Storage and Handling Condition.....	5
ESD.....	5
Contact Information and Important Notice	6

Introduction

This Manufacturing Note is intended for manufacturing engineers who are currently using the module for prototype or production manufacturing. The information provided in this document is meant to assist customers with the set-up and characterization of their products.


Module Package Description

This module is a SiC FET device based on a unique cascode circuit configuration, in which a normally-on SiC JFET is co-packaged with a Si MOSFET to produce a normally-off SiC FET device. The device's silicon-like gate-drive characteristics allows the use of unipolar gate drives, compatible with Si IGBTs, Si FETs, SiC MOSFETs or Si superjunction devices. Available in the E1B module package, this device exhibits ultra-low gate charge and exceptional reverse recovery characteristics, making it ideal for switching inductive loads, and any application requiring standard gate drive Package Outline Drawing.

Package Outline Drawing

This product is recommended for use with solder pin attach and phase change thermal interface materials, and not recommended for implementations using press fit and application of thermal grease. Please refer to mounting guidelines and user guide documents associated with this product for detailed information.

Package outline for Half Bridge modules: UHB100SC12E1BC3N & UHB50SC12E1BC3N

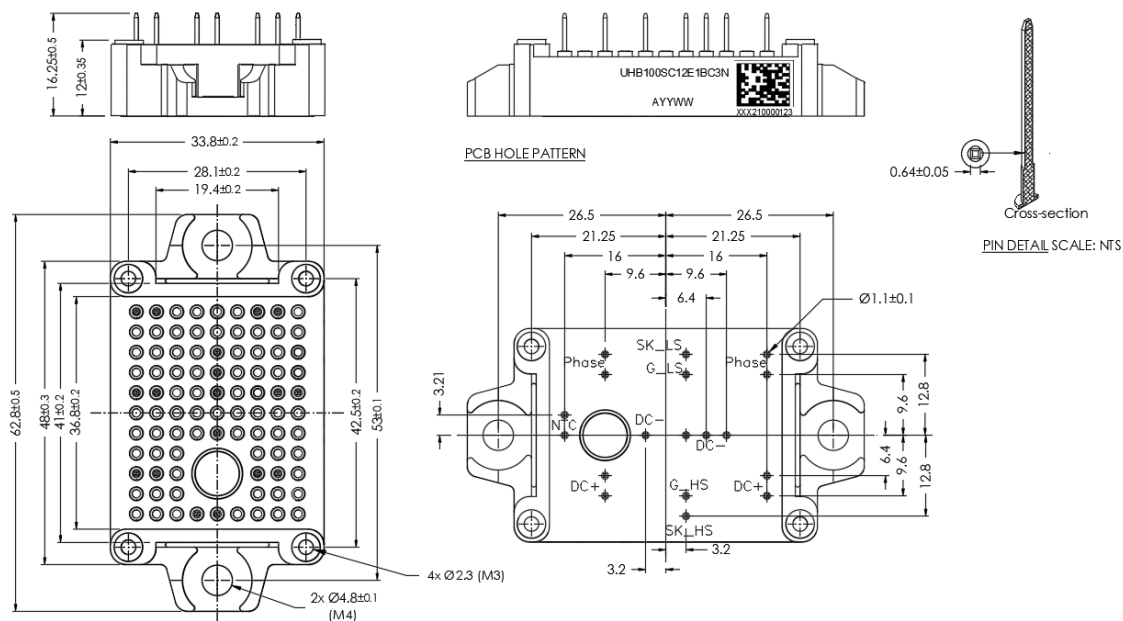


NOTES:

1. All dimensions in millimeters (mm)
2. General tolerance: ± 0.1 mm, unless otherwise specified

MANUFACTURING NOTE: E1B PACKAGE OUTLINE, PART MARKING and TRAY SPECIFICATION


Package outline for Full Bridge modules: UFB15C12E1BC3N & UFB25SC12E1BC3N

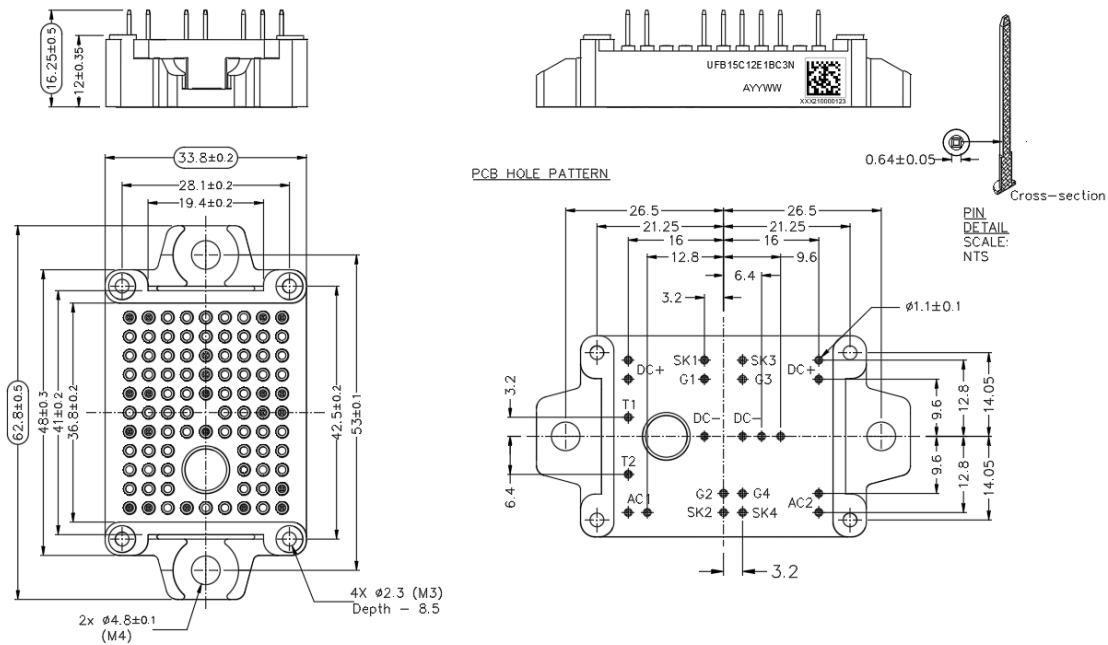

NOTES:

1. All dimensions in millimeters (mm)
2. General tolerance: ± 0.1 mm, unless otherwise specified

Branding Diagram (Marking)

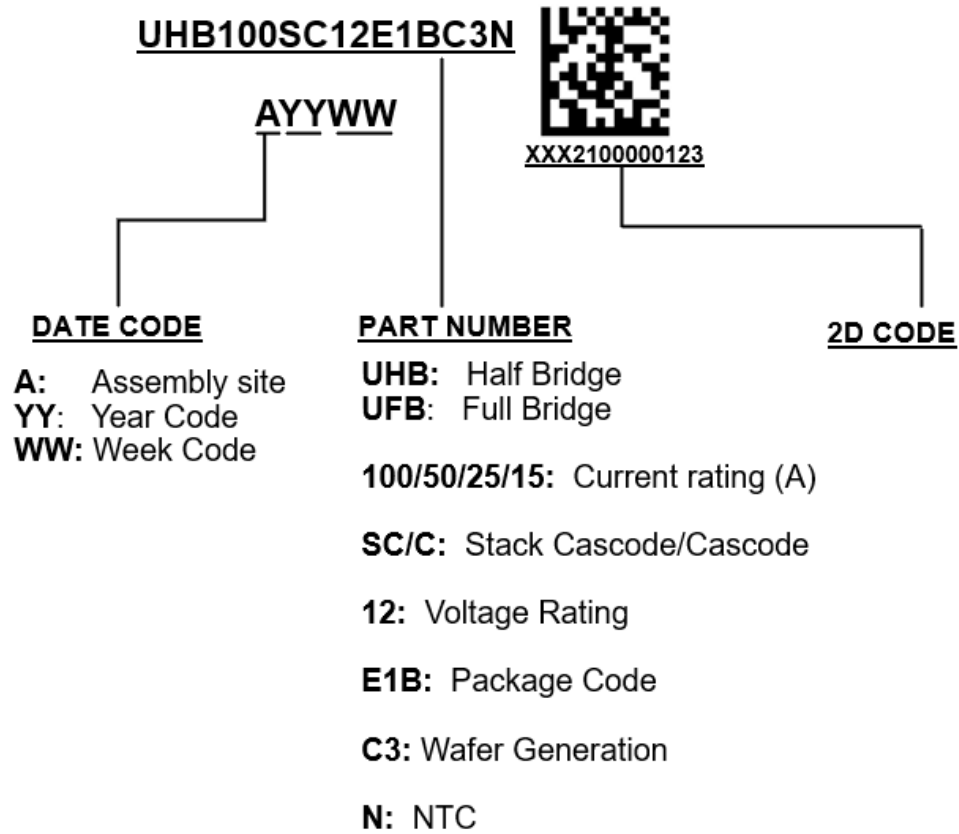

Carriers

Tray and Shipping Instructions

The module is placed in an ESD tray with a pocket carrier that holds the module in dead bug orientation. The pocket is designed to hold the module for shipping and for loading onto manufacturing equipment, while protecting the body and the solder pins from damaging stresses with a lid to seal the units firmly. Then trays are placed in a shipping box with desiccant, proper label, and protective packaging so secure the tray firmly prior packing with tape.

The individual tray pocket design and count can vary from vendor to vendor.

Tray

1. Tray size and specification for large quantity

Tray size: 356x276x30 mm
 Material: PS
 Unit Quantity per tray: 24 pcs



Figure 1

2. Tray size and specification for small quantity

Tray size: 199x192x31 mm
 Material: PS
 Unit Quantity per tray: 6 pcs

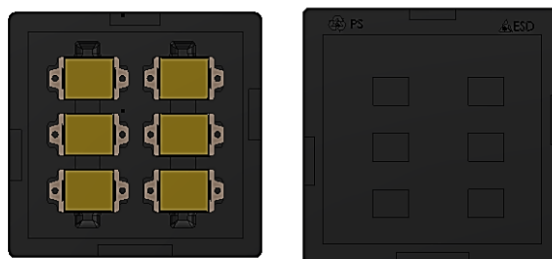


Figure 2

Storage and Handling

Storage and Handling Conditions

Excessive forces from shock or vibration as well as environmental factors must be avoided when transporting and handling the modules. Although it is not advised, it is feasible to store the modules at the temperature ranges listed in the datasheet. Furthermore, the modules can be subjected to environmental conditions, see reference below.

IEC 60721-3-1: Classification of environmental conditions.

IEC 60721- 3-2: Classification of groups of environmental parameters and their severities - Transportation and handling/

IEC 60721-3-3 Classification of groups of environmental parameters and their severities – Stationary use at weather protected locations.

ESD

Electrostatic discharge occurs naturally in the environment. With the increase in voltage potential, the outlets of neutralization or discharge will be sought. If the acquired discharge route is through a semiconductor device, destructive damage will result.

ESD countermeasure methods should be developed and used to Control potential ESD damage during handling in a factory environment at each manufacturing site.

This part is considered ESD sensitive and needs to be handled accordingly.

Qorvo recommends using standard ESD precautions (see Reference Documents) when handling these devices.

Reference Documents:

1. JEDEC Standard JESD625-A, "Requirements for Handling Electrostatic-Discharge-Sensitive (ESDS) Devices."
2. ANSI/ESD S20.20, "Protection of Electrical and Electronic Parts, Assemblies and Equipment (Excluding Electrically Initiated Explosive Devices)."

NOTE: The ESD level for this part is documented in the product qualification report that is available from Qorvo.

Contact Information

For the latest specifications, additional product information, worldwide sales and distribution locations:

Web: www.qorvo.com

Tel: +1 833-641-3811

Email: customer.support@qorvo.com

Important Notice

The information contained in this Data Sheet and any associated documents (“Data Sheet Information”) is believed to be reliable; however, Qorvo makes no warranties regarding the Data Sheet Information and assumes no responsibility or liability whatsoever for the use of said information. All Data Sheet Information is subject to change without notice. Customers should obtain and verify the latest relevant Data Sheet Information before placing orders for Qorvo® products. Data Sheet Information or the use thereof does not grant, explicitly, implicitly or otherwise any rights or licenses to any third party with respect to patents or any other intellectual property whether with regard to such Data Sheet Information itself or anything described by such information.

DATA SHEET INFORMATION DOES NOT CONSTITUTE A WARRANTY WITH RESPECT TO THE PRODUCTS DESCRIBED HEREIN, AND QORVO HEREBY DISCLAIMS ANY AND ALL WARRANTIES WITH RESPECT TO SUCH PRODUCTS WHETHER EXPRESS OR IMPLIED BY LAW, COURSE OF DEALING, COURSE OF PERFORMANCE, USAGE OF TRADE OR OTHERWISE, INCLUDING THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. Without limiting the generality of the foregoing, Qorvo® products are not warranted or authorized for use as critical components in medical, lifesaving, or life-sustaining applications, or other applications where a failure would reasonably be expected to cause severe personal injury or death. Applications described in the Data Sheet Information are for illustrative purposes only. Customers are responsible for validating that a particular product described in the Data Sheet Information is suitable for use in a particular application.

© 2020 Qorvo US, Inc. All rights reserved. This document is subject to copyright laws in various jurisdictions worldwide and may not be reproduced or distributed, in whole or in part, without the express written consent of Qorvo US, Inc. | QORVO® is a registered trademark of Qorvo US, Inc.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at www.onsemi.com/support/sales