

# LED Shunt

## NUD4700

The NUD4700 is an electronic shunt which provides a current bypass in the case of a single LED going into open circuit. LEDs are by nature quite fragile when subjected to transients and surge conditions. There are also many cases where high reliability of the LED lighting must be maintained such as headlights, lighthouses, bridges, aircraft, runways and so forth. In these cases the low cost addition of the NUD4700 will provide full assurance that an entire string of LEDs will not extinguish should one LED fail. NUD4700 is also applicable to other loads where circuit continuity is required. This device is designed to be used with 1 W LEDs (nominally 350 mA @ 3 V).

### Features



- A Simple Two Terminal Device
- Automatically Resets Itself if the LED Heals Itself or is Replaced
- ON-State Voltage Typically 1 V
- OFF-State Current less than 250  $\mu$ A
- Available with White Package
- SZ Prefix (black package only) for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q101 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

### Typical Applications

- LEDs where Preventive Maintenance is Non Practical
- LED Headlights
- LEDs with High Reliability Requirements
- Crowbar Protection for Open Circuit Conditions
- Overvoltage Protection for Sensitive Circuits



### MARKING DIAGRAM

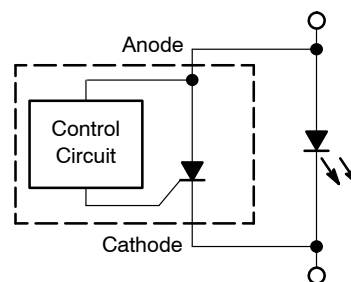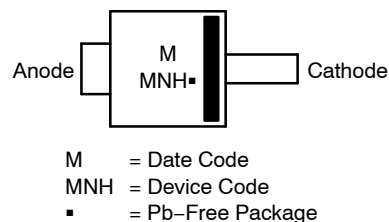

### PIN FUNCTION DESCRIPTION

| Pin     | Description                          |
|---------|--------------------------------------|
| Anode   | Positive Input Voltage to the Device |
| Cathode | Negative Input Voltage to the Device |

### ORDERING INFORMATION

| Device         | Package           | Shipping <sup>†</sup> |
|----------------|-------------------|-----------------------|
| NUD4700SNT1G   | POWERMITE (Black) | 3000/Tape & Reel      |
| SZNUD4700SNT1G | POWERMITE (Black) | 3000/Tape & Reel      |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).

# NUD4700

**MAXIMUM RATINGS** (Maximum ratings are those, that, if exceeded, may cause damage to the device. Electrical Characteristics are not guaranteed over this range)

| Rating                                                                          | Symbol       | Value        | Unit               |
|---------------------------------------------------------------------------------|--------------|--------------|--------------------|
| Peak Repetitive Off State Voltage (Anode to Cathode)                            | $V_{DM}$     | -0.3 to 10   | V                  |
| Average On-State Current, ( $T_A = 25^\circ\text{C}$ ),<br>(Note 1)<br>(Note 2) | $I_{T(AVG)}$ | 1.3<br>0.376 | A                  |
| Thermal Resistance, Junction-to-Air<br>(Note 1)<br>(Note 2)                     | $Q_{JA}$     | 80<br>277    | $^\circ\text{C/W}$ |
| Thermal Resistance, Junction-to-Lead                                            | $Q_{JL}$     | 35           | $^\circ\text{C/W}$ |
| Power Dissipation ( $T_A = 25^\circ\text{C}$ )<br>(Note 1)<br>(Note 2)          | $P_{MAX}$    | 1.56<br>0.45 | W                  |
| Operating Temperature Range                                                     | $T_J$        | -40 to 150   | $^\circ\text{C}$   |
| Non-Operating Temperature Range                                                 | $T_J$        | 150          | $^\circ\text{C}$   |
| Lead Temperature, Soldering (10 Sec)                                            | $T_L$        | 260          | $^\circ\text{C}$   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Mounted onto a 1" x 1" square copper pad.

Normally this device would be mounted on the same copper heat sink and adjacent to the LED. If the LED were to go open, then the NUD4700 shunt would now dissipate the power using the same copper heat sink. Since the NUD4700 has a voltage that is nominally 30% of the LED, then the power dissipation would be easily handled by the same heat sink as the LED.

2. Device mounted on minimum copper pad.

## ELECTRICAL CHARACTERISTICS (Unless otherwise noted: $T_A = 25^\circ\text{C}$ )

| Characteristics                                                                                          | Symbol     | Min         | Typ               | Max           | Unit          |
|----------------------------------------------------------------------------------------------------------|------------|-------------|-------------------|---------------|---------------|
| Off-State Current<br>( $V_{Anode} = 5\text{ V}$ )                                                        | $I_{LEAK}$ | -           | 100               | 250           | $\mu\text{A}$ |
| Breakdown Voltage<br>( $I_{BR} = 1\text{ mA}$ )                                                          | $V_{(BR)}$ | 5.5         | -                 | 7.5           | V             |
| Holding Current<br>( $V_{Anode} = 10\text{ V}$ , $I_{initial} = 100\text{ mA}$ )                         | $I_H$      | -           | 6.0               | 12            | mA            |
| Latching Current<br>( $V_{Anode} = 10\text{ V}$ )                                                        | $I_L$      | -           | 35                | 70            | mA            |
| On-State Voltage<br>( $I_T = 0.350\text{ A}$ )<br>( $I_T = 0.750\text{ A}$ )<br>( $I_T = 1.0\text{ A}$ ) | $V_T$      | -<br>-<br>- | 1.0<br>1.0<br>1.0 | 1.2<br>-<br>- | V             |

## DYNAMIC CHARACTERISTICS

|                                                                                                                                     |         |     |   |   |                        |
|-------------------------------------------------------------------------------------------------------------------------------------|---------|-----|---|---|------------------------|
| Critical Rate-of-Rise of Off State Voltage<br>( $V_{pk} = \text{Rated } V_{(BR)}$ , $T_J = 125^\circ\text{C}$ , Exponential Method) | $dV/dt$ | 250 | - | - | $\text{V}/\mu\text{s}$ |
|-------------------------------------------------------------------------------------------------------------------------------------|---------|-----|---|---|------------------------|

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

TYPICAL PERFORMANCE CURVES

( $T_A = 25^\circ\text{C}$  UNLESS OTHERWISE NOTED)

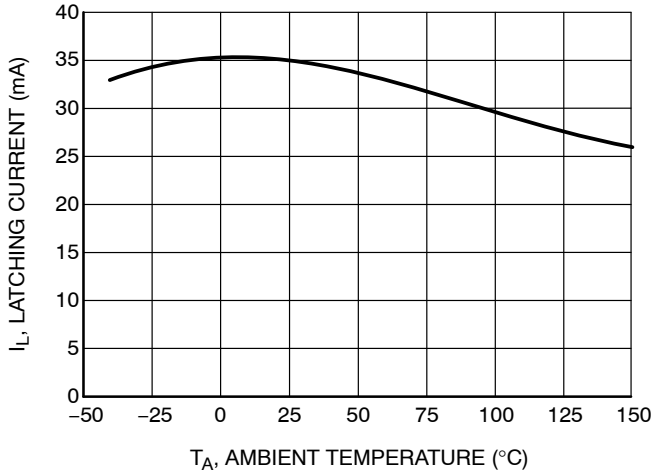


Figure 1. Latching Current vs Temperature

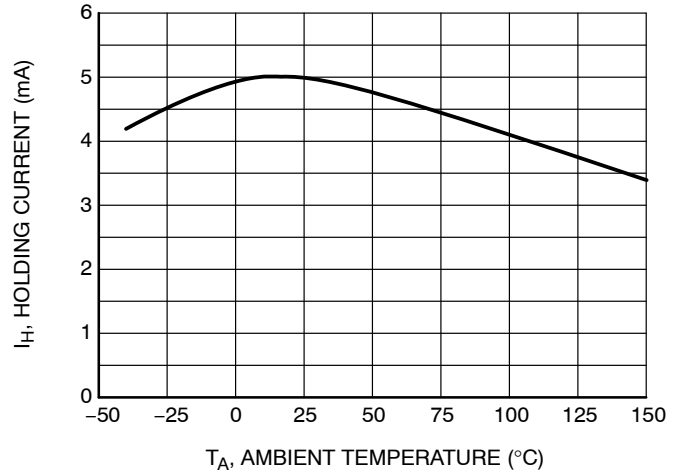


Figure 2. Holding Current vs Temperature

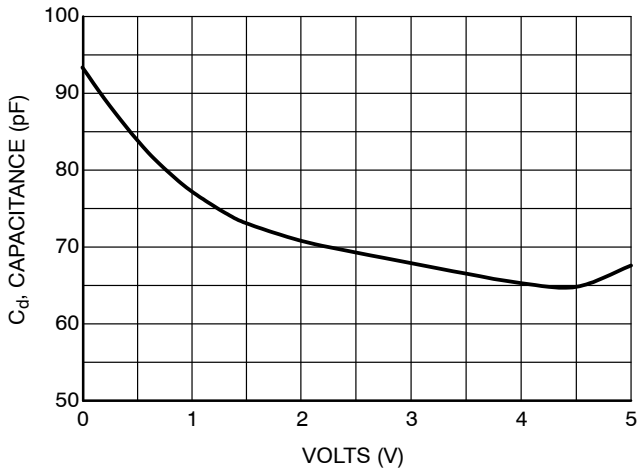


Figure 3. Capacitance vs Voltage

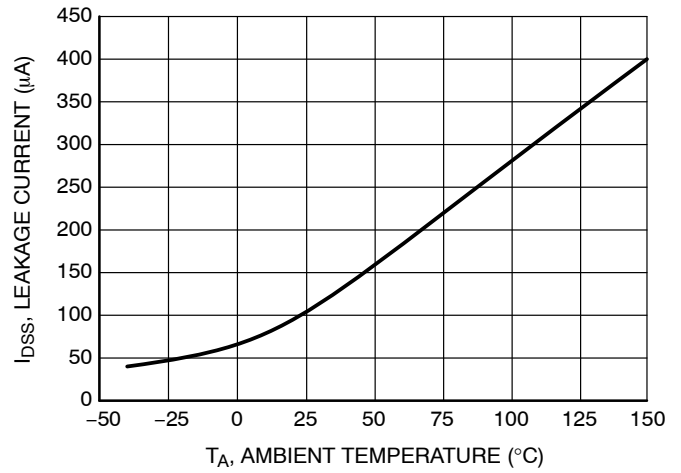


Figure 4. Leakage Current vs Temperature

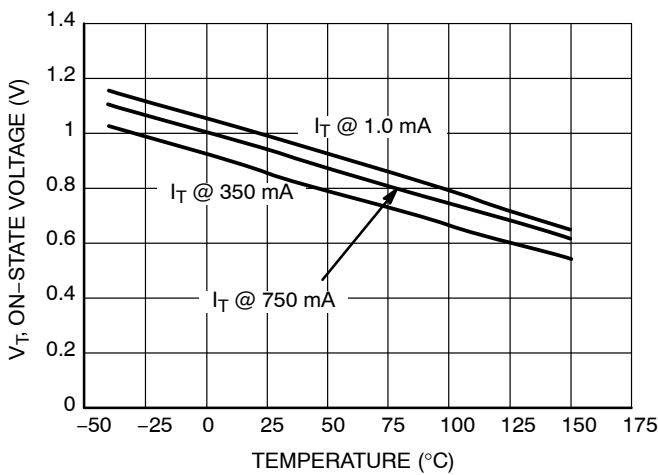


Figure 5. On-State Voltage vs. Temperature

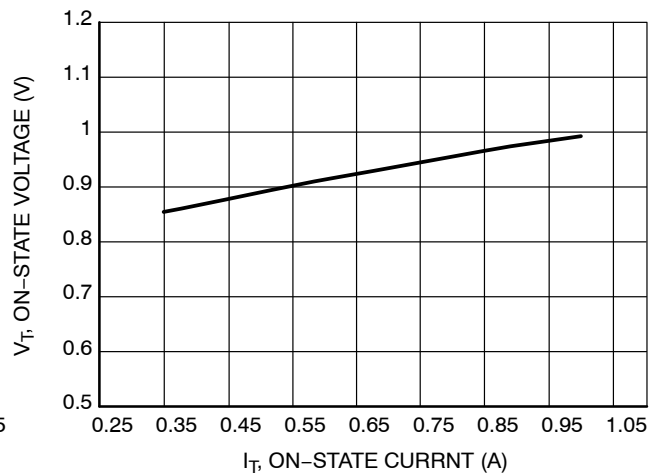


Figure 6. On-State Voltage vs. On-State Current ( $I_T$ ) at  $25^\circ\text{C}$

# NUD4700

## TYPICAL APPLICATION CIRCUIT

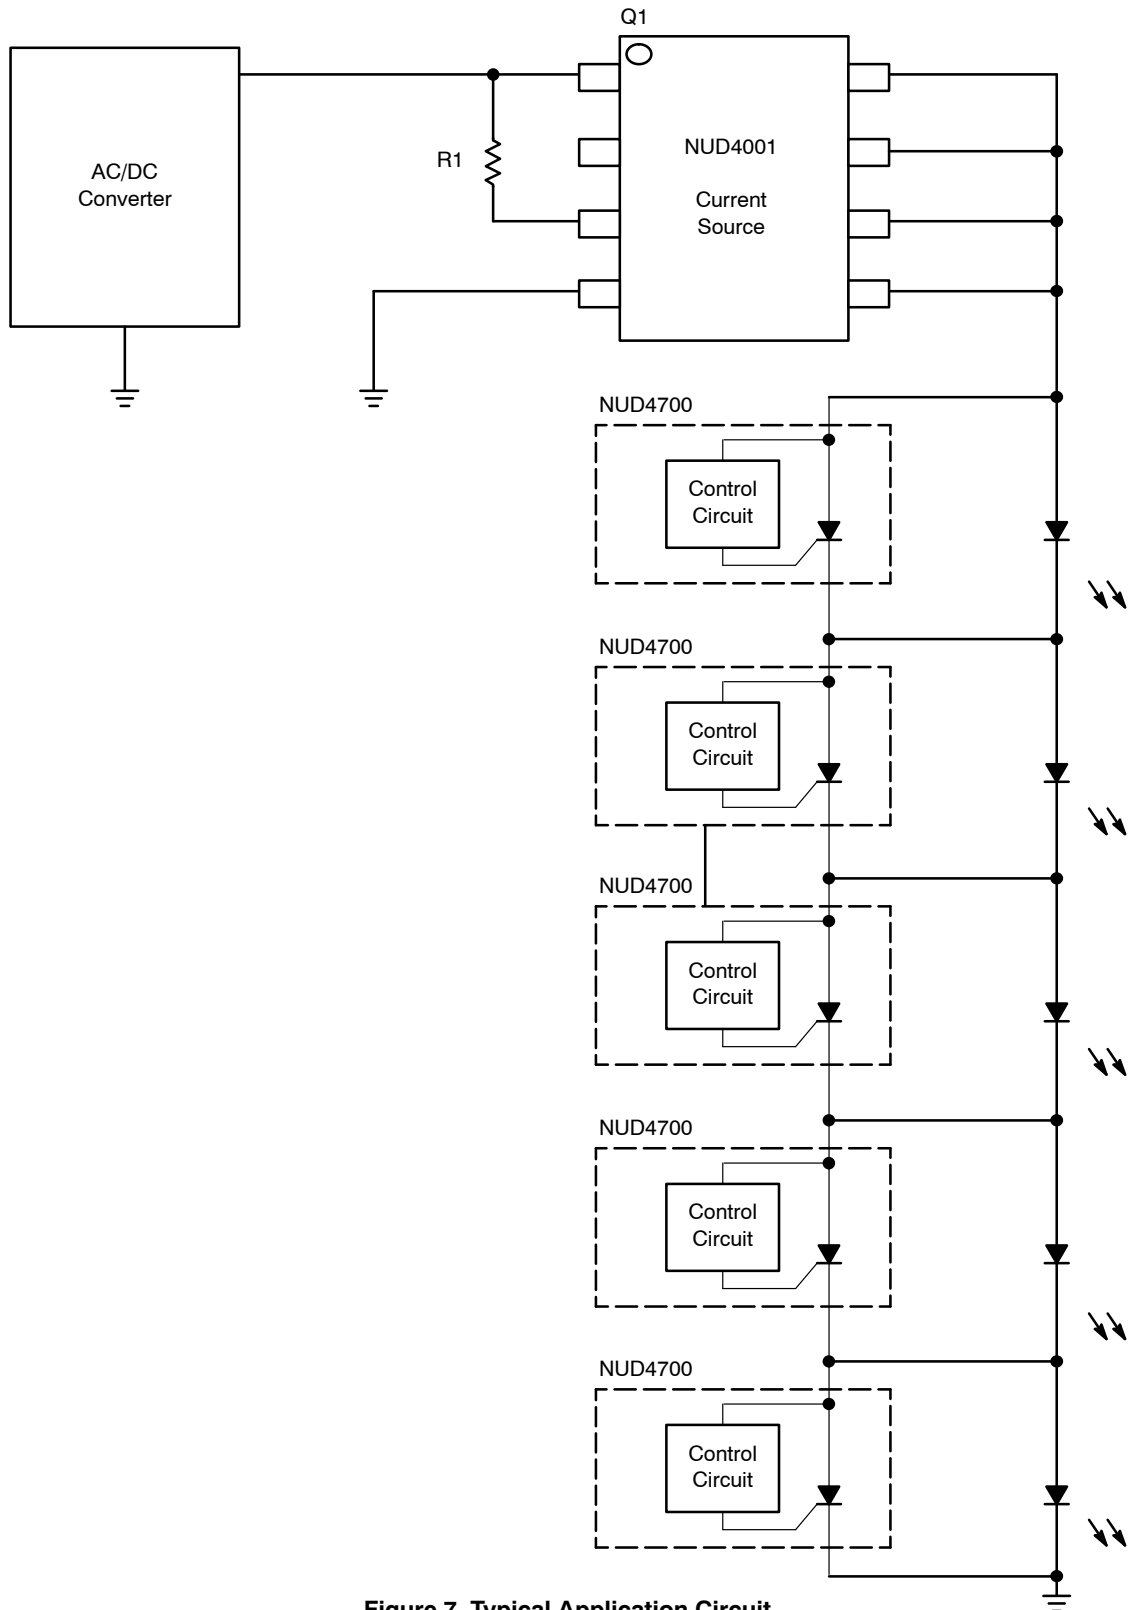


Figure 7. Typical Application Circuit

# NUD4700

## TYPICAL OPERATION WAVEFORMS

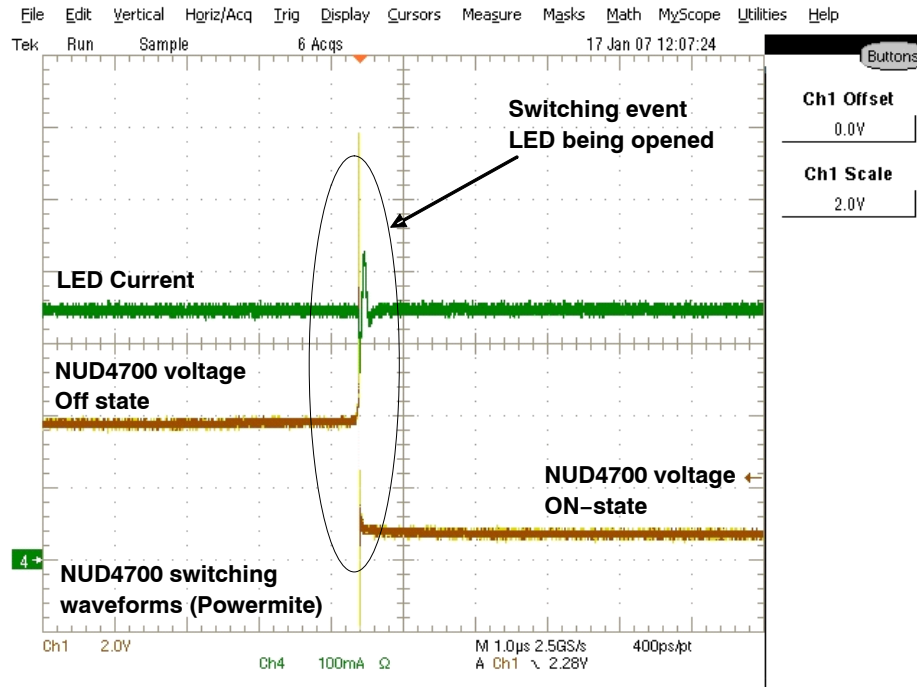


Figure 8. NUD4700 Switching Waveforms

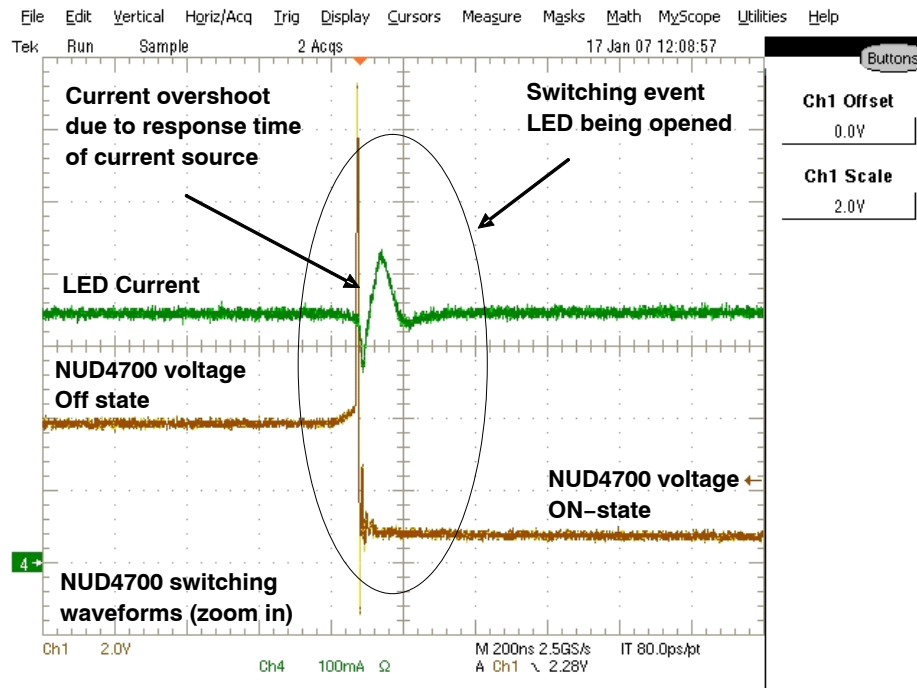



Figure 9. Zoom in of Figure 8

POWERMITE is a registered trademarks of and used under a license from Microsemi Corporation.



**POWERMITE 1.90x1.96x1.00**  
**CASE 457**  
**ISSUE H**


DATE 16 MAY 2025

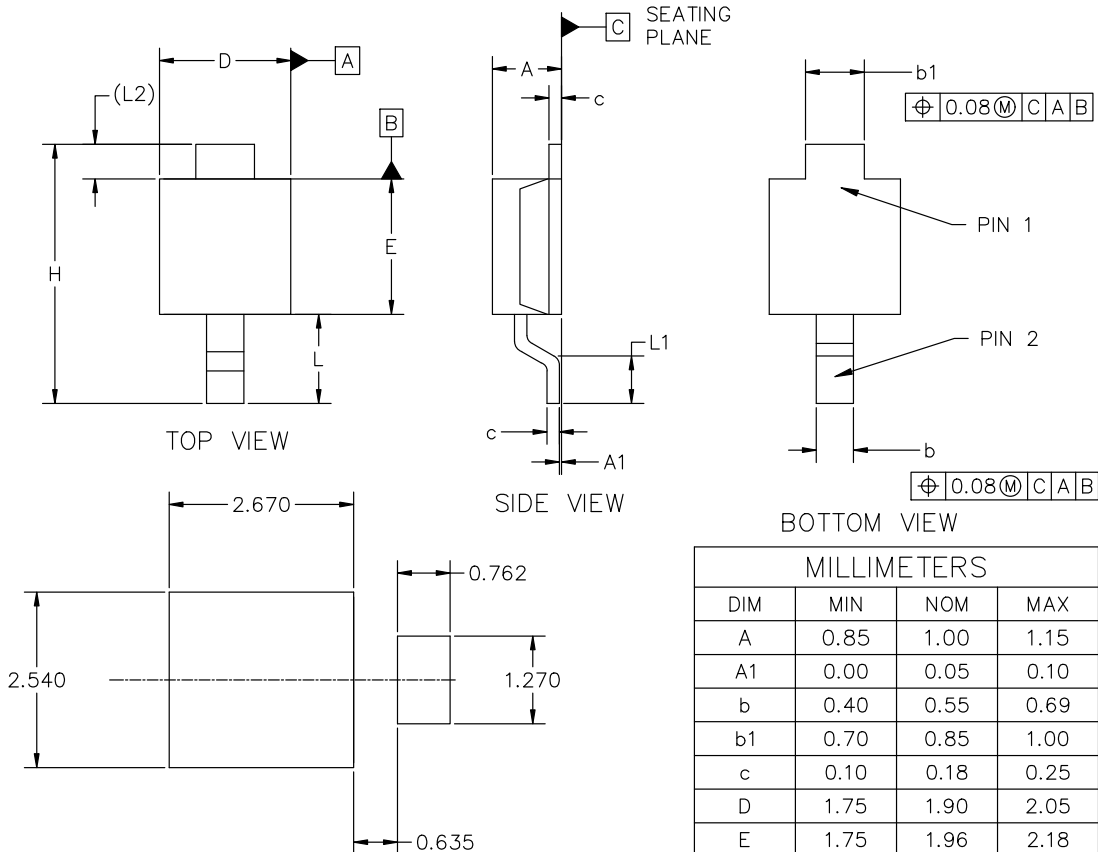

| MILLIMETERS |          |      |      |
|-------------|----------|------|------|
| DIM         | MIN      | NOM  | MAX  |
| A           | 0.85     | 1.00 | 1.15 |
| A1          | 0.00     | 0.05 | 0.10 |
| b           | 0.40     | 0.55 | 0.69 |
| b1          | 0.70     | 0.85 | 1.00 |
| c           | 0.10     | 0.18 | 0.25 |
| D           | 1.75     | 1.90 | 2.05 |
| E           | 1.75     | 1.96 | 2.18 |
| H           | 3.60     | 3.75 | 3.90 |
| L           | 1.20     | 1.35 | 1.50 |
| L1          | 0.50     | 0.65 | 0.80 |
| L2          | 0.50 REF |      |      |

- NOTES:
1. DIMENSIONING AND TOLERANCING AS PER ASME Y14.5M, 2018.
  2. CONTROLLING DIMENSION: MILLIMETERS.
  3. DIMENSION D & E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS OR GATE BURRS.

**GENERIC**  
**MARKING DIAGRAMS\***

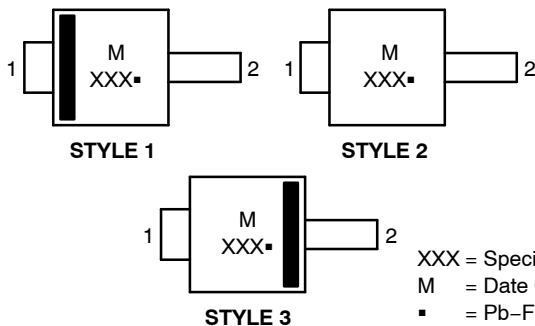

XXX = Specific Device Code  
M = Date Code  
▪ = Pb-Free Package

STYLE 1:  
PIN 1: CATHODE  
2: ANODE

STYLE 2:  
PIN 1: ANODE OR CATHODE  
2: CATHODE OR ANODE  
(BI-DIRECTIONAL)

STYLE 3:  
PIN 1: ANODE  
2: CATHODE

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

|                         |                                 |                                                                                                                                                                                  |
|-------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB14853C</b>              | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>POWERMITE 1.90x1.96x1.00</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)