

Low Voltage Quad 2-Input Multiplexer

74LVX157




General Description

The LVX157 is a high-speed quad 2-input multiplexer. Four bits of data from two sources can be selected using the common Select and Enable inputs. The four outputs present the selected data in the true (noninverted) form. The LVX157 can also be used as a function generator.

Features


- Input Voltage Level Translation from 5 V to 3 V
- Ideal for Low Power/Low Noise 3.3 V Applications
- Guaranteed Simultaneous Switching Noise Level and Dynamic Threshold Performance
- This Device is Halide Free and Pb-Free

Logic Symbols

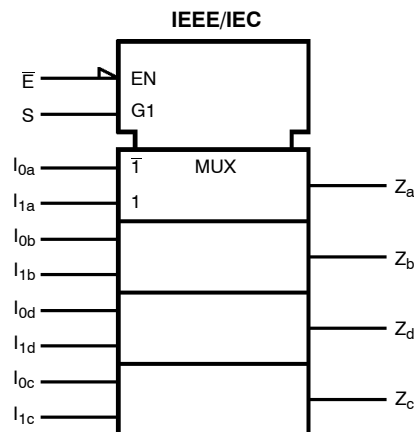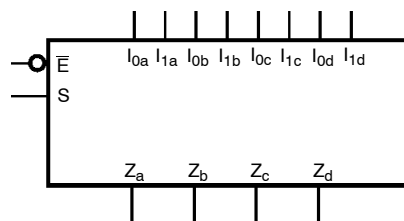

TSSOP 16
CASE 948AH


MARKING DIAGRAM



XXXXXX = Specific Device Code
A = Assembly Location
L = Wafer Lot
Y = Year
W = Work Week
G or ■ = Pb-Free Package

(Note: Microdot may be in either location)

CONNECTION DIAGRAM



PIN DESCRIPTION

Pins	Function
I0a-I0d	Source 0 Data Inputs
I1a-I1d	Source 1 Data Inputs
E	Enable Input
S	Select Input
Za-Zd	Outputs

ORDERING INFORMATION

See detailed ordering and shipping information in the package dimensions section on page 5 of this data sheet.

74LVX157

TRUTH TABLE

INPUTS				OUTPUT
$\bar{E}$	S	I_0	I_1	Z
H	X	X	X	L
L	H	X	L	L
L	H	X	H	H
L	L	L	X	L
L	L	H	X	H

H = HIGH Voltage Level; L = LOW Voltage Level, X = Immaterial

Functional Description

The L VX157 is a quad 2-input multiplexer. It selects four bits of data from two sources under the control of a common Select input (S). The Enable input (E) is active-LOW. When E is HIGH, all of the outputs (Z) are forced LOW regardless

of all other inputs. The LVX157 is the logic implementation of a 4-pole, 2-position switch where the position of the switch is determined by the logic levels supplied to the Select input. The logic equations for the outputs are shown below:

$$Z_a = \bar{E} \cdot (I_{1a} \cdot S + I_{0a} \cdot S)$$

$$Z_b = \bar{E} \cdot (I_{1b} \cdot S + I_{0b} \cdot S)$$

$$Z_c = \bar{E} \cdot (I_{1c} \cdot S + I_{0c} \cdot S)$$

$$Z_d = \bar{E} \cdot (I_{1d} \cdot S + I_{0d} \cdot S)$$

A common use of the LVX157 is the moving of data from two groups of registers to four common output busses. The particular register from which the data comes is determined by the state of the Select input. A less obvious use is as a function generator. The LVX157 can generate any four of the sixteen different functions of two variables with one variable common. This is useful for implementing gating functions.

Logic Diagram

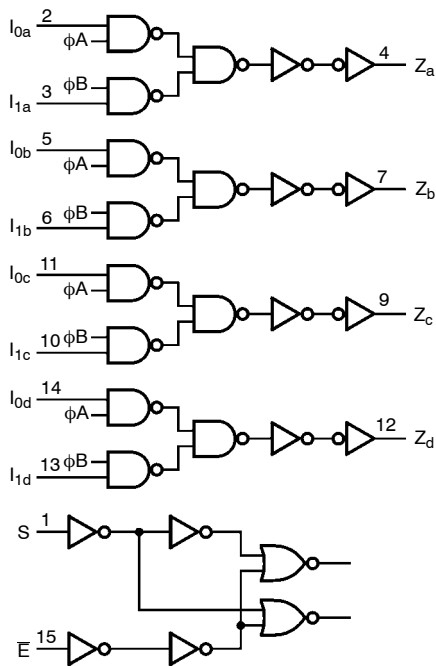


Figure 1. Logic Diagram

MAXIMUM RATINGS

Symbol	Parameter	Value	Unit
V _{CC}	DC Supply Voltage	–0.5 to +6.5	V
V _{IN}	DC Input Voltage	–0.5 to +6.5	V
V _{OUT}	DC Output Voltage	–0.5 to V _{CC} + 0.5	V
I _{IN}	DC Input Current, per Pin	±20	mA
I _{OUT}	DC Output Current, per Pin	±25	mA
I _{CC}	DC Supply Current, V _{CC} and GND Pins	±75	mA
I _{IK}	Input Clamp Current	–20	mA
I _{OK}	Output Clamp Current	±20	mA
T _{STG}	Storage Temperature Range	–65 to +150	°C
T _L	Lead Temperature, 1 mm from Case for 10 Seconds	260	°C
T _J	Junction Temperature Under Bias	+150	°C
θ _{JA}	Thermal Resistance (Note 1)	159	°C/W
P _D	Power Dissipation in Still Air at 25 °C	787	mW
MSL	Moisture Sensitivity	Level 1	
F _R	Flammability Rating	Oxygen Index: 28 to 34 UL 94 V-0 @ 0.125 in	
V _{ESD}	ESD Withstand Voltage (Note 2)	Human Body Model Charged Device Model 2000 N/A	V

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Measured with minimum pad spacing on an FR4 board, using 76mm-by-114mm, 2-ounce copper trace no air flow per JESD51-7.
2. HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.

RECOMMENDED OPERATING CONDITIONS

Symbol	Parameter	Min	Max	Unit
V _{CC}	DC Supply Voltage	2.0	3.6	V
V _{in}	DC Input Voltage (Note 3)	0	5.5	V
V _{out}	DC Output Voltage (Note 3)	0	V _{CC}	V
T _A	Operating Temperature	–40	+85	°C
t _r , t _f	Input Rise and Fall Time	0	100	ns/V

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

3. Unused inputs must always be tied to an appropriate logic voltage level (e.g., either GND or V_{CC}). Unused outputs must be left open.

DC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	Test Conditions	V _{CC}	T _A = 25 °C			T _A = -40 to 85 °C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		2.0 3.0 3.6	1.5 2.0 2.4	– – –	– – –	1.5 2.0 2.4	– – –	V
V _{IL}	Low-Level Input Voltage		2.0 3.0 3.6	– – –	– – –	0.5 0.8 0.8	– – –	0.5 0.8 0.8	V
V _{OH}	High-Level Output Voltage (V _{IN} = V _{IL} or V _{IH})	I _{OH} = -50 µA I _{OH} = -50 µA I _{OH} = -4 mA	2.0 3.0 3.0	1.9 2.9 2.58	2.0 3.0 –	– – –	1.9 2.9 2.48	– – –	V
V _{OL}	Low-Level Output Voltage (V _{IN} = V _{IL} or V _{IH})	I _{OL} = 50 µA I _{OL} = 50 µA I _{OL} = 4 mA	2.0 3.0 3.0	– – –	0.0 0.0 –	0.1 0.1 0.36	– – –	0.1 0.1 0.44	V
I _{IN}	Input Leakage Current	V _{in} = 5.5 V or GND	3.6	–	–	±0.1	–	±1.0	µA
I _{CC}	Quiescent Supply Current	V _{in} = V _{CC} or GND	3.6	–	–	4.0	–	40.0	µA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

NOISE CHARACTERISTICS (Note 4)

Symbol	Characteristic	C _L (pF)	V _{CC} (V)	T _A = 25 °C		Unit
				Typ	Max	
V _{OLP}	Quiet Output Maximum Dynamic V _{OL}	50	3.3	0.3	0.5	V
V _{OLV}	Quiet Output Minimum Dynamic V _{OL}	50	3.3	-0.3	-0.5	V
V _{IHD}	Minimum HIGH Level Dynamic Input Voltage	50	3.3	–	2.0	V
V _{ILD}	Maximum LOW Level Dynamic Input Voltage	50	3.3	–	0.8	V

4. Input $t_r = t_f = 3$ ns

AC ELECTRICAL CHARACTERISTICS

Symbol	Parameter	C _L (pF)	V _{CC} (V)	T _A = 25 °C			T _A = -40 to 85 °C		Unit
				Min	Typ	Max	Min	Max	
t _{PLH} , t _{PHL}	Propagation Delay Time, I _n to Z _n	15	2.7	–	6.6	12.5	1.0	15.5	ns
		50		–	9.1	16.0	1.0	19.0	
		15 50	3.3 ± 0.3	– –	5.1 7.6	7.9 11.4	1.0 1.0	9.5 13.0	
t _{PLH} , t _{PHL}	Propagation Delay Time, S to Z _n	15	2.7	–	8.9	16.9	1.0	20.5	ns
		50		–	11.4	20.4	1.0	24.0	
		15 50	3.3 ± 0.3	– –	7.0 9.5	11.0 14.5	1.0 1.0	13.0 16.5	
t _{PLH} , t _{PHL}	Propagation Delay Time, E to Z _n	15	2.7	–	9.1	17.6	1.0	20.5	ns
		50		–	11.6	21.1	1.0	24.0	
		15 50	3.3 ± 0.3	– –	7.2 9.7	11.5 15.0	1.0 1.0	13.5 17.0	
t _{OSHL} , t _{OSLH}	Output to Output Skew (Note 5)	50	2.7 3.3	– –	– –	1.5 1.5	– –	1.5 1.5	ns

5. Parameter guaranteed by design.

$$t_{OSLH} = |t_{PLHm} - t_{PLHn}|$$

$$t_{OSHL} = |t_{PHLm} - t_{PHLn}|$$

74LVX157

CAPACITIVE CHARACTERISTICS

Symbol	Parameter	T _A = 25 °C			T _A = -40 to 85 °C		Unit
		Min	Typ	Max	Min	Max	
C _{in}	Input Capacitance	–	4	10	–	10	pF
C _{PD}	Power Dissipation Capacitance (Note 6)	–	20	–	–	–	pF

6. C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: $I_{CC(opr.)} = C_{PD} \times V_{CC} \times f_{IN} + I_{CC}$

ORDERING INFORMATION

Device	Marking	Package	Shipping [†]
74LVX157MTCX	LVX 157	TSSOP-16 (Pb-Free)	2500 Units / Tape & Reel

[†]For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, [BRD8011/D](#).


74LVX157

REVISION HISTORY

Revision	Description of Changes	Date
2	Converted the Data Sheet to onsemi format with the updates in Ordering Information Table, Recommended Operating Table, Maximum Rating Table.	05/06/2025

TSSOP 16
CASE 948AH
ISSUE O

DATE 19 SEP 2008

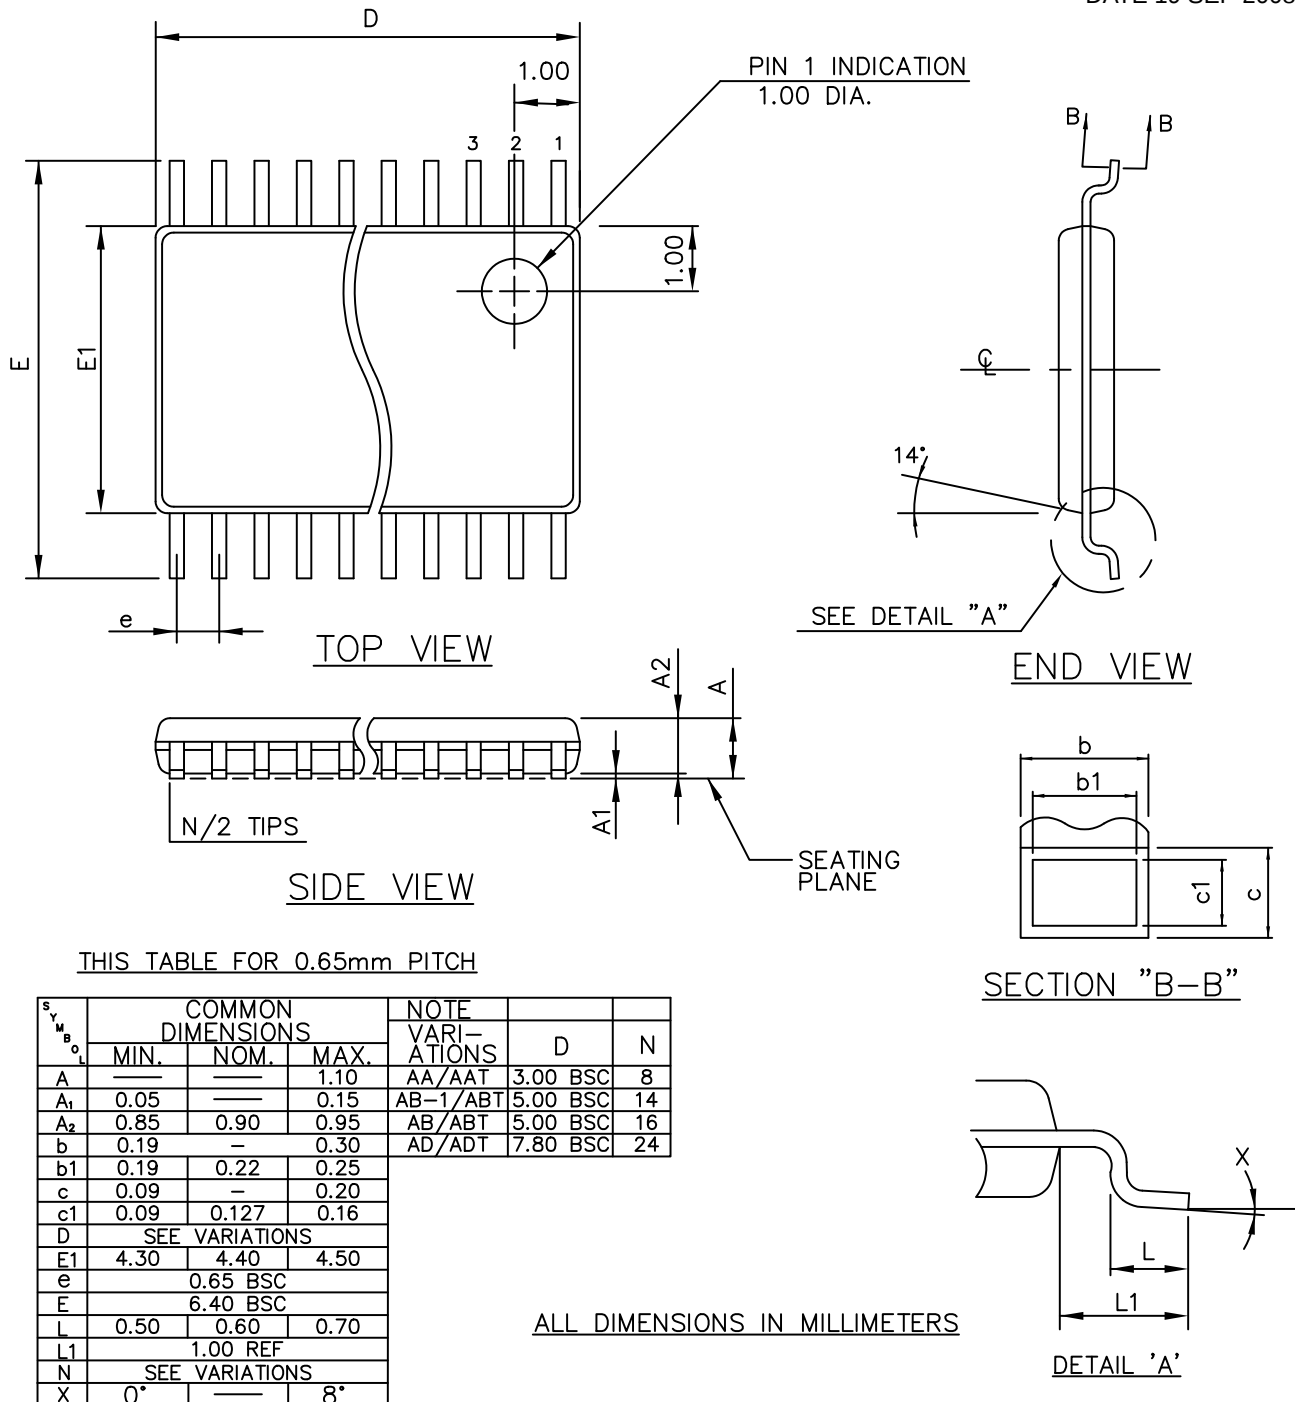

MOLD FLASH OR PROTRUSIONS SHALL NOT EXCEED 0.15mm ON D PER SIDE

DOCUMENT NUMBER:	98AON34923E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.
DESCRIPTION:	TSSOP 16	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

onsemi, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:

Technical Library: www.onsemi.com/design/resources/technical-documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support

For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales