



NGTG20N60L2TF1G

N-Channel IGBT

600V, 20A, V_{CE(sat)};1.45V 单体TO-3PF-3L

ON Semiconductor®

www.onsemi.cn

主要特长

- IGBT V_{CE(sat)}=1.45V typ. (I_C=20A, V_{GE}=15V)
- IGBT t_f=67ns typ.
- 增强型 (Enhancement type)
- 适用全绝缘型封装
- 最高结温 T_j=175°C

应用

- 白物家电的功率因数校正
- 通用变频器 (General purpose inverter)

规格

绝对最大额定值 / Ta = 25°C (除非特殊指定)

参数	记号	条件	额定值	单位	
集电极-发射极电压(Collector to Emitter Voltage)	V _{CEs}		600	V	
栅极-发射极电压(Gate to Emitter Voltage)	V _{GES}		±20	V	
集电极电流 Collector Current (DC)	I _C *1	Limited by T _{jmax}	@ T _c =25°C *2	40	A
			@ T _c =100°C *2	20	A
集电极电流 Collector Current (脉冲)	I _{CP}	Pulse width Limited by T _{jmax}	105	A	
允许功耗(Allowable Power Dissipation)	P _D	T _c =25°C (Our ideal heat dissipation condition) *2	64	W	
结温(Junction Temperature)	T _j		175	°C	
储存温度(Storage Temperature)	T _{stg}		- 55 to +175	°C	

注：*1 集电极电流由下式计算:

$$I_C(T_c) = \frac{T_{jmax} - T_c}{R_{th(j-c)} \times V_{CE(sat)}(T_j, I_C(T_c))}$$

*2 我司的条件为背面散热。


方法为:器件的背面涂上硅脂,然后将该器件贴在 铝制的水冷散热器上。

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


订单及封装情况

器件名称	封装	出货包装	注解
NGTG20N60L2TF1G	TO-3PF-3L SC-94	30 pcs. / tube	不含铅

印刷图



电气连接



NGTG20N60L2TF1G

电气特性 / Ta = 25°C (除非特殊指定)

参数	记号	条件	额定值			单位
			min	typ	max	
集电极-发射极击穿电压 (Collector to Emitter Breakdown Voltage)	V(BR)CES	IC=500μA, VGE=0V	600			V
集电极-发射极截止电流 (Collector to Emitter Cutoff Current)	ICES	VCE=600V, VGE=0V			10	μA
					1	mA
栅极-发射极漏电流 (Gate to Emitter Leakage Current)	IGES	VGE=±20V, VCE=0V			±100	nA
栅极-发射极阈值电压 (Gate to Emitter threshold voltage)	VGE(th)	VCE=20V, IC=250μA	4.5		6.5	V
集电极-发射极饱和电压 (Collector to Emitter Saturated Voltage)	VCE(sat)	VGE=15V, IC=20A		1.45	1.65	V
				1.8		V
输入电容(Input Capacitance)	Cies	VCE=20V, f=1MHz		2000		pF
输出电容(Output Capacitance)	Coes			60		pF
反向传输电容 (Reverse Transfer Capacitance)	Cres			50		pF
开启延迟时间(Turn-on delay time)	td(on)	VCC=300V, IC=20A RG=30Ω, L=200μH VGE=0V/15V Vclamp=400V 参照图 1, 图 2		60		ns
上升时间(Rise Time)	tr			37		ns
开启时间(Turn-ON Time)	ton			400		ns
关断延迟时间(Turn-OFF Delay Time)	td(off)			193		ns
下降时间(Fall Time)	tf			67		ns
关断时间(Turn-OFF Time)	toff			281		ns
总栅极电荷(Total Gate Charge)	Qg				84	
栅极-发射极电荷(Gate to Emitter charge)	Qge	VCE=300V, VGE=15V, IC=20A		16		nC
栅极-集电极米勒电荷 (Gate to Collector "Miller" Charge)	Qgc			37		nC

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

热特性 / Ta = 25°C (除非特殊指定)

参数	记号	条件	额定值	单位
热阻(结到外壳) Thermal Resistance (junction- Case)	Rth(j-c)	Tc=25°C (我司的理想散热条件)*2	2.33	°C/W
热阻(结到环境) Thermal Resistance (junction- atmosphere)	Rth(j-a)		47.5	°C/W

图 1 : 开关时间测试电路










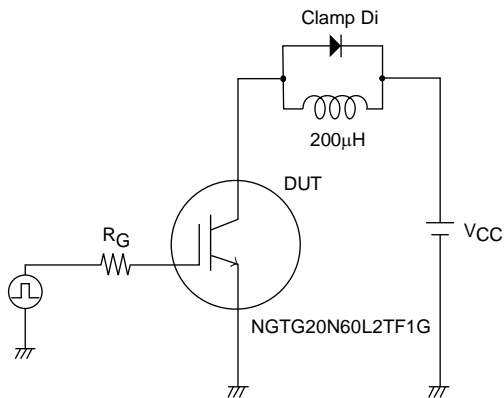


图 2 : 时间图

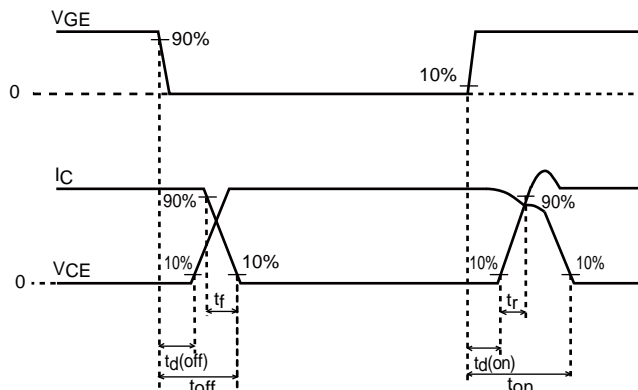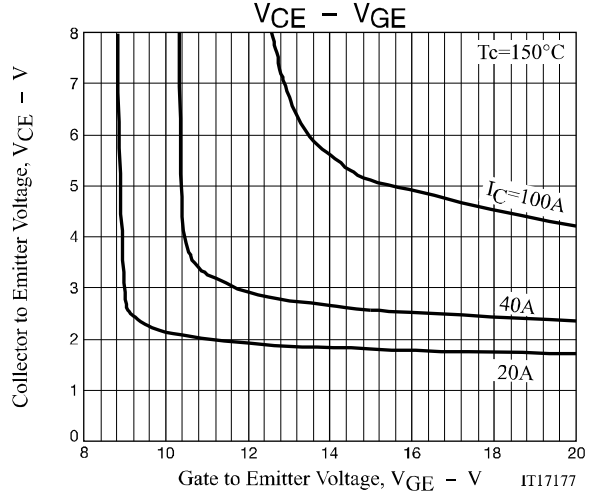
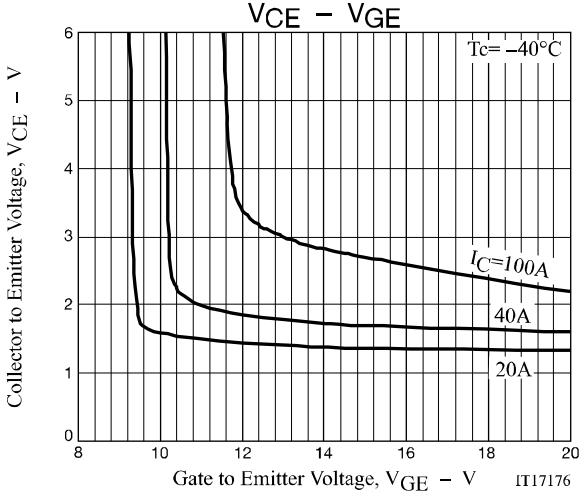
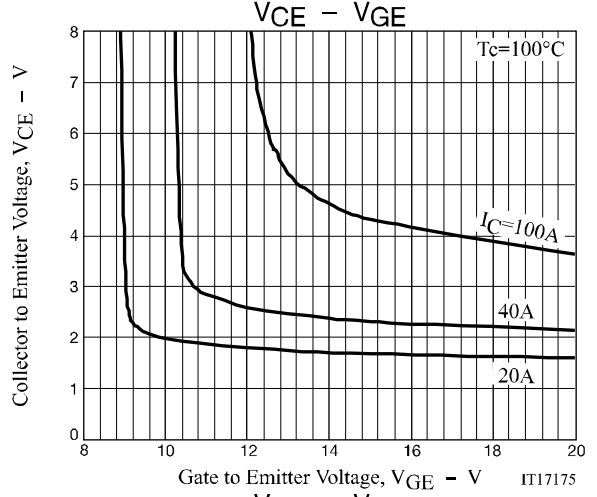
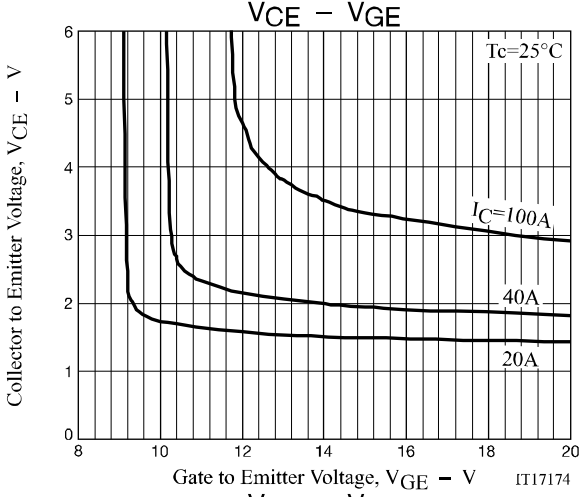
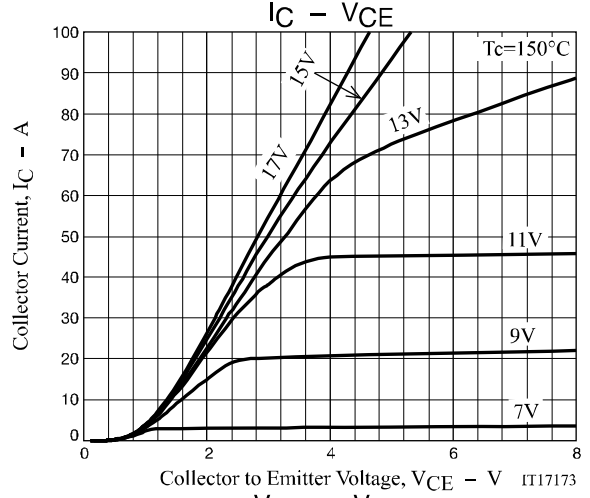
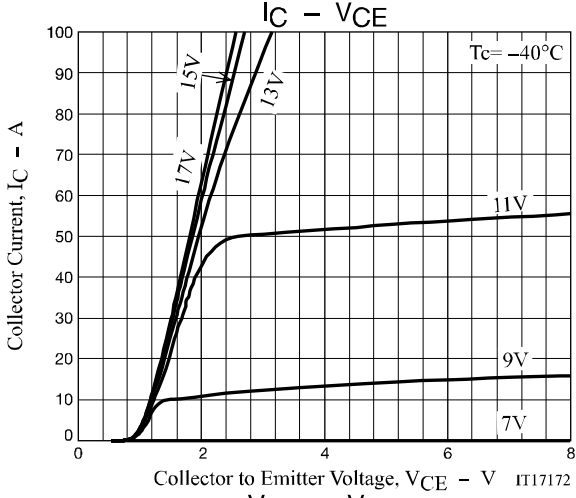
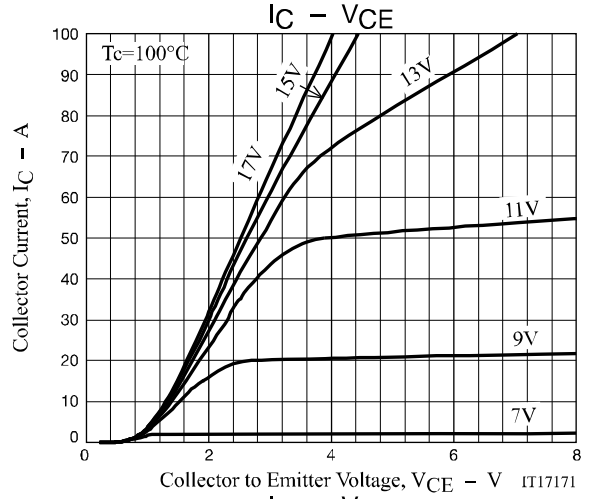


IT16383





NGTG20N60L2TF1G

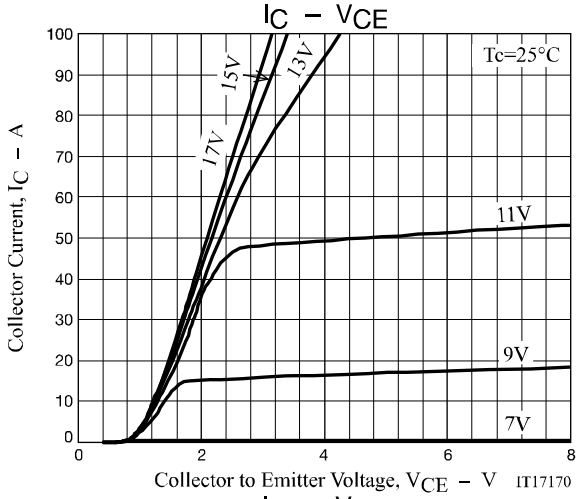

NGTG20N60L2TF1G

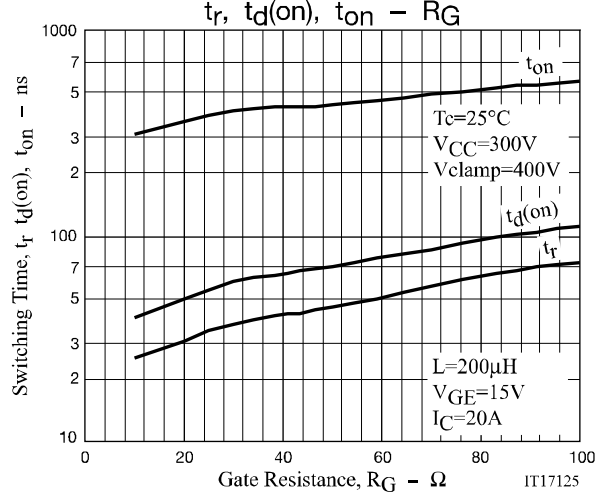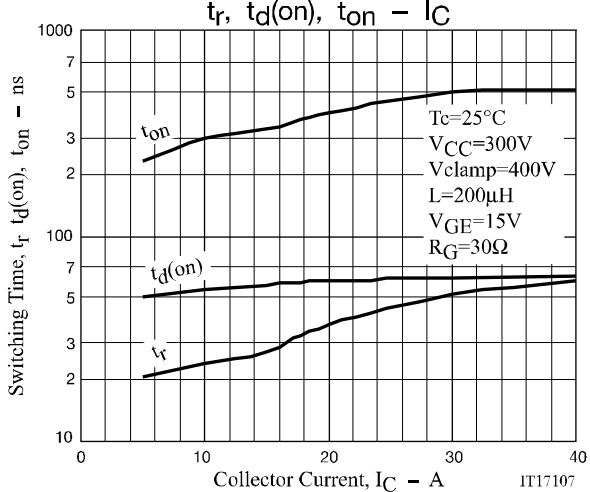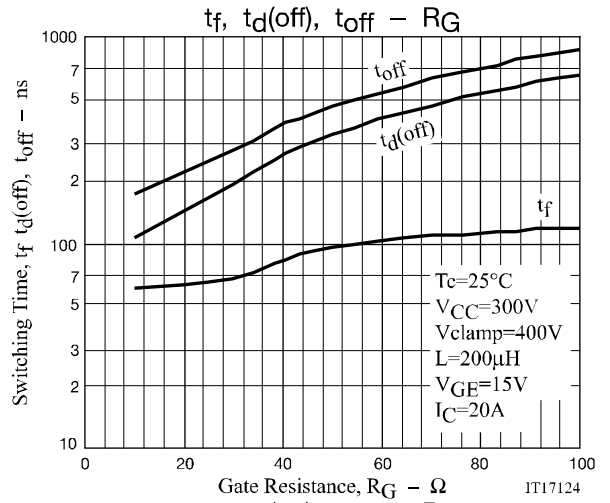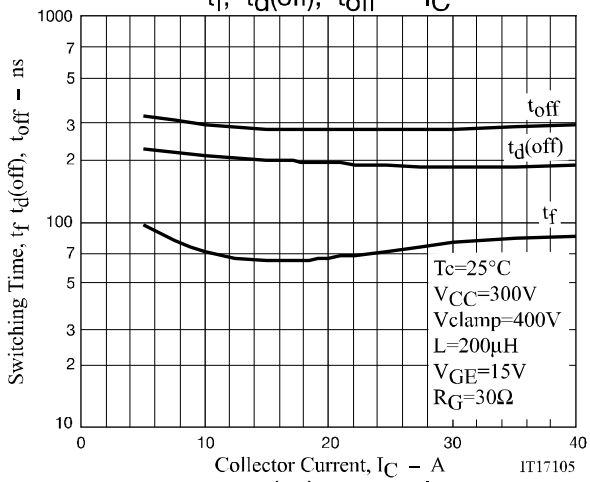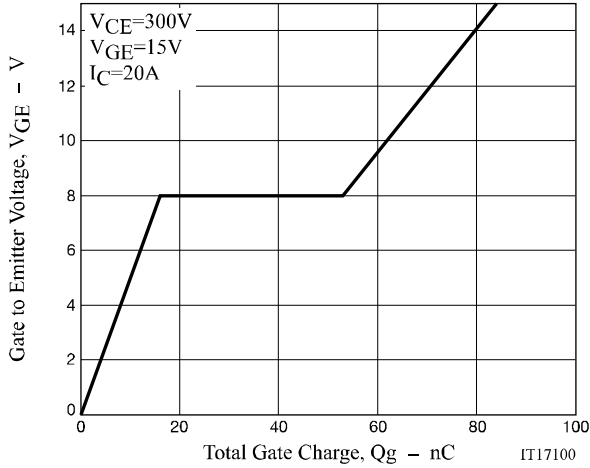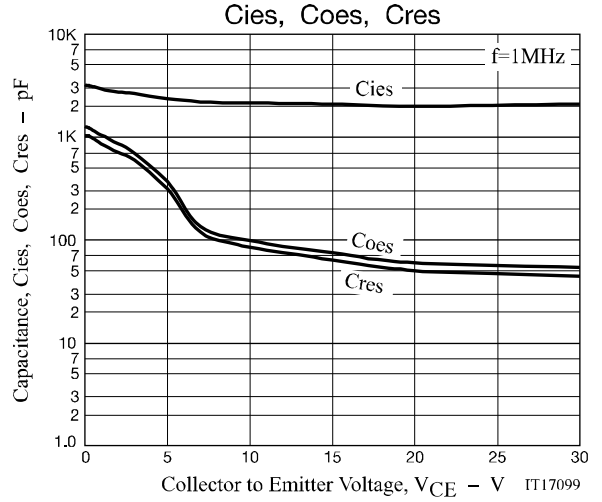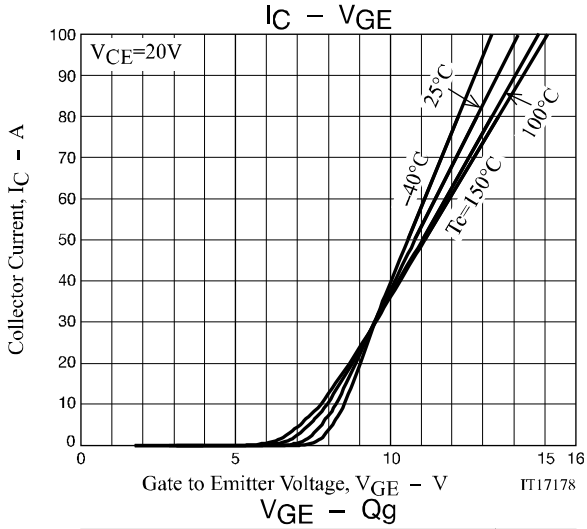

NGTG20N60L2TF1G

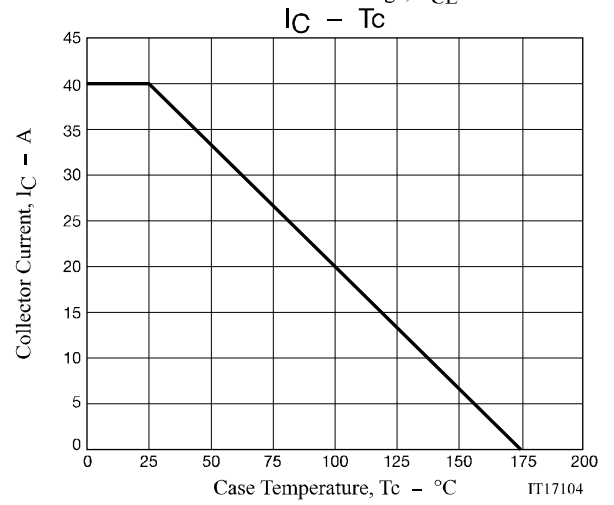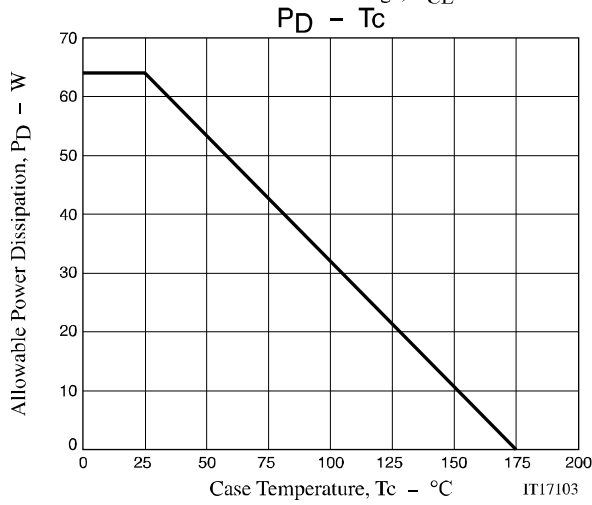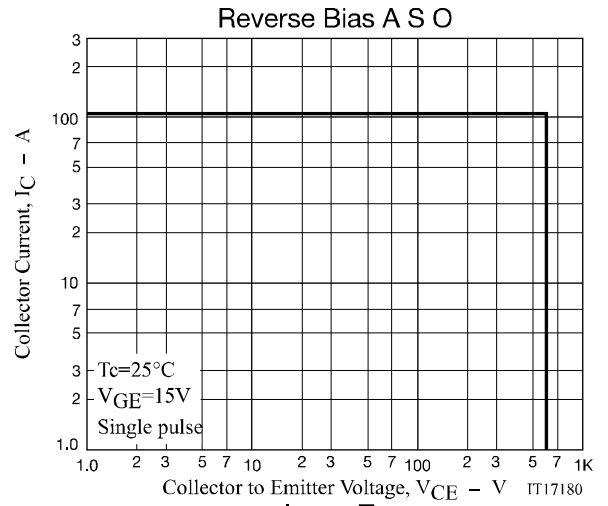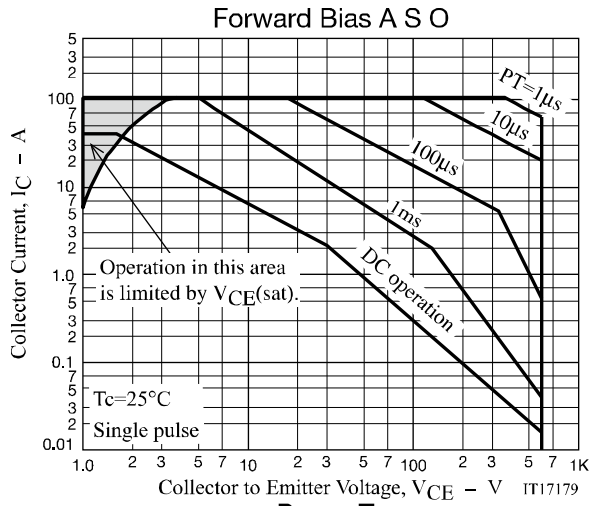


NGTG20N60L2TF1G

封装尺寸

单位: mm

TO-3PF-3L
CASE 340AH
ISSUE A

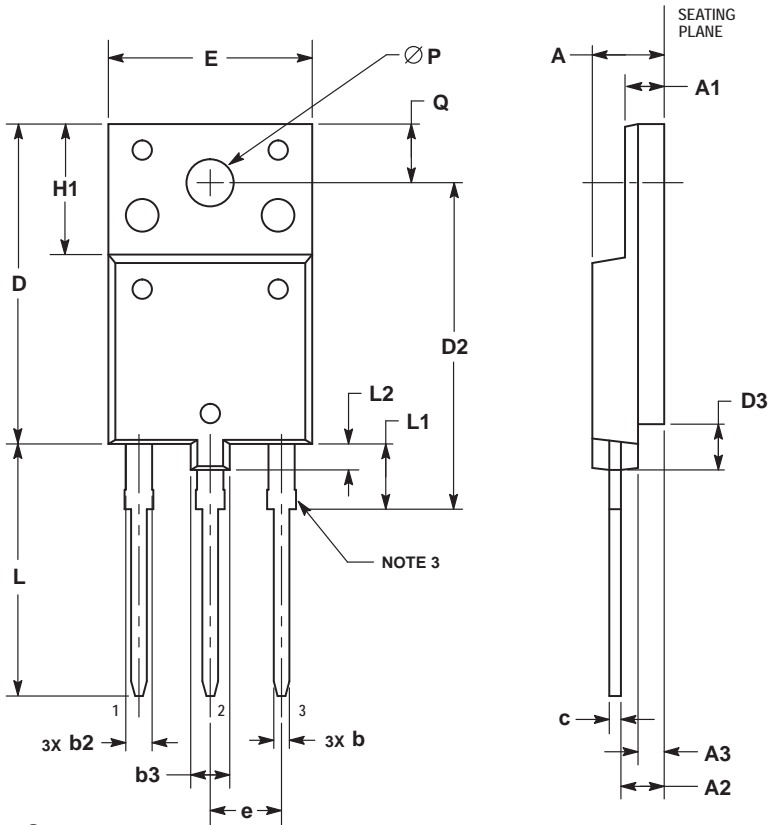

- 1 : Gate
- 2 : Collector
- 3 : Emitter

- NOTES:
1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
 2. CONTROLLING DIMENSION: MILLIMETERS.
 3. CONTOUR UNCONTROLLED IN THIS AREA (6 PLACES).
 4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH OR GATE PROTRUSIONS. MOLD FLASH AND GATE PROTRUSIONS NOT TO EXCEED 0.13 PER SIDE. THESE DIMENSIONS ARE TO BE MEASURED AT THE OUTERMOST EXTREME OF THE PLASTIC BODY.
 5. DIMENSION b2 DOES NOT INCLUDE DAMBAR PROTRUSION. LEAD WIDTH INCLUDING PROTRUSION SHALL NOT EXCEED 2.20.

DIM	MILLIMETERS	
	MIN	MAX
A	5.30	5.70
A1	2.80	3.20
A2	3.10	3.50
A3	1.80	2.20
b	0.65	0.95
b2	1.90	2.15
b3	3.80	4.20
c	0.80	1.10
D	24.30	24.70
D2	24.70	25.30
D3	3.30	3.70
E	15.30	15.70
e	5.35	5.55
H1	9.80	10.20
L	19.10	19.50
L1	4.80	5.20
L2	1.90	2.20
P	3.40	3.80
Q	4.30	4.70

ON Semiconductor and the ON logo are registered trademarks of Semiconductor Components Industries, LLC (SCILLC) or its subsidiaries in the United States and/or other countries. SCILLC owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of SCILLC's product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. SCILLC reserves the right to make changes without further notice to any products herein. SCILLC makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does SCILLC assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. "Typical" parameters which may be provided in SCILLC data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. SCILLC does not convey any license under its patent rights nor the rights of others. SCILLC products are not designed, intended, or authorized for use as components in systems intended for surgical implant into the body, or other applications intended to support or sustain life, or for any other application in which the failure of the SCILLC product could create a situation where personal injury or death may occur. Should Buyer purchase or use SCILLC products for any such unintended or unauthorized application, Buyer shall indemnify and hold SCILLC and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that SCILLC was negligent regarding the design or manufacture of the part. SCILLC is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.