


# Inverter with Schmitt-Trigger

## NL17SG14


The NL17SG14 is a single inverter with Schmitt-trigger input in tiny footprint packages. The device is designed to operate for  $V_{CC} = 0.9\text{ V}$  to  $3.6\text{ V}$ .

### Features


- Designed for  $0.9\text{ V}$  to  $3.6\text{ V}$   $V_{CC}$  Operation
- $2.4\text{ ns}$  (Typ) at  $V_{CC} = 3.0\text{ V}$ ,  $C_L = 15\text{ pF}$
- Inputs/Outputs Over-Voltage Tolerant up to  $3.6\text{ V}$
- $I_{OFF}$  Supports Partial Power Down Protection
- Available in UDFN Package
- Q Suffix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC-Q100 Qualified and PPAP Capable
- These Devices are Pb-Free, Halogen-Free/BFR-Free and RoHS-Compliant

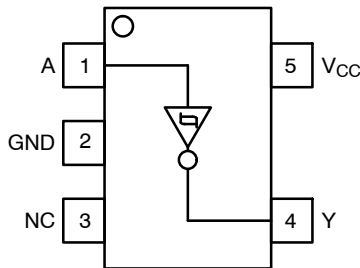


**Figure 1. SOT-953**  
(Top Thru View)

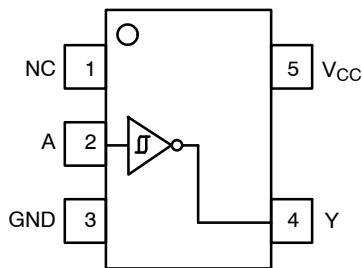

**Figure 2. SC-88A**  
(Top View)



**Figure 3. UDFN**  
(Top View)




**Figure 4. Logic Symbol**

### MARKING DIAGRAMS




**SOT-953**  
**CASE 527AE**




**UDFN6**  
**1.0 x 1.0**  
**CASE 517BX**



**UDFN6**  
**1.45 x 1.0**  
**CASE 517AQ**



**SC-88A**  
**DF SUFFIX**  
**CASE 419A**



M = Date Code\*  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*Date Code orientation and/or position may vary depending upon manufacturing location.

### PIN ASSIGNMENT

|   | SOT-953  | SC-88A   | UDFN6    |
|---|----------|----------|----------|
| 1 | A        | NC       | NC       |
| 2 | GND      | A        | A        |
| 3 | NC       | GND      | GND      |
| 4 | Y        | Y        | Y        |
| 5 | $V_{CC}$ | $V_{CC}$ | NC       |
| 6 |          |          | $V_{CC}$ |

### FUNCTION TABLE

| A Input | Y Output |
|---------|----------|
| L       | H        |
| H       | L        |

### ORDERING INFORMATION

See detailed ordering, marking and shipping information in the package dimensions section on page 6 of this data sheet.

NOTE: Some of the devices on this data sheet have been **DISCONTINUED**. Please refer to the table on page 6.

# NL17SG14

**Table 1. MAXIMUM RATINGS**

| Symbol                | Parameter                                                                                                         | Value                                                  | Unit |
|-----------------------|-------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------|------|
| $V_{CC}$              | DC Supply Voltage                                                                                                 | -0.5 to +4.3                                           | V    |
| $V_{IN}$              | DC Input Voltage                                                                                                  | -0.5 to +4.3                                           | V    |
| $V_{OUT}$             | DC Output Voltage Active-Mode (High or Low State)<br>Tri-State Mode (Note 1)<br>Power-Down Mode ( $V_{CC} = 0$ V) | -0.5 to $V_{CC} + 0.5$<br>-0.5 to +4.3<br>-0.5 to +4.3 | V    |
| $I_{IK}$              | DC Input Diode Current $V_{IN} < GND$                                                                             | -20                                                    | mA   |
| $I_{OK}$              | DC Output Diode Current $V_{OUT} < GND$                                                                           | -20                                                    | mA   |
| $I_{OUT}$             | DC Output Source/Sink Current                                                                                     | $\pm 20$                                               | mA   |
| $I_{CC}$ or $I_{GND}$ | DC Supply Current Per Supply Pin or Ground Pin                                                                    | $\pm 20$                                               | mA   |
| $T_{STG}$             | Storage Temperature Range                                                                                         | -65 to +150                                            | °C   |
| $T_L$                 | Lead Temperature, 1 mm from Case for 10 Seconds                                                                   | 260                                                    | °C   |
| $T_J$                 | Junction Temperature Under Bias                                                                                   | +150                                                   | °C   |
| $\theta_{JA}$         | Thermal Resistance (Note 2)                                                                                       | 154                                                    | °C/W |
| $P_D$                 | Power Dissipation in Still Air                                                                                    | 812                                                    | mW   |
| $\theta_{JA}$         | Thermal Resistance (Note 2) SC-88A<br>SOT-953<br>UDFN6                                                            | 377<br>254<br>154                                      | °C/W |
| $P_D$                 | Power Dissipation in Still Air SC-88A<br>SOT-953<br>UDFN6                                                         | 332<br>491<br>812                                      | mW   |
| MSL                   | Moisture Sensitivity                                                                                              | Level 1                                                |      |
| FR                    | Flammability Rating Oxygen Index: 28 to 34                                                                        | UL 94 V-0 @ 0.125 in                                   |      |
| $V_{ESD}$             | ESD Withstand Voltage (Note 3) Human Body Model<br>Charged Device Model                                           | 2000<br>1000                                           | V    |
| $I_{LATCHUP}$         | Latchup Performance (Note 4)                                                                                      | $\pm 100$                                              | mA   |

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Applicable to devices with outputs that may be tri-stated.
2. Measured with minimum pad spacing on an FR4 board, using 10 mm – by – 1 inch, 2 ounce copper trace no air flow per JESD51-7.
3. HBM tested to EIA / JESD22-A114-A. CDM tested to JESD22-C101-A. JEDEC recommends that ESD qualification to EIA/JESD22-A115A (Machine Model) be discontinued.
4. Tested to EIA/JESD78 Class II.

**Table 2. RECOMMENDED OPERATING CONDITIONS**

| Symbol     | Parameter                                                                                                      | Min         | Max                    | Unit |
|------------|----------------------------------------------------------------------------------------------------------------|-------------|------------------------|------|
| $V_{CC}$   | Positive DC Supply Voltage                                                                                     | 0.9         | 3.6                    | V    |
| $V_{IN}$   | Digital Input Voltage                                                                                          | 0           | 3.6                    | V    |
| $V_{OUT}$  | Output Voltage Active Mode (High or Low State)<br>Tri-State Mode (Note 1)<br>Power Down Mode ( $V_{CC} = 0$ V) | 0<br>0<br>0 | $V_{CC}$<br>3.6<br>3.6 | V    |
| $T_A$      | Operating Free-Air Temperature                                                                                 | -55         | +125                   | °C   |
| $t_r, t_f$ | Input Transition Rise or Fall Rate                                                                             | 0           | No Limit               | nS/V |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

Table 3. DC ELECTRICAL CHARACTERISTICS

| Symbol           | Parameter                              | Conditions                                                         | V <sub>CC</sub> (V) | T <sub>A</sub> = 25°C  |      |                        | T <sub>A</sub> = -55°C to +125°C |                        | Unit |
|------------------|----------------------------------------|--------------------------------------------------------------------|---------------------|------------------------|------|------------------------|----------------------------------|------------------------|------|
|                  |                                        |                                                                    |                     | Min                    | Typ  | Max                    | Min                              | Max                    |      |
| V <sub>T+</sub>  | Positive Going Input Threshold Voltage |                                                                    | 0.9                 | –                      | 0.7  | –                      | –                                | –                      | V    |
|                  |                                        |                                                                    | 1.1                 | –                      | 0.81 | 0.95                   | –                                | 0.95                   |      |
|                  |                                        |                                                                    | 1.4                 | –                      | 0.94 | 1.16                   | –                                | 1.16                   |      |
|                  |                                        |                                                                    | 1.65                | –                      | 1.06 | 1.3                    | –                                | 1.3                    |      |
|                  |                                        |                                                                    | 2.3                 | –                      | 1.36 | 1.73                   | –                                | 1.73                   |      |
|                  |                                        |                                                                    | 3.0                 | –                      | 1.8  | 2.24                   | –                                | 2.24                   |      |
| V <sub>T–</sub>  | Negative Going Input Threshold Voltage |                                                                    | 0.9                 | –                      | 0.23 | –                      | –                                | –                      | V    |
|                  |                                        |                                                                    | 1.1                 | 0.15                   | 0.33 | –                      | 0.15                             | –                      |      |
|                  |                                        |                                                                    | 1.4                 | 0.3                    | 0.47 | –                      | 0.3                              | –                      |      |
|                  |                                        |                                                                    | 1.65                | 0.35                   | 0.6  | –                      | 0.35                             | –                      |      |
|                  |                                        |                                                                    | 2.3                 | 0.55                   | 0.85 | –                      | 0.55                             | –                      |      |
|                  |                                        |                                                                    | 3.0                 | 0.95                   | 1.13 | –                      | 0.95                             | –                      |      |
| V <sub>H</sub>   | Hysteresis Voltage                     |                                                                    | 0.9                 | –                      | 0.27 | –                      | –                                | –                      | V    |
|                  |                                        |                                                                    | 1.1                 | 0.2                    | 0.35 | 0.8                    | 0.2                              | 0.8                    |      |
|                  |                                        |                                                                    | 1.4                 | 0.25                   | 0.41 | 0.86                   | 0.25                             | 0.86                   |      |
|                  |                                        |                                                                    | 1.65                | 0.30                   | 0.46 | 0.9                    | 0.30                             | 0.9                    |      |
|                  |                                        |                                                                    | 2.3                 | 0.40                   | 0.56 | 1.05                   | 0.40                             | 1.05                   |      |
|                  |                                        |                                                                    | 3.0                 | 0.49                   | 0.59 | 1.1                    | 0.49                             | 1.1                    |      |
| V <sub>OH</sub>  | High-Level Output Voltage              | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>               |                     |                        |      |                        |                                  |                        | V    |
|                  |                                        | I <sub>OH</sub> = –20 µA                                           | 0.9                 | –                      | 0.75 | –                      | –                                | –                      |      |
|                  |                                        | I <sub>OH</sub> = –0.3 mA                                          | 1.1 to 1.3          | 0.75 x V <sub>CC</sub> | –    | –                      | 0.75 x V <sub>CC</sub>           | –                      |      |
|                  |                                        | I <sub>OH</sub> = –1.7 mA                                          | 1.4 to 1.6          | 0.75 x V <sub>CC</sub> | –    | –                      | 0.75 x V <sub>CC</sub>           | –                      |      |
|                  |                                        | I <sub>OH</sub> = –3.0 mA                                          | 1.65 to 1.95        | V <sub>CC</sub> – 0.45 | –    | –                      | V <sub>CC</sub> – 0.45           | –                      |      |
|                  |                                        | I <sub>OH</sub> = –4.0 mA                                          | 2.3 to 2.7          | 2.0                    | –    | –                      | 2.0                              | –                      |      |
|                  |                                        | I <sub>OH</sub> = –8.0 mA                                          | 3.0 to 3.6          | 2.48                   | –    | –                      | 2.48                             | –                      |      |
| V <sub>OL</sub>  | Low-Level Output Voltage               | V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>               |                     |                        |      |                        |                                  |                        | V    |
|                  |                                        | I <sub>OL</sub> = 20 µA                                            | 0.9                 | –                      | 0.1  | –                      | –                                | –                      |      |
|                  |                                        | I <sub>OL</sub> = 0.3 mA                                           | 1.1 to 1.3          | –                      | –    | 0.25 x V <sub>CC</sub> | –                                | 0.25 x V <sub>CC</sub> |      |
|                  |                                        | I <sub>OL</sub> = 1.7 mA                                           | 1.4 to 1.6          | –                      | –    | 0.25 x V <sub>CC</sub> | –                                | 0.25 x V <sub>CC</sub> |      |
|                  |                                        | I <sub>OL</sub> = 3.0 mA                                           | 1.65 to 1.95        | –                      | –    | 0.45                   | –                                | 0.45                   |      |
|                  |                                        | I <sub>OL</sub> = 4.0 mA                                           | 2.3 to 2.7          | –                      | –    | 0.4                    | –                                | 0.4                    |      |
|                  |                                        | I <sub>OL</sub> = 8.0 mA                                           | 2.7 to 3.6          | –                      | –    | 0.4                    | –                                | 0.4                    |      |
| I <sub>IN</sub>  | Input Leakage Current                  | V <sub>IN</sub> = 0 V to 3.6 V                                     | 0.9 to 3.6          | –                      | –    | ±0.1                   | –                                | ±1.0                   | µA   |
| I <sub>OFF</sub> | Power Off Leakage Current              | V <sub>IN</sub> = 0 V to 3.6 V;<br>V <sub>OUT</sub> = 0 V to 3.6 V | 0                   | –                      | –    | 1.0                    | –                                | 10.0                   | µA   |
| I <sub>CC</sub>  | Quiescent Supply Current               | V <sub>IN</sub> = V <sub>CC</sub> or GND                           | 0.9 to 3.6          | –                      | –    | 0.5                    | –                                | 10.0                   | µA   |

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


Table 4. AC ELECTRICAL CHARACTERISTICS

| Symbol                                 | Parameter                                         | Test Condition                                   | V <sub>CC</sub> (V) | T <sub>A</sub> = 25°C |      |      | T <sub>A</sub> = -55°C to +125°C |      | Unit |
|----------------------------------------|---------------------------------------------------|--------------------------------------------------|---------------------|-----------------------|------|------|----------------------------------|------|------|
|                                        |                                                   |                                                  |                     | Min                   | Typ  | Max  | Min                              | Max  |      |
| t <sub>PLH</sub> ,<br>t <sub>PHL</sub> | Propagation Delay,<br>A to Y<br>(Figures 5 and 6) | C <sub>L</sub> = 10 pF,<br>R <sub>L</sub> = 1 MΩ | 0.9                 | –                     | 38.0 | –    | –                                | –    | ns   |
|                                        |                                                   |                                                  | 1.1 to 1.3          | –                     | 9.7  | 24.1 | –                                | 35.9 |      |
|                                        |                                                   |                                                  | 1.4 to 1.6          | –                     | 5.4  | 10.5 | –                                | 11.3 |      |
|                                        |                                                   |                                                  | 1.65 to 1.95        | –                     | 3.9  | 7.8  | –                                | 8.2  |      |
|                                        |                                                   |                                                  | 2.3 to 2.7          | –                     | 2.8  | 5.4  | –                                | 5.8  |      |
|                                        |                                                   |                                                  | 3.0 to 3.6          | –                     | 2.3  | 4.4  | –                                | 4.6  |      |
|                                        |                                                   | C <sub>L</sub> = 15 pF,<br>R <sub>L</sub> = 1 MΩ | 0.9                 | –                     | 38.4 | –    | –                                | –    |      |
|                                        |                                                   |                                                  | 1.1 to 1.3          | –                     | 9.9  | 25.1 | –                                | 41.6 |      |
|                                        |                                                   |                                                  | 1.4 to 1.6          | –                     | 5.6  | 11.5 | –                                | 12.6 |      |
|                                        |                                                   |                                                  | 1.65 to 1.95        | –                     | 4.1  | 8.4  | –                                | 8.7  |      |
|                                        |                                                   |                                                  | 2.3 to 2.7          | –                     | 2.9  | 5.7  | –                                | 6.1  |      |
|                                        |                                                   |                                                  | 3.0 to 3.6          | –                     | 2.4  | 4.6  | –                                | 5.0  |      |
|                                        |                                                   | C <sub>L</sub> = 30 pF,<br>R <sub>L</sub> = 1 MΩ | 0.9                 | –                     | 39.6 | –    | –                                | –    |      |
|                                        |                                                   |                                                  | 1.1 to 1.3          | –                     | 10.5 | 35.7 | –                                | 58.1 |      |
|                                        |                                                   |                                                  | 1.4 to 1.6          | –                     | 6.0  | 15.8 | –                                | 17.6 |      |
|                                        |                                                   |                                                  | 1.65 to 1.95        | –                     | 4.7  | 10.7 | –                                | 11.7 |      |
|                                        |                                                   |                                                  | 2.3 to 2.7          | –                     | 3.2  | 6.9  | –                                | 8.1  |      |
|                                        |                                                   |                                                  | 3.0 to 3.6          | –                     | 2.6  | 5.2  | –                                | 6.1  |      |

Table 5. CAPACITIVE CHARACTERISTICS

| Symbol           | Parameter                              | Test Condition                                                                         | Typical (T <sub>A</sub> = 25°C) | Unit |
|------------------|----------------------------------------|----------------------------------------------------------------------------------------|---------------------------------|------|
| C <sub>IN</sub>  | Input Capacitance                      | V <sub>CC</sub> = 0 V                                                                  | 3.0                             | pF   |
| C <sub>OUT</sub> | Output Capacitance                     | V <sub>CC</sub> = 0 V                                                                  | 3.0                             | pF   |
| C <sub>PD</sub>  | Power Dissipation Capacitance (Note 5) | f = 10 MHz, V <sub>CC</sub> = 0.9 V to 3.6 V, V <sub>IN</sub> = 0 V or V <sub>CC</sub> | 4.0                             | pF   |

5. C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the dynamic operating current consumption without load. Average operating current can be obtained by the equation I<sub>CC(OPR)</sub> = C<sub>PD</sub> • V<sub>CC</sub> • f<sub>in</sub> + I<sub>CC</sub>. C<sub>PD</sub> is used to determine the no-load dynamic power consumption: P<sub>D</sub> = C<sub>PD</sub> • V<sub>CC</sub><sup>2</sup> • f<sub>in</sub> + I<sub>CC</sub> • V<sub>CC</sub>.

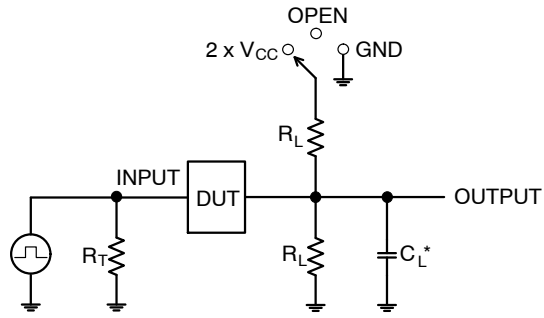

$C_L$  includes probe and jig capacitance  
 $R_T$  is  $Z_{OUT}$  of pulse generator (typically 50  $\Omega$ )  
 $f = 1$  MHz

Figure 5. Test Circuit

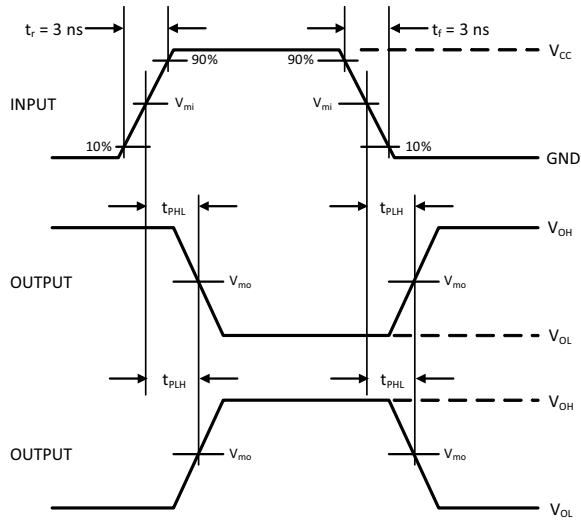


Figure 6. Switching Waveforms

| Test                | Switch Position   |
|---------------------|-------------------|
| $t_{PLH} / t_{PHL}$ | Open              |
| $t_{PLZ} / t_{PZL}$ | $2 \times V_{CC}$ |
| $t_{PHZ} / t_{PZH}$ | GND               |

| $V_{CC}, V$  | $V_{mi}, V$ | $V_{mo}, V$ | $V_Y, V$ |
|--------------|-------------|-------------|----------|
| 0.9          | $V_{CC}/2$  | $V_{CC}/2$  | 0.1      |
| 1.1 to 1.3   | $V_{CC}/2$  | $V_{CC}/2$  | 0.1      |
| 1.4 to 1.6   | $V_{CC}/2$  | $V_{CC}/2$  | 0.1      |
| 1.65 to 1.95 | $V_{CC}/2$  | $V_{CC}/2$  | 0.15     |
| 2.3 to 2.7   | $V_{CC}/2$  | $V_{CC}/2$  | 0.15     |
| 3.0 to 3.6   | 1.5         | 1.5         | 0.3      |

# NL17SG14


## ORDERING INFORMATION

| Device           | Package           | Marking            | Pin 1 Quadrant<br>(See below) | Shipping <sup>†</sup> |
|------------------|-------------------|--------------------|-------------------------------|-----------------------|
| NL17SG14DFT2G    | SC-88A            | AR                 | 3                             | 3000 / Tape & Reel    |
| NL17SG14DFT2G-Q* | SC-88A            | AR                 | 3                             | 3000 / Tape & Reel    |
| NL17SG14MU1TCG   | UDFN6, 1.45 x 1.0 | 4 (Rotated 180°CW) | 3                             | 3000 / Tape & Reel    |
| NL17SG14MU3TCG   | UDFN6, 1.0 x 1.0  | R                  | 2                             | 3000 / Tape & Reel    |
| NL17SG14P5T5G    | SOT-953           | 2                  | 2                             | 8000 / Tape & Reel    |

<sup>†</sup>For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

\*-Q Suffix for Automotive and Other Applications Requiring Unique Site and Control Change Requirements; AEC – Q100 Qualified and PPAP Capable.


## Pin 1 Orientation in Tape and Reel

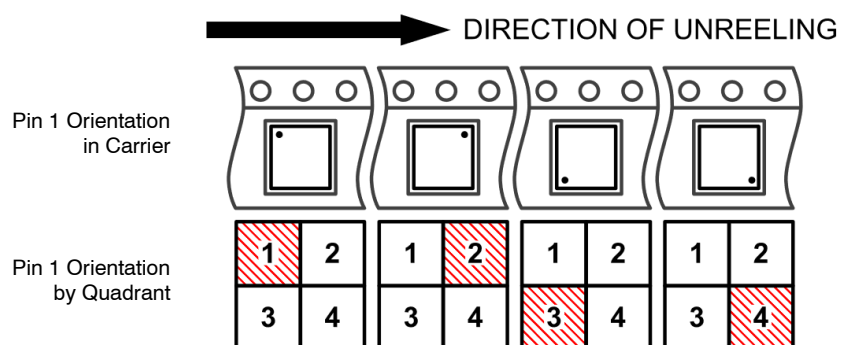

# NL17SG14

## PACKAGE DIMENSIONS

UDFN6, 1x1, 0.35P  
CASE 517BX  
ISSUE O

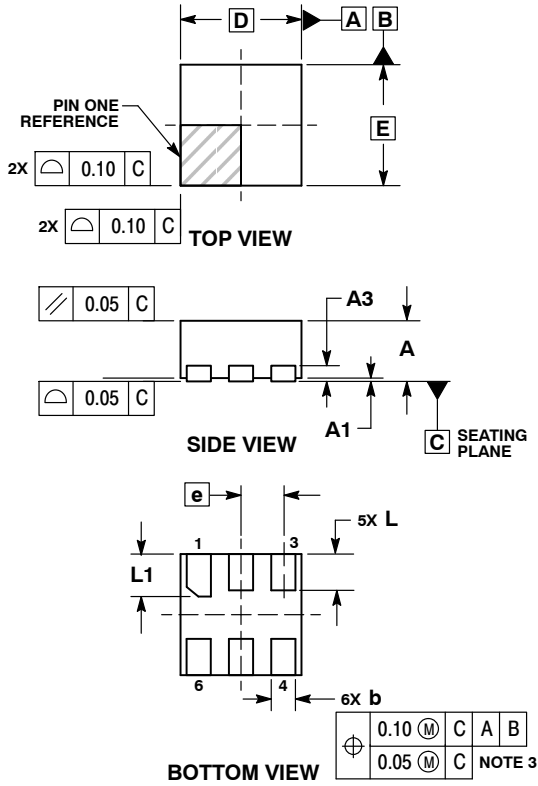


### NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.20 MM FROM TERMINAL TIP.
4. PACKAGE DIMENSIONS EXCLUSIVE OF BURRS AND MOLD FLASH.

| DIM | MILLIMETERS |      |
|-----|-------------|------|
|     | MIN         | MAX  |
| A   | 0.45        | 0.55 |
| A1  | 0.00        | 0.05 |
| A3  | 0.13        | REF  |
| b   | 0.12        | 0.22 |
| D   | 1.00        | BSC  |
| E   | 1.00        | BSC  |
| e   | 0.35        | BSC  |
| L   | 0.25        | 0.35 |
| L1  | 0.30        | 0.40 |

### RECOMMENDED SOLDERING FOOTPRINT\*

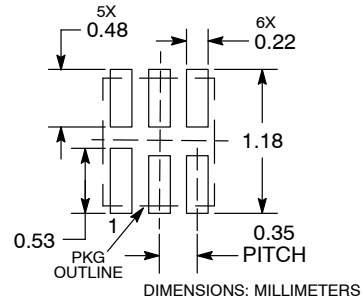



\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.



SCALE 2:1

**SC-88A (SC-70-5/SOT-353)**  
CASE 419A-02  
ISSUE M

DATE 11 APR 2023


**RECOMMENDED  
MOUNTING FOOTPRINT**

\* For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

**NOTES:**

1. DIMENSIONING AND TOLERANCING PER ANSI Y14.5M, 1982.
2. CONTROLLING DIMENSION: MILLIMETERS
3. 419A-01 OBSOLETE. NEW STANDARD 419A-02
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS. MOLD FLASH, PROTRUSIONS, OR GATE BURRS SHALL NOT EXCEED 0.1016MM PER SIDE.

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.80        | 0.95 | 1.10 |
| A1  | ---         | ---  | 0.10 |
| A3  | 0.20 REF    |      |      |
| b   | 0.10        | 0.20 | 0.30 |
| c   | 0.10        | ---  | 0.25 |
| D   | 1.80        | 2.00 | 2.20 |
| E   | 2.00        | 2.10 | 2.20 |
| E1  | 1.15        | 1.25 | 1.35 |
| e   | 0.65 BSC    |      |      |
| L   | 0.10        | 0.15 | 0.30 |

**GENERIC MARKING  
DIAGRAM\***


\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.

XXX = Specific Device Code

M = Date Code

▪ = Pb-Free Package

(Note: Microdot may be in either location)

**STYLE 1:**

- PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR
5. COLLECTOR

**STYLE 2:**

- PIN 1. ANODE
2. EMITTER
3. BASE
4. COLLECTOR
5. CATHODE

**STYLE 3:**

- PIN 1. ANODE 1
2. N/C
3. ANODE 2
4. CATHODE 2
5. CATHODE 1

**STYLE 4:**

- PIN 1. SOURCE 1
2. DRAIN 1/2
3. SOURCE 1
4. GATE 1
5. GATE 2

**STYLE 5:**

- PIN 1. CATHODE
2. COMMON ANODE
3. CATHODE 2
4. CATHODE 3
5. CATHODE 4

**STYLE 6:**

- PIN 1. EMITTER 2
2. BASE 2
3. EMITTER 1
4. COLLECTOR
5. COLLECTOR 2/BASE 1

**STYLE 7:**

- PIN 1. BASE
2. EMITTER
3. BASE
4. COLLECTOR
5. COLLECTOR

**STYLE 8:**

- PIN 1. CATHODE
2. COLLECTOR
3. N/C
4. BASE
5. EMITTER

**STYLE 9:**

- PIN 1. ANODE
2. CATHODE
3. ANODE
4. ANODE
5. ANODE

Note: Please refer to datasheet for style callout. If style type is not called out in the datasheet refer to the device datasheet pinout or pin assignment.

|                         |                                 |                                                                                                                                                                                  |
|-------------------------|---------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98ASB42984B</b>              | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SC-88A (SC-70-5/SOT-353)</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |




onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.



SCALE 4:1

**UDFN6, 1.45x1.0, 0.5P**  
CASE 517AQ  
ISSUE O


DATE 15 MAY 2008

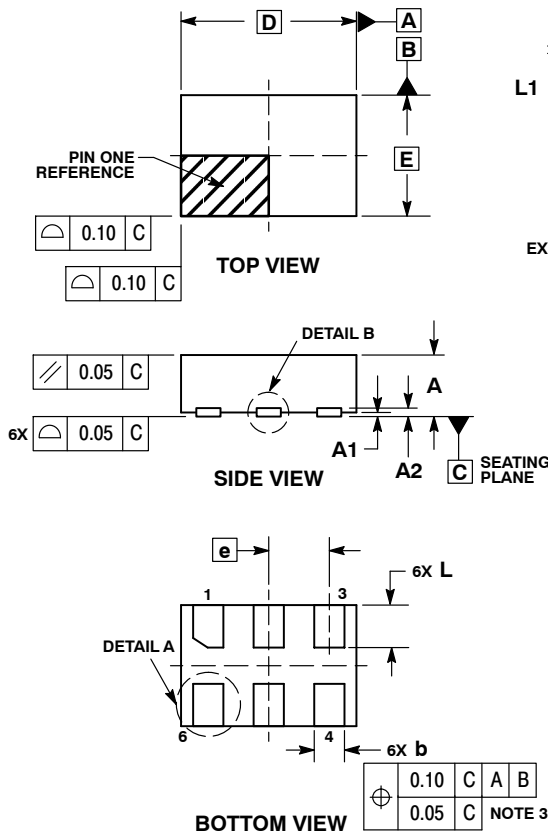
**DETAIL A**  
OPTIONAL  
CONSTRUCTIONS

**DETAIL B**  
OPTIONAL  
CONSTRUCTIONS

## NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 1994.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. DIMENSION b APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 mm FROM THE TERMINAL TIP.

| MILLIMETERS |          |      |
|-------------|----------|------|
| DIM         | MIN      | MAX  |
| A           | 0.45     | 0.55 |
| A1          | 0.00     | 0.05 |
| A2          | 0.07 REF |      |
| b           | 0.20     | 0.30 |
| D           | 1.45 BSC |      |
| E           | 1.00 BSC |      |
| e           | 0.50 BSC |      |
| L           | 0.30     | 0.40 |
| L1          | ---      | 0.15 |

**MOUNTING FOOTPRINT**


DIMENSIONS: MILLIMETERS

\*For additional information on our Pb-Free strategy and soldering details, please download the **onsemi** Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

**GENERIC**  
**MARKING DIAGRAM\***


X = Specific Device  
Code

M = Date Code

\*This information is generic. Please refer to device data sheet for actual part marking.  
Pb-Free indicator, "G" or microdot "▪", may or may not be present.

|                         |                              |                                                                                                                                                                                     |
|-------------------------|------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON30313E</b>           | Electronic versions are uncontrolled except when accessed directly from the Document Repository.<br>Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>UDFN6, 1.45x1.0, 0.5P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                                  |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.




**SOT-953 1.00x0.80x0.37, 0.35P**  
**CASE 527AE**  
**ISSUE F**


DATE 17 JAN 2024

**NOTES:**


1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2018.
2. CONTROLLING DIMENSION: MILLIMETERS.
3. MAXIMUM LEAD THICKNESS INCLUDES LEAD FINISH. MINIMUM LEAD THICKNESS IS THE MINIMUM THICKNESS OF THE BASE MATERIAL.
4. DIMENSIONS D AND E DO NOT INCLUDE MOLD FLASH, PROTRUSIONS, OR GATE BURRS.

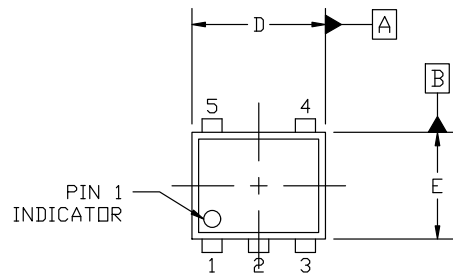

TOP VIEW




SIDE VIEW

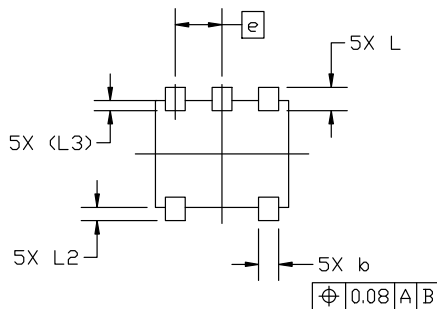

BOTTOM VIEW


**GENERIC MARKING DIAGRAM\***



X = Specific Device Code  
M = Month Code

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "•", may or may not be present. Some products may not follow the Generic Marking.

| MILLIMETERS |             |       |       |
|-------------|-------------|-------|-------|
| DIM         | MIN         | NOM   | MAX   |
| A           | 0.34        | 0.37  | 0.40  |
| b           | 0.10        | 0.15  | 0.20  |
| C           | 0.07        | 0.12  | 0.17  |
| D           | 0.95        | 1.00  | 1.05  |
| E           | 0.75        | 0.80  | 0.85  |
| e           | 0.35 BSC    |       |       |
| H           | 0.95        | 1.00  | 1.05  |
| L           | 0.125       | 0.175 | 0.225 |
| L2          | 0.05        | 0.10  | 0.15  |
| L3          | 0.075 (REF) |       |       |

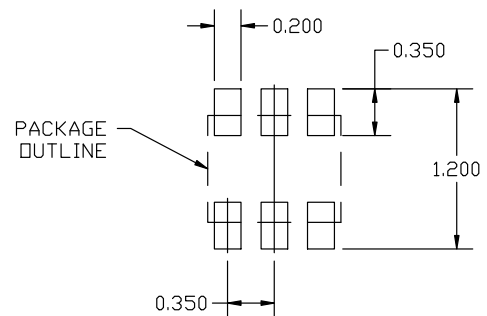

**RECOMMENDED MOUNTING FOOTPRINT**

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                         |                                      |                                                                                                                                                                                  |
|-------------------------|--------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>DOCUMENT NUMBER:</b> | <b>98AON26457D</b>                   | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| <b>DESCRIPTION:</b>     | <b>SOT-953 1.00x0.80x0.37, 0.35P</b> | <b>PAGE 1 OF 1</b>                                                                                                                                                               |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)