Si/SiC Hybrid Module – EliteSiC, Split T-Type NPC Inverter, Q2 Package

NXH200T120H3Q2F2STNG

The NXH200T120H3Q2F2STNG is a power module containing a split T−type neutral point clamped three−level inverter. The integrated field stop trench IGBTs and SiC Diodes provide lower conduction losses and switching losses, enabling designers to achieve high efficiency and superior reliability.

Features

- Split T−type Neutral Point Clamped Three−level Inverter Module
- 1200 V Ultra Field Stop IGBTs & 650 V FS4 IGBTs
- 650 V SiC Diodes
- Low Inductive Layout
- Solderable Pins
- Thermistor
- Pre−applied Thermal Interface Material (TIM) (optional)
- Nickel Plated DBC

Typical Applications

- Solar Inverters
- Uninterruptible Power Supplies

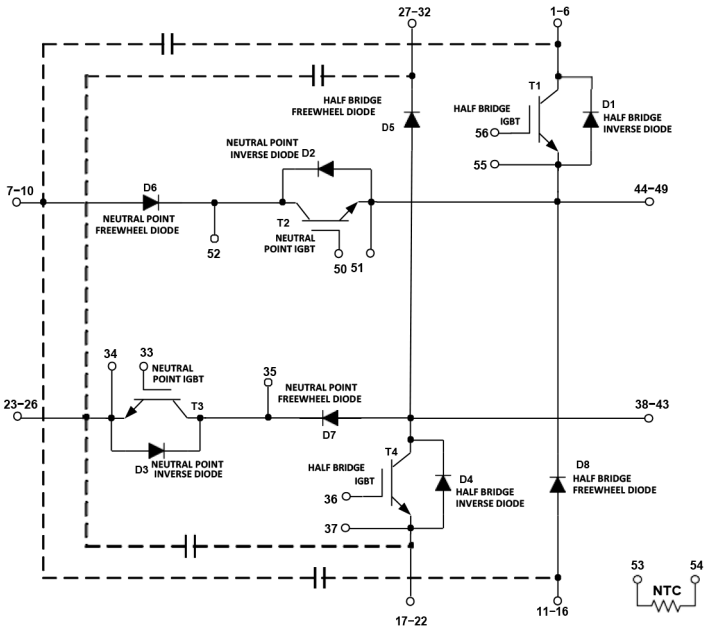

Figure 1. NXH200T120H3Q2F2STNG Schematic Diagram



PIM56, 93x47 (SOLDER PIN)
CASE 180AK

MARKING DIAGRAM



NXH200T120H3Q2F2Sxxx	= Device Code
YYWW	= Year and Work Week Code
A	= Assembly Site Code
T	= Test Side Code
G	= Pb−Free Package

PIN CONNECTIONS

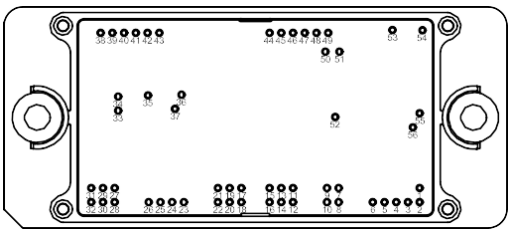

ORDERING INFORMATION

See detailed ordering and shipping information on page 6 of this data sheet.

© Semiconductor Components Industries, LLC, 2021

Table 1. ABSOLUTE MAXIMUM RATINGS (Note 1) (T_J = 25°C unless otherwise noted)

Rating	Symbol	Value	Unit
HALF BRIDGE IGBT			
Collector−Emitter Voltage	V_{CES}	1200	V
Gate−Emitter Voltage	V_{GE}	±20	V
Continuous Collector Current @ T_C = 25°C	I_C	330	A
Continuous Collector Current @ T_C = 80°C (T_J = 175°C)		256	
Pulsed Collector Current (T_J = 175°C)	I_{Cpulse}	768	A
Maximum Power Dissipation @ T_C = 80°C (T_J = 175°C)	P_{tot}	679	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C
NEUTRAL POINT IGBT			
Collector−Emitter Voltage	V_{CES}	650	V
Gate−Emitter Voltage	V_{GE}	±20	V
Continuous Collector Current @ T_C = 80°C (T_J = 175°C)	I_C	128	A
Pulsed Collector Current (T_J = 175°C)	I_{Cpulse}	384	A
Maximum Power Dissipation @ T_C = 80°C (T_J = 175°C)	P_{tot}	264	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C
HALF BRIDGE FREEWHEEL DIODE			
Peak Repetitive Reverse Voltage	V_{RRM}	1200	V
Continuous Forward Current @ T_C = 80°C (T_J = 175°C)	I_F	94	A
Repetitive Peak Forward Current (T_J = 175°C, t_p limited by T_{Jmax})	I_{FRM}	282	A
Maximum Power Dissipation @ T_C = 80°C (T_J = 175°C)	P_{tot}	232	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C
HALF BRIDGE INVERSE DIODE			
Peak Repetitive Reverse Voltage	V_{RRM}	1200	V
Continuous Forward Current @ T_C = 80°C (T_J = 175°C)	I_F	18	A
Repetitive Peak Forward Current (T_J = 175°C, t_p limited by T_{Jmax})	I_{FRM}	54	A
Maximum Power Dissipation @ T_C = 80°C (T_J = 175°C)	P_{tot}	62	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C
NEUTRAL POINT FREEWHEEL DIODE			
Peak Repetitive Reverse Voltage	V_{RRM}	650	V
Continuous Forward Current @ T_C = 80°C (T_J = 175°C)	I_F	75	A
Repetitive Peak Forward Current (T_J = 175°C, t_p limited by T_{Jmax})	I_{FRM}	225	A
Maximum Power Dissipation @ T_C = 80°C (T_J = 175°C)	P_{tot}	216	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C

Table 1. ABSOLUTE MAXIMUM RATINGS (Note 1) (T_J = 25°C unless otherwise noted) (continued)

Rating	Symbol	Value	Unit
NEUTRAL POINT INVERSE DIODE			
Peak Repetitive Reverse Voltage	V_{RRM}	650	V
Continuous Forward Current @ T_C = 80°C (T_J = 175°C)	I_F	36	A
Repetitive Peak Forward Current (T_J = 175°C, t_p limited by T_{Jmax})	I_{FRM}	108	A
Maximum Power Dissipation @ T_C = 80°C (T_J = 175°C)	P_{tot}	90	W
Minimum Operating Junction Temperature	T_{JMIN}	−40	°C
Maximum Operating Junction Temperature	T_{JMAX}	175	°C
THERMAL PROPERTIES			
Storage Temperature range	T_{stg}	−40 to 125	°C
INSULATION PROPERTIES			
Isolation Test Voltage, t = 2 sec, 50 Hz	V_{is}	4000	V_{RMS}
Creepage Distance		12.7	mm

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

1. Refer to ELECTRICAL CHARACTERISTICS, RECOMMENDED OPERATING RANGES and/or APPLICATION INFORMATION for Safe Operating parameters.

Table 2. RECOMMENDED OPERATING RANGES

Rating	Symbol	Min	Max	Unit
Module Operating Junction Temperature	T_J	−40	(T_{Jmax} −25)	°C

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied. Extended exposure to stresses beyond the Recommended Operating Ranges limits may affect device reliability.

Table 3. ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
HALF BRIDGE IGBT CHARACTERISTICS						
Collector−Emitter Cutoff Current	V_{GE} = 0 V, V_{CE} = 1200 V	I_{CES}	–	–	500	μA
Collector−Emitter Saturation Voltage	V_{GE} = 15 V, I_C = 200 A, T_J = 25°C	$V_{CE(sat)}$	1.40	1.86	2.30	V
	V_{GE} = 15 V, I_C = 200 A, T_J = 175°C		–	2.00	–	
Gate−Emitter Threshold Voltage	V_{GE} = V_{CE}, I_C = 6 mA	$V_{GE(TH)}$	4.80	5.52	6.50	V
Gate Leakage Current	V_{GE} = 20 V, V_{CE} = 0 V	I_{GES}	–	–	500	nA
Breakdown Voltage	V_{GE} = 0 V, I_C = 1 mA	B_{VCES}	1200	1400	1450	V
Turn−on Delay Time	T_J = 25°C V_{CE} = 350 V, I_C = 170 A, V_{GE} = −5/+15 V, R_G = 10 Ω	$t_{d(on)}$	–	302	–	ns
Rise Time		t_r	–	102	–	
Turn−off Delay Time		$t_{d(off)}$	–	923	–	
Fall Time		t_f	–	59	–	
Turn−on Switching Loss per Pulse		E_{on}	–	5.1	–	mJ
Turn−off Switching Loss per Pulse		E_{off}	–	5.4	–	

Table 3. ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (continued)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
HALF BRIDGE IGBT CHARACTERISTICS						
Turn−on Delay Time	T_J = 125°C V_{CE} = 350 V, I_C = 170 A, V_{GE} = −5/+15 V, R_G = 10 Ω	$t_{d(on)}$	–	276	–	ns
Rise Time		t_r	–	97	–	
Turn−off Delay Time		$t_{d(off)}$	–	997	–	
Fall Time		t_f	–	99	–	
Turn−on Switching Loss per Pulse		E_{on}	–	5.4	–	mJ
Turn−off Switching Loss per Pulse		E_{off}	–	7.9	–	
Input Capacitance	V_{CE} = 25 V, V_{GE} = 0 V f = 100 kHz	C_{ies}	–	35615	–	pF
Output Capacitance		C_{oes}	–	700	–	
Reverse Transfer Capacitance		C_{res}	–	530	–	
Total Gate Charge	V_{CE} = 600 V, I_C = 200 A, V_{GE} = 15 V	Q_g	–	1706.4	–	nC
Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness < 100 μm, λ = 2.87 W/mK	R_{thJH}	–	0.21	–	°C/W
Thermal Resistance − chip−to−case		R_{thJC}	–	0.14	–	°C/W
NEUTRAL POINT FREEWHEEL DIODE CHARACTERISTICS						
Diode Reverse Leakage Current	V_R = 650 V	I_R	–	–	100	μA
Diode Forward Voltage	I_F = 100 A, T_J = 25°C	V_F	1.2	1.48	2.7	V
	I_F = 100 A, T_J = 175°C		–	1.90	–	
Reverse Recovery Time	T_J = 25°C V_{CE} = 350 V, I_C = 170 A, V_{GE} = −5/+15 V, R_G = 10 Ω	t_{rr}	–	26.6	–	ns
Reverse Recovery Charge		Q_{rr}	–	308	–	nC
Peak Reverse Recovery Current		I_{RRM}	–	16.8	–	A
Peak Rate of Fall of Recovery Current		di/dt	–	1659	–	A/μs
Reverse Recovery Energy		E_{rr}	–	34.5	–	μJ
Reverse Recovery Time	T_J = 125°C V_{CE} = 350 V, I_C = 170 A V_{GE} = −5/+15V, R_G = 10 Ω	t_{rr}	–	25.8	–	ns
Reverse Recovery Charge		Q_{rr}	–	294	–	nC
Peak Reverse Recovery Current		I_{RRM}	–	18.0	–	A
Peak Rate of Fall of Recovery Current		di/dt	–	1672	–	A/μs
Reverse Recovery Energy		E_{rr}	–	35.2	–	μJ
Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness < 100 μm, λ = 2.87 W/mK	R_{thJH}	–	0.66	–	°C/W
Thermal Resistance − chip−to−case		R_{thJC}	–	0.55	–	°C/W
NEUTRAL POINT IGBT CHARACTERISTICS						
Collector−Emitter Cutoff Current	V_{GE} = 0 V, V_{CE} = 650 V	I_{CES}	–	–	300	μA
Collector−Emitter Saturation Voltage	V_{GE} = 15 V, I_C = 150 A, T_J = 25°C	$V_{CE(sat)}$	0.8	1.36	2.05	V
	V_{GE} = 15 V, I_C = 150 A, T_J = 175°C		–	1.50	–	
Gate−Emitter Threshold Voltage	V_{GE} = V_{CE}, I_C = 1.2 mA	$V_{GE(TH)}$	3.5	4.03	6.4	V
Gate Leakage Current	V_{GE} = 20 V, V_{CE} = 0 V	I_{GES}	–	–	300	nA
Breakdown Voltage	V_{GE} = 0 V, I_C = 1 mA	B_{VCES}	650	–	–	V

Table 3. ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (continued)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
NEUTRAL POINT IGBT CHARACTERISTICS						
Turn−on Delay Time	T_J = 25°C V_{CE} = 350 V, I_C = 170 A, V_{GE} = −5/+15 V, R_G = 10 Ω	$t_{d(on)}$	–	94	–	ns
Rise Time		t_r	–	45	–	
Turn−off Delay Time		$t_{d(off)}$	–	224	–	
Fall Time		t_f	–	22	–	
Turn−on Switching Loss per Pulse		E_{on}	–	3.1	–	mJ
Turn off Switching Loss per Pulse		E_{off}	–	2.4	–	
Turn−on Delay Time	T_J = 125°C V_{CE} = 350 V, I_C = 170 A, V_{GE} = −5/+15 V, R_G = 10 Ω	$t_{d(on)}$	–	92	–	ns
Rise Time		t_r	–	51	–	
Turn−off Delay Time		$t_{d(off)}$	–	244	–	
Fall Time		t_f	–	19	–	
Turn−on Switching Loss per Pulse		E_{on}	–	4.7	–	mJ
Turn off Switching Loss per Pulse		E_{off}	–	3.0	–	
Input Capacitance	V_{CE} = 25 V, V_{GE} = 0 V, f = 100 kHz	C_{ies}	–	9316	–	pF
Output Capacitance		C_{oes}	–	249	–	
Reverse Transfer Capacitance		C_{res}	–	34	–	
Total Gate Charge	V_{CE} = 480 V, I_C = 80 A, V_{GE} = 15 V	Q_g	–	300.9	–	nC
Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness < 100 μm, λ = 2.87 W/mK	R_{thJH}	–	0.50	–	°C/W
Thermal Resistance − chip−to−case		R_{thJC}	–	0.37	–	°C/W
HALF BRIDGE FREEWHEEL DIODE CHARACTERISTICS						
Diode Reverse Leakage Current	V_R = 1200 V	I_R	–	–	100	μA
Diode Forward Voltage	I_F =150 A, T_J = 25°C	V_F	1.6	2.71	3.6	V
	I_F = 150 A, T_J = 175°C		–	2.00	–	
Reverse Recovery Time	T_J = 25°C V_{CE} = 350 V, I_C = 170 A V_{GE} = −5/+15 V, R_G = 10 Ω	trr	–	62	–	ns
Reverse Recovery Charge		Qrr	–	4700	–	nC
Peak Reverse Recovery Current		IRRM	–	144	–	A
Peak Rate of Fall of Recovery Current		di/dt	–	4017	–	A/μs
Reverse Recovery Energy		Err	–	849	–	μJ
Reverse Recovery Time	T_J = 125°C V_{CE} = 350 V, I_C = 170 A V_{GE} = −5/+15 V, R_G = 10 Ω	trr	–	107	–	ns
Reverse Recovery Charge		Qrr	–	12510	–	nC
Peak Reverse Recovery Current		IRRM	–	216	–	A
Peak Rate of Fall of Recovery Current		di/dt	–	3815	–	A/μs
Reverse Recovery Energy		Err	–	2647	–	μJ
Thermal Resistance − chip−to−heatsink	Thermal grease, Thickness < 100 μm, λ = 2.87 W/mK	R_{thJH}	–	0.49	–	°C/W
Thermal Resistance − chip−to−case		R_{thJC}	–	0.38	–	°C/W

Table 3. ELECTRICAL CHARACTERISTICS (T_J = 25°C unless otherwise noted) (continued)

Parameter	Test Conditions	Symbol	Min	Typ	Max	Unit
HALF BRIDGE INVERSE DIODE CHARACTERISTICS						
Diode Forward Voltage	I_F = 7 A, T_J = 25°C	V_F	1.05	1.93	2.80	V
	I_F = 7 A, T_J = 175°C		–	1.29	–	
Thermal Resistance – chip–to–heatsink	Thermal grease, Thickness < 100 μm, λ = 2.87 W/mK	R_{thJH}	–	1.35	–	°C/W
Thermal Resistance – chip–to–case		R_{thJC}	–	1.24	–	°C/W
NEUTRAL POINT INVERSE DIODE CHARACTERISTICS						
Diode Forward Voltage	I_F = 30 A, T_J = 25°C	V_F	1.3	2.35	3.2	V
	I_F = 30 A, T_J = 175°C		–	1.50	–	
Thermal Resistance – chip–to–heatsink	Thermal grease, Thickness 100 μm, λ = 2.87 W/mK	R_{thJH}	–	1.03	–	°C/W
Thermal Resistance – chip–to–case		R_{thJC}	–	0.91	–	°C/W
THERMISTOR CHARACTERISTICS						
Nominal resistance		R_{25}	–	22	–	kQ
Nominal resistance	T = 100°C	R_{100}	–	1486	–	Q
Deviation of R25		R/R	–5	–	5	%
Power dissipation		P_D	–	200	–	mW
Power dissipation constant			–	2	–	mW/K
B–value	B(25/50), tolerance ±3%		–	3950	–	K
B–value	B(25/100), tolerance ±3%		–	3998	–	K

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

ORDERING INFORMATION

Device	Marking	Package	Shipping
NXH200T120H3Q2F2STNG	NXH200T120H3Q2F2STNG	Q2PACK – Case 180AK with pre–applied thermal interface material (TIM) (Pb–Free and Halide–Free)	12 Units / Blister Tray

TYPICAL CHARACTERISTICS – HALF BRIDGE IGBT AND NEUTRAL POINT DIODE

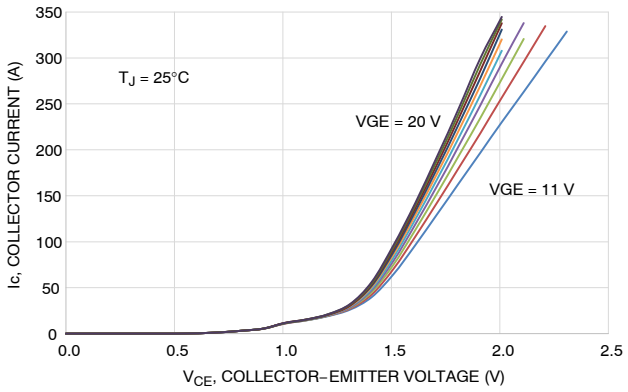

Figure 2. Typical Output Characteristics

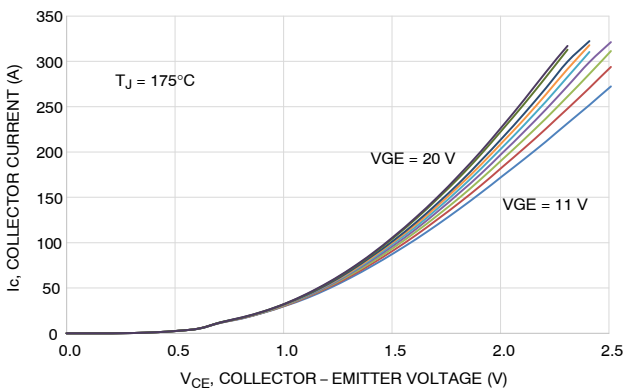

Figure 3. Typical Output Characteristics

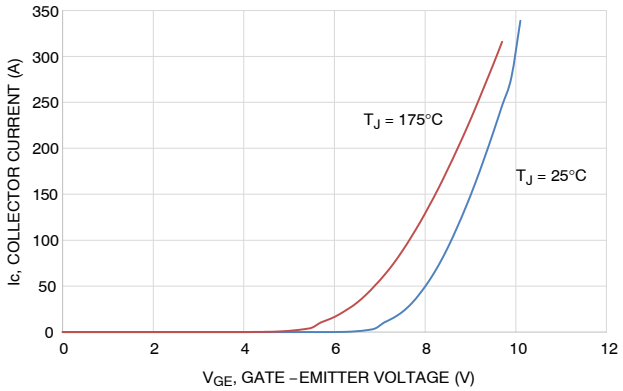

Figure 4. Typical Transfer Characteristics

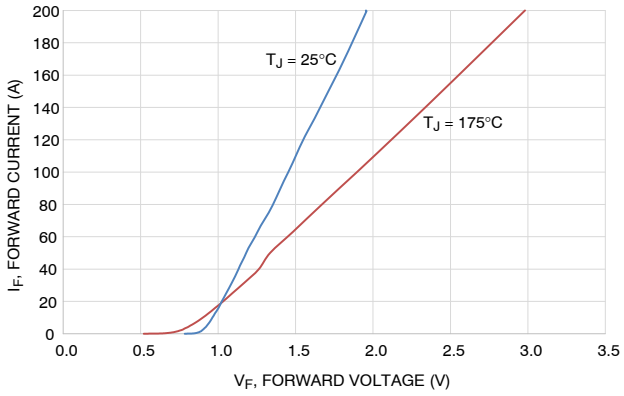

Figure 5. Typical Diode Forward Characteristics

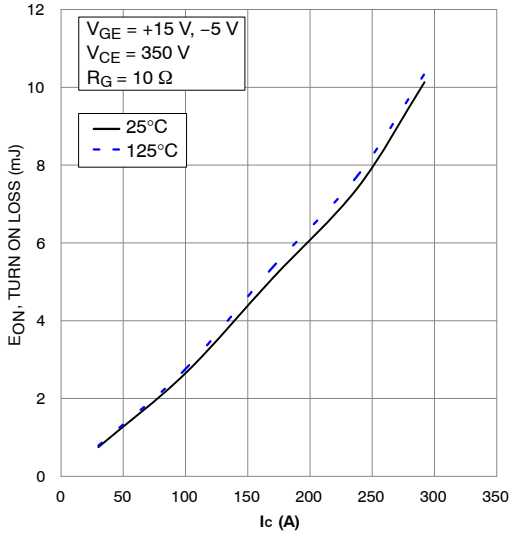

Figure 6. Typical Turn ON Loss vs. I_C

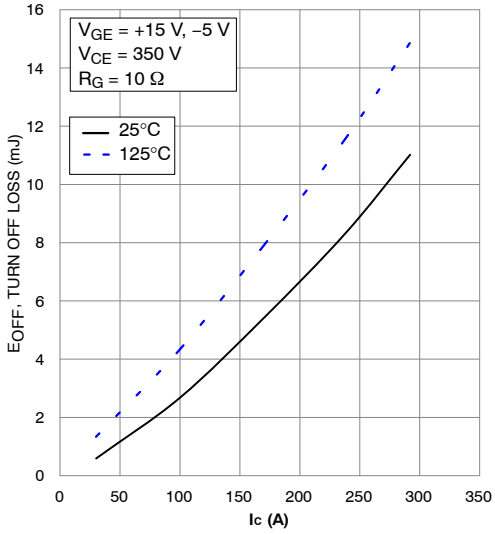

Figure 7. Typical Turn OFF Loss vs. I_C

TYPICAL CHARACTERISTICS – HALF BRIDGE IGBT AND NEUTRAL POINT DIODE

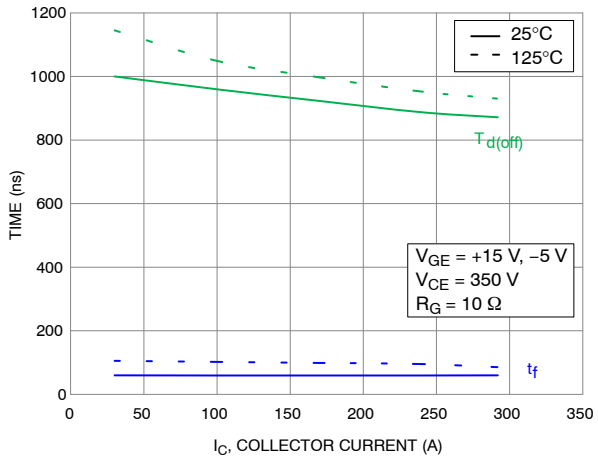

Figure 8. Typical Turn−Off Switching Time vs. I_C

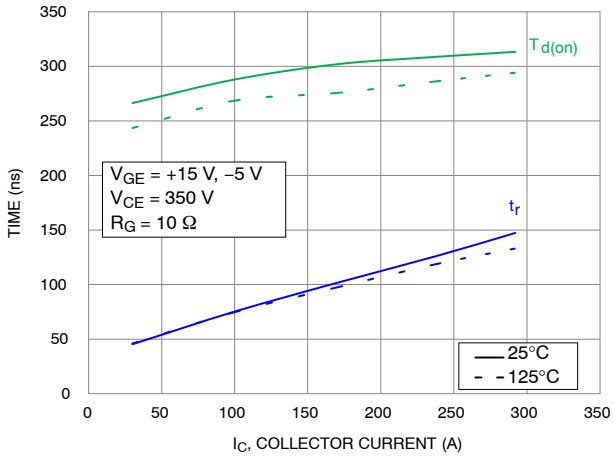

Figure 9. Typical Turn−On Switching Time vs. I_C

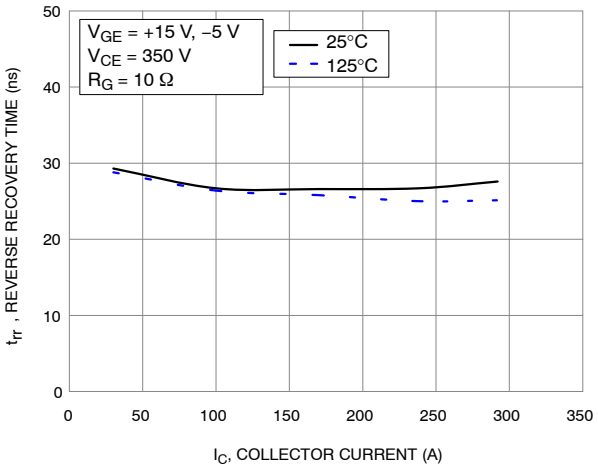

Figure 10. Typical Reverse Recovery Time vs. I_C

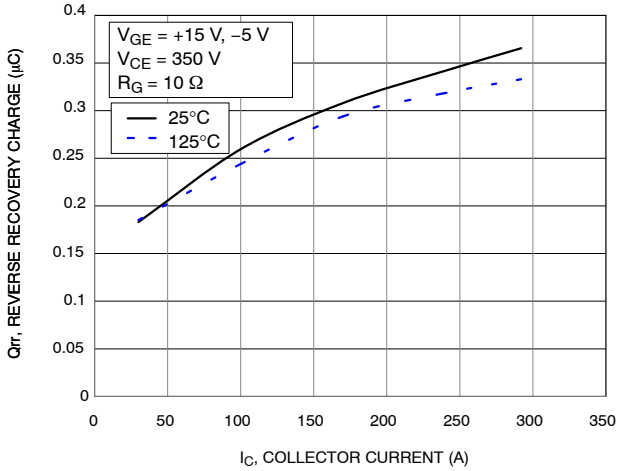

Figure 11. Typical Reverse Recovery Charge vs. I_C

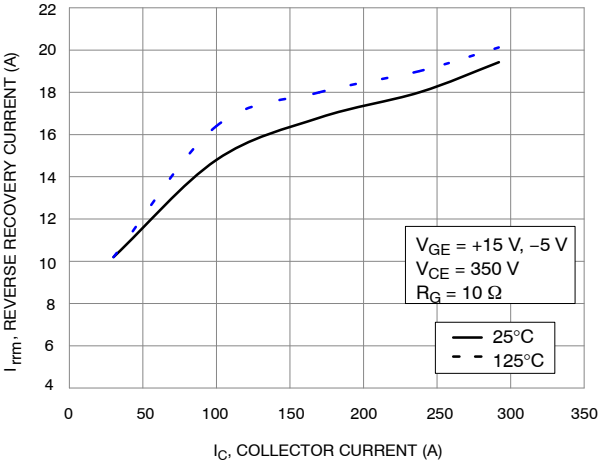

Figure 12. Typical Reverse Recovery Peak Current vs. I_C

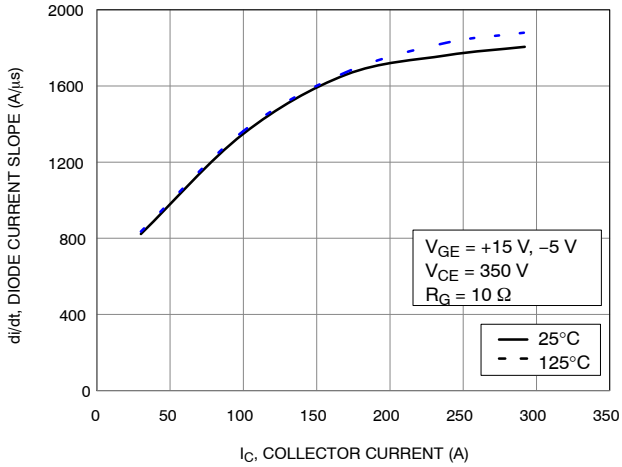

Figure 13. Typical Diode Current Slope vs. I_C

TYPICAL CHARACTERISTICS – HALF BRIDGE IGBT AND NEUTRAL POINT DIODE

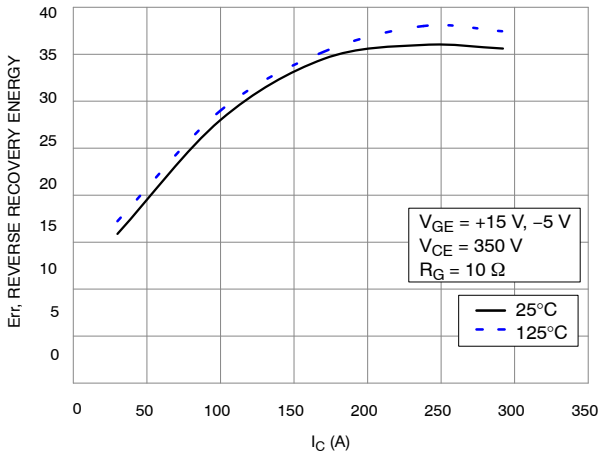

Figure 14. Typical Reverse Recovery Energy vs. I_C

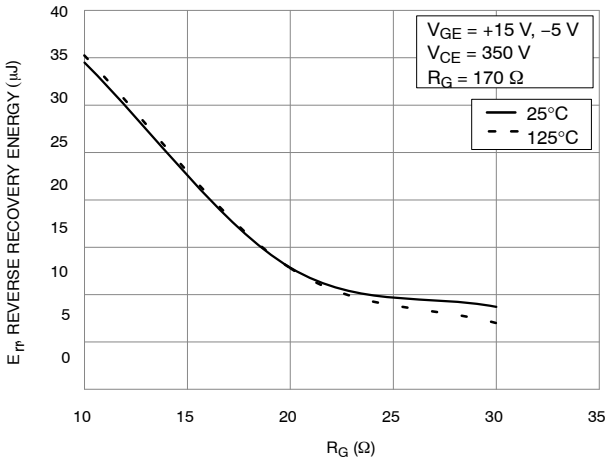

Figure 15. Typical Reverse Recovery Energy Loss vs. R_G

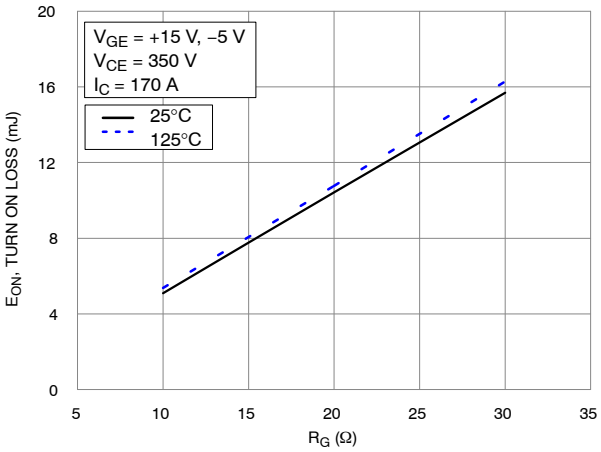

Figure 16. Typical Turn ON Loss vs. R_G

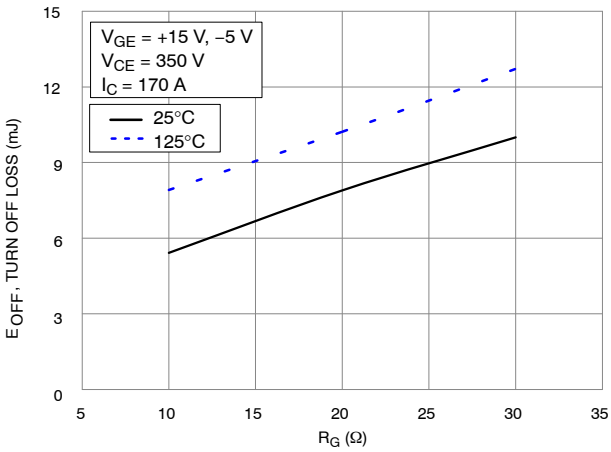

Figure 17. Typical Turn OFF vs. R_G

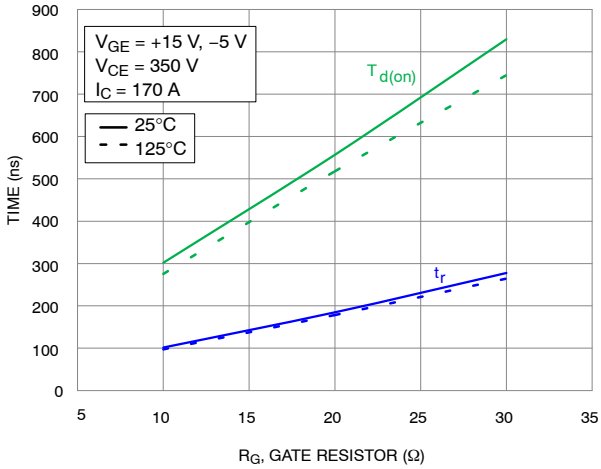

Figure 18. Typical Turn ON Switching Time vs. R_G

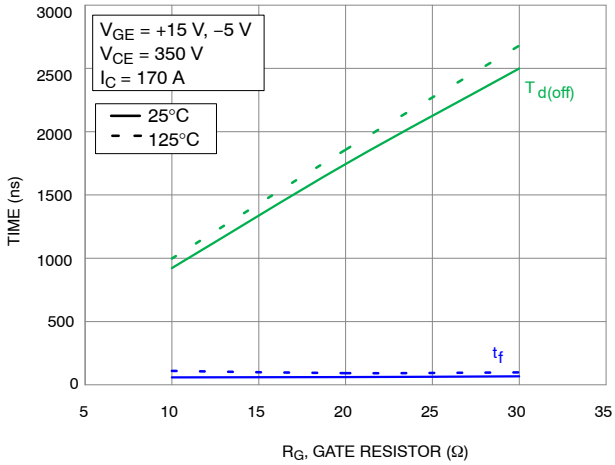

Figure 19. Typical Turn OFF Switching Time vs. R_G

TYPICAL CHARACTERISTICS – HALF BRIDGE IGBT AND NEUTRAL POINT DIODE

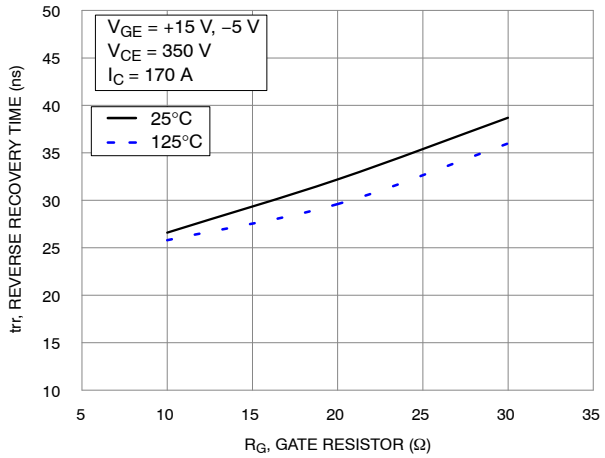

Figure 20. Typical Reverse Recovery Energy vs. I_C

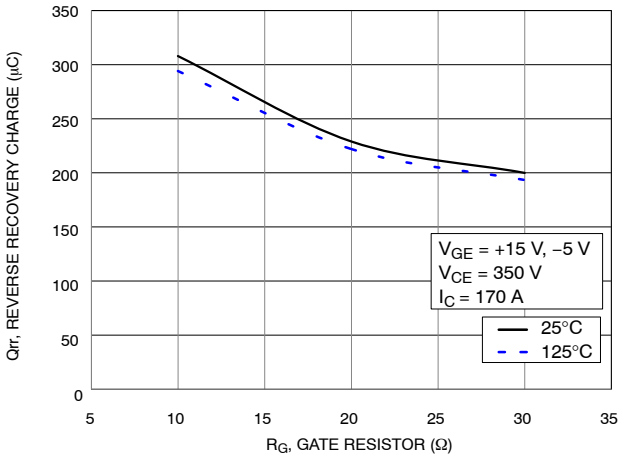

Figure 21. Typical Reverse Recovery Energy Loss vs. R_G

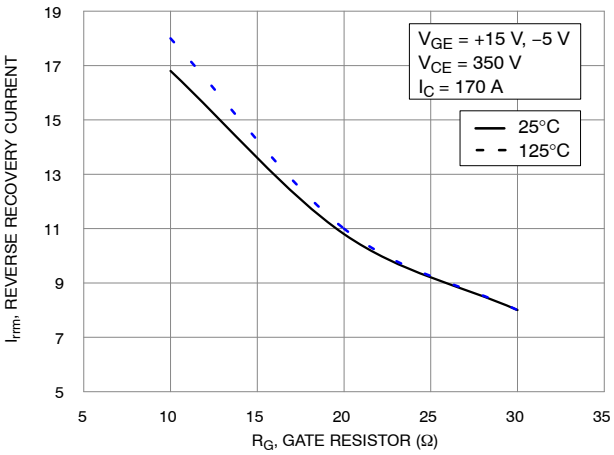

Figure 22. Typical Turn ON Loss vs. R_G

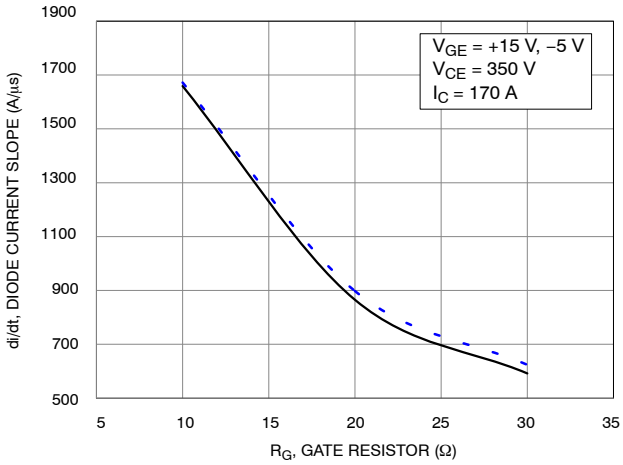

Figure 23. Typical Turn OFF vs. R_G

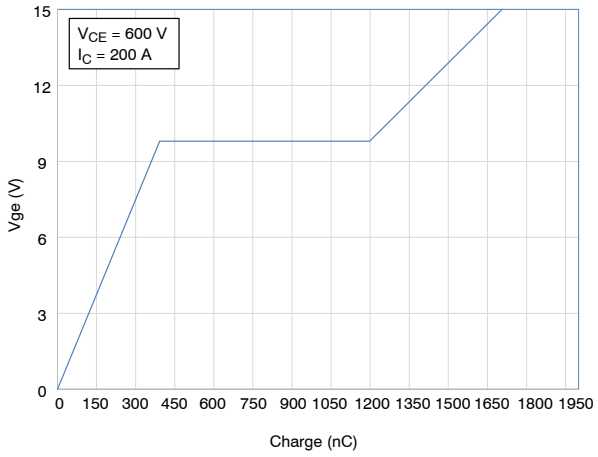

Figure 24. Gate Voltage vs. Gate Charge

TYPICAL CHARACTERISTICS – HALF BRIDGE IGBT AND NEUTRAL POINT DIODE

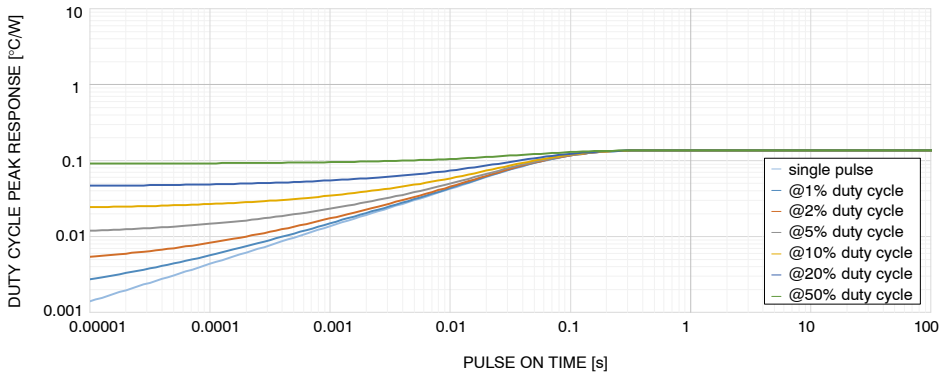

Figure 25. IGBT Transient Thermal Impedance

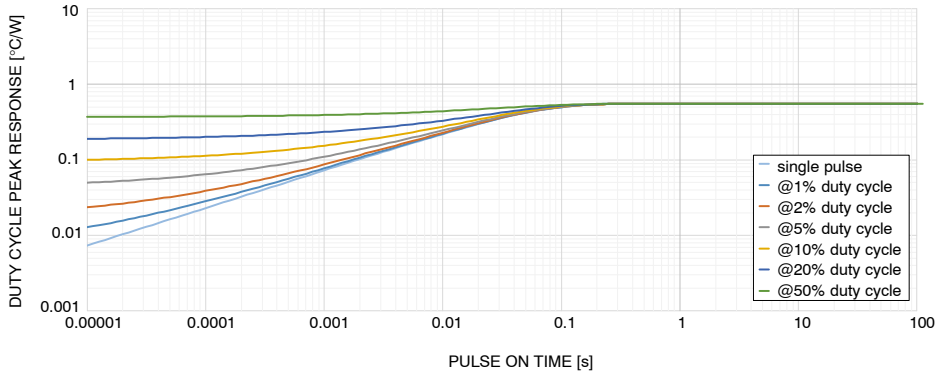

Figure 26. Diode Transient Thermal Impedance

TYPICAL CHARACTERISTICS – HALF BRIDGE IGBT AND NEUTRAL POINT DIODE

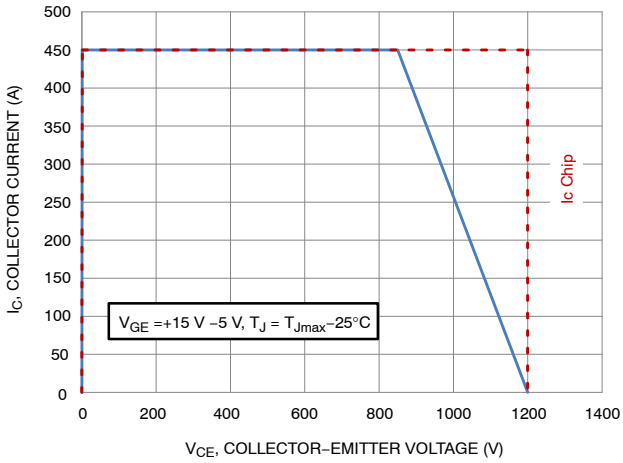

Figure 27. HB IGBT RBSOA

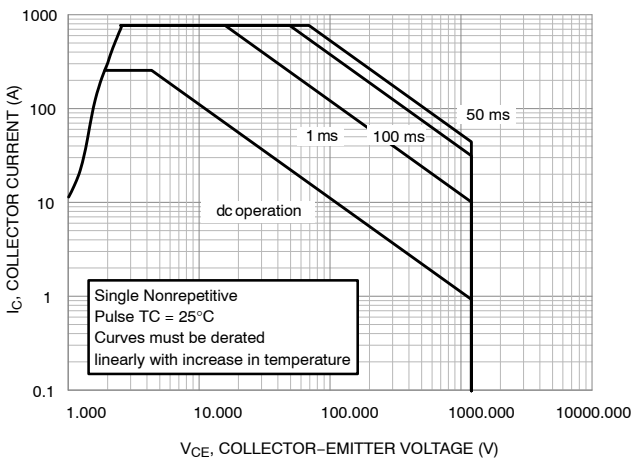

Figure 28. HB IGBT FBSOA

TYPICAL CHARACTERISTICS – NEUTRAL POINT IGBT AND HALF BRIDGE DIODE

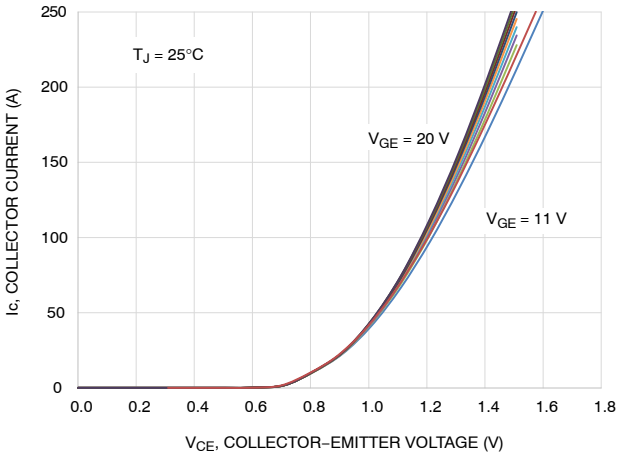

Figure 29. Typical Output Characteristics

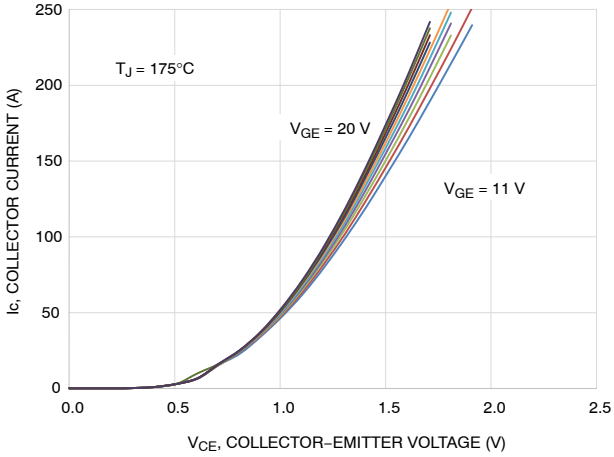

Figure 30. Typical Output Characteristics

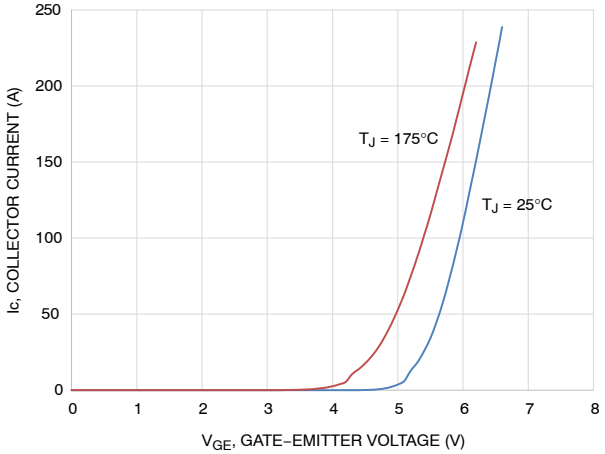

Figure 31. Typical Transfer Characteristics

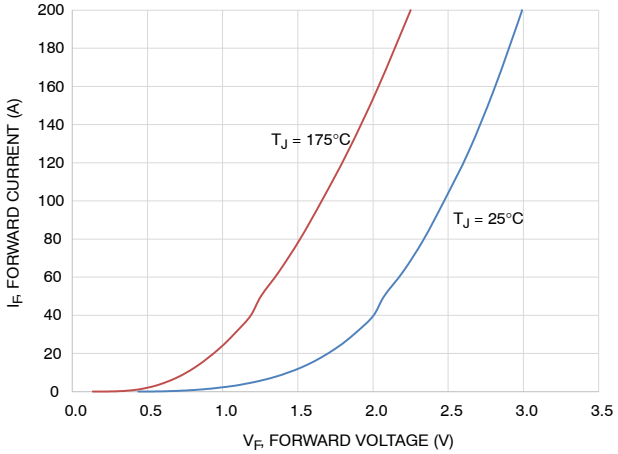

Figure 32. Typical Diode Forward Characteristics

TYPICAL CHARACTERISTICS – NEUTRAL POINT IGBT AND HALF BRIDGE DIODE

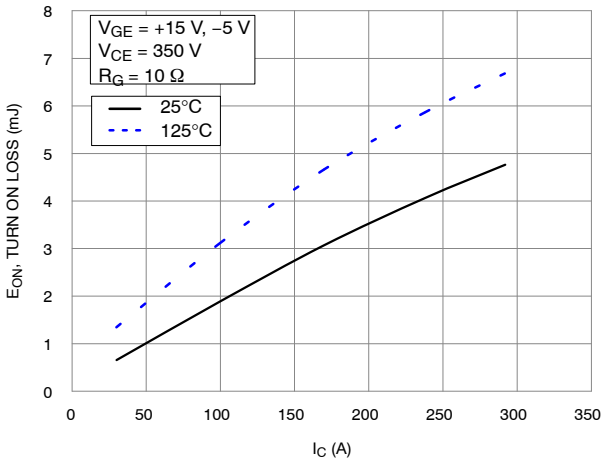

Figure 33. Typical Turn ON Loss vs. I_C

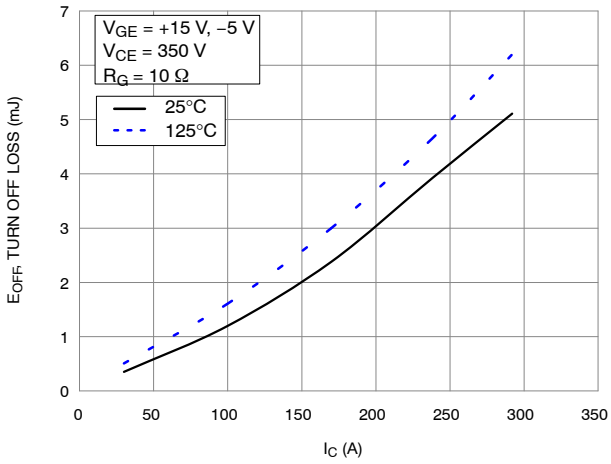

Figure 34. Typical Turn OFF Loss vs. I_C

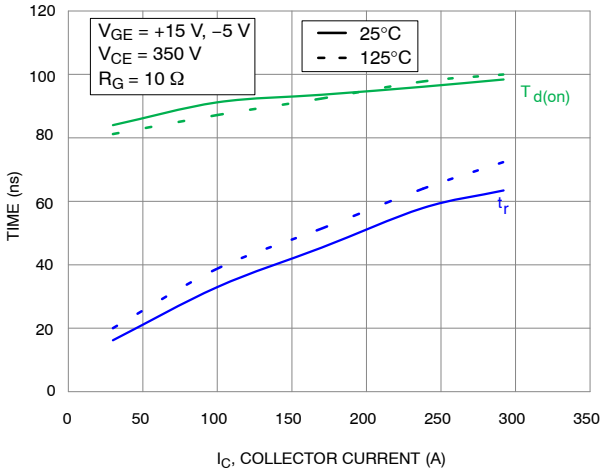

Figure 35. Typical Turn ON Switching Time vs. I_C

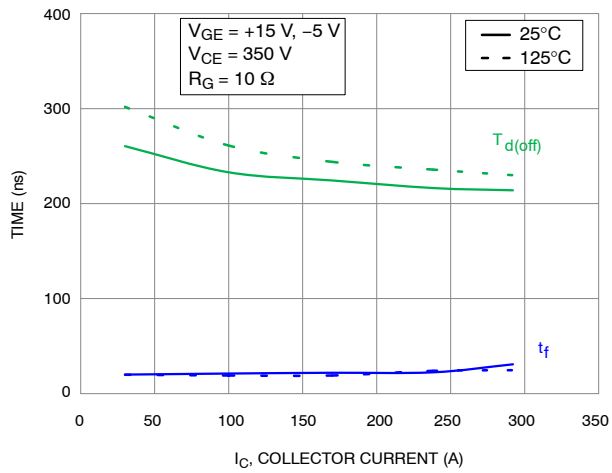

Figure 36. Typical Turn OFF Switching Time vs. I_C

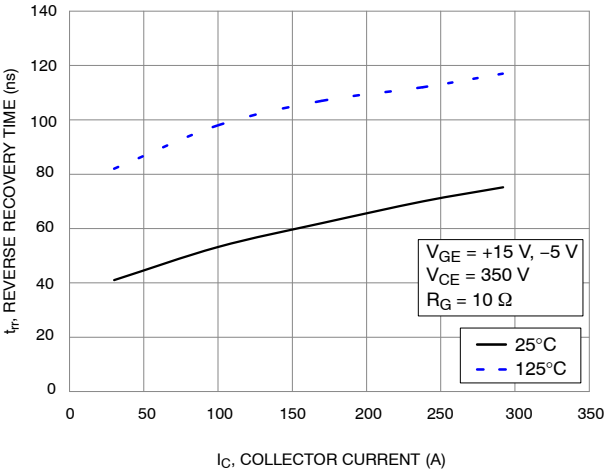

Figure 37. Typical Reverse Recovery Time vs. I_C

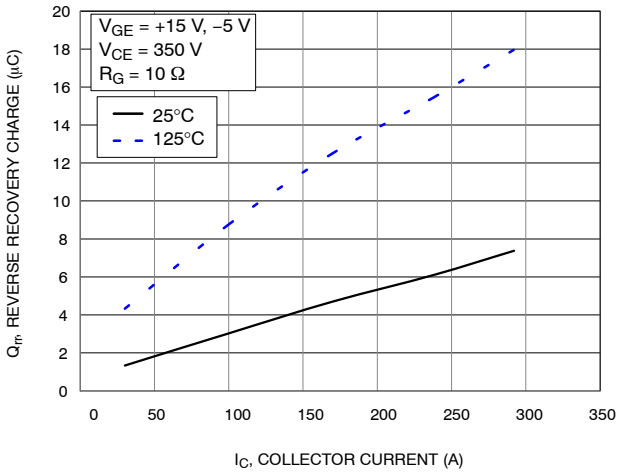

Figure 38. Typical Reverse Recovery Charge vs. I_C

TYPICAL CHARACTERISTICS – NEUTRAL POINT IGBT AND HALF BRIDGE DIODE

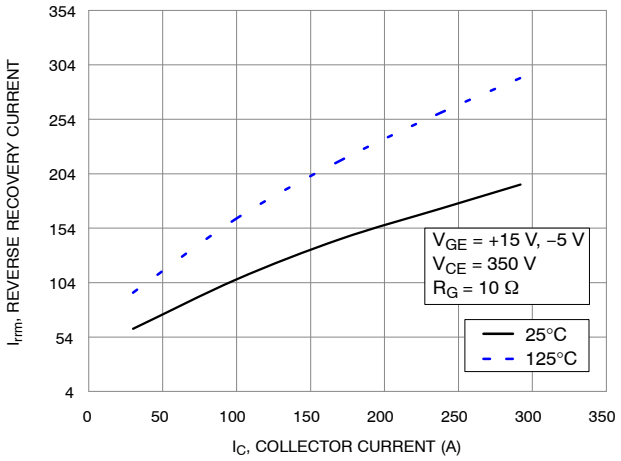

Figure 39. Typical Turn ON Loss vs. I_C

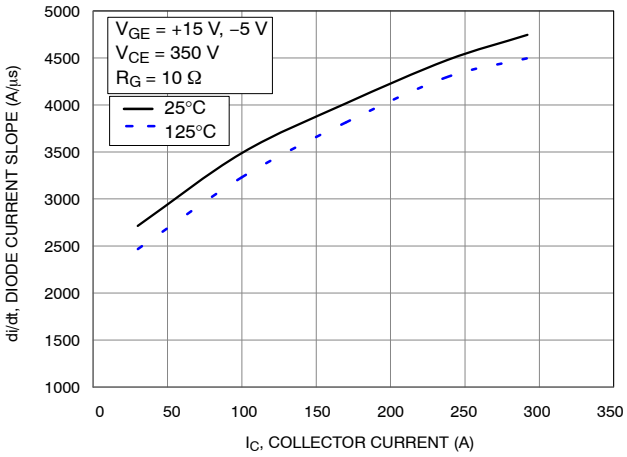

Figure 40. Typical Turn OFF Loss vs. I_C

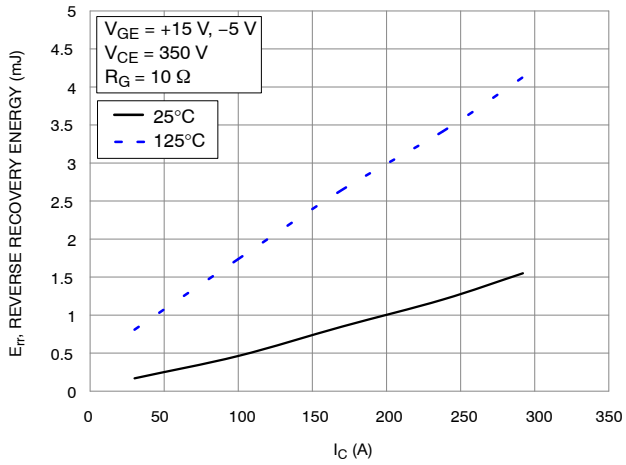

Figure 41. Typical Turn ON Switching Time vs. I_C

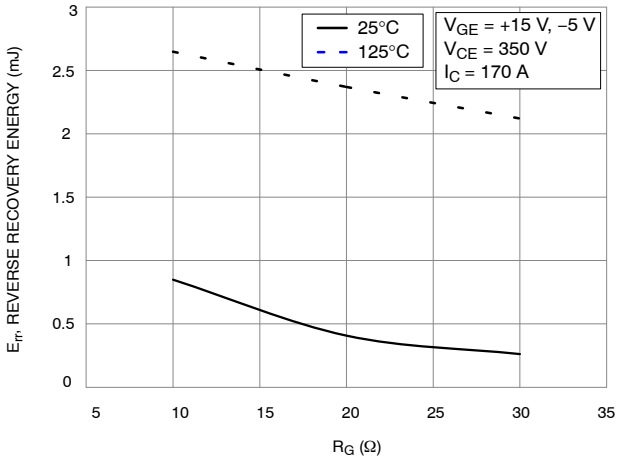

Figure 42. Typical Turn OFF Switching Time vs. I_C

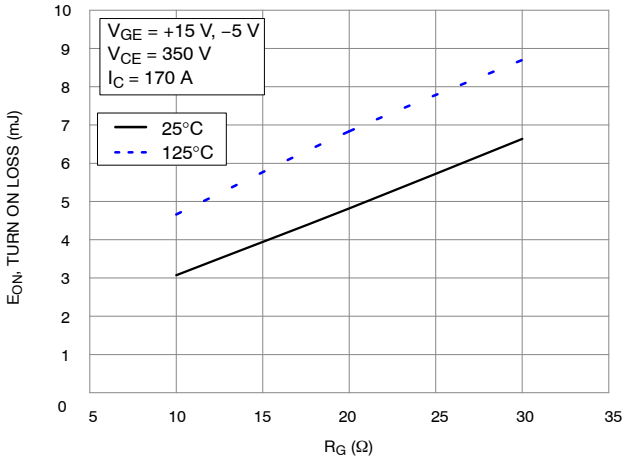

Figure 43. Typical Turn ON Loss vs. R_G

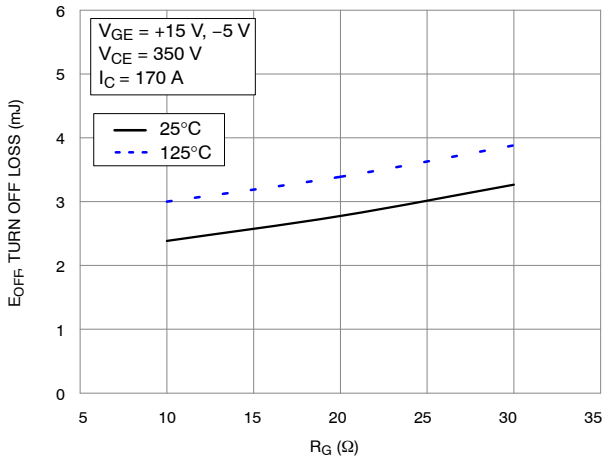

Figure 44. Typical Turn OFF vs. R_G

TYPICAL CHARACTERISTICS – NEUTRAL POINT IGBT AND HALF BRIDGE DIODE

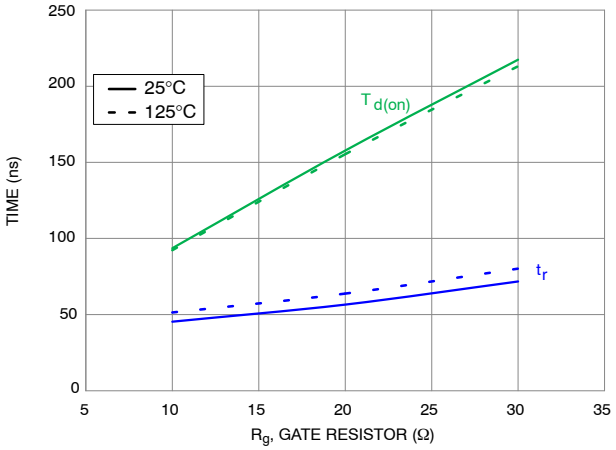

Figure 45. Typical Turn ON Switching Time vs. R_G

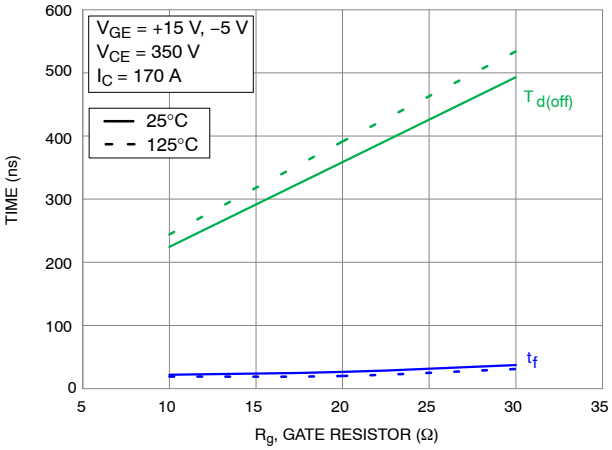

Figure 46. Typical Turn OFF Switching Time vs. R_G

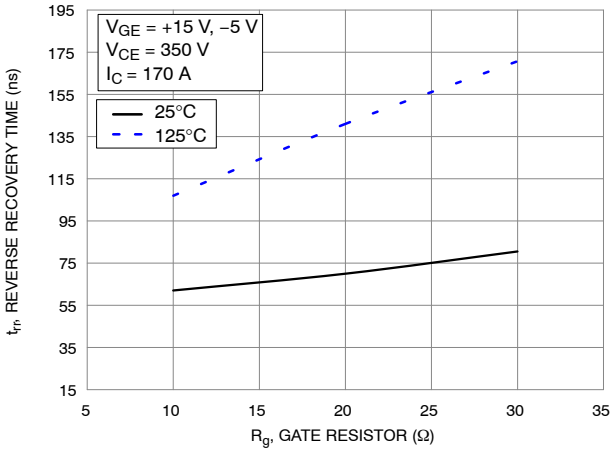

Figure 47. Typical Reverse Recovery Time vs. R_G

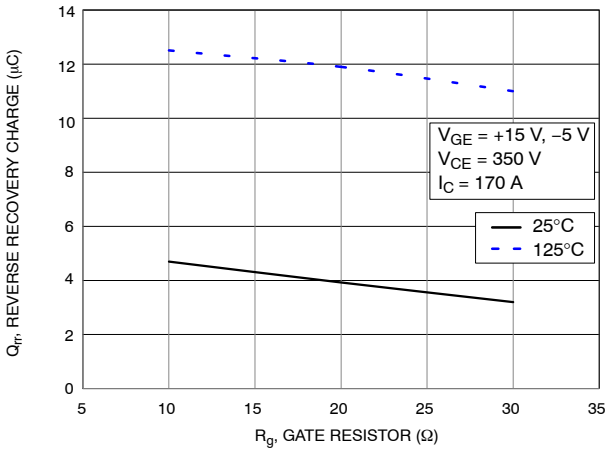

Figure 48. Typical Reverse Recovery Charge vs. R_G

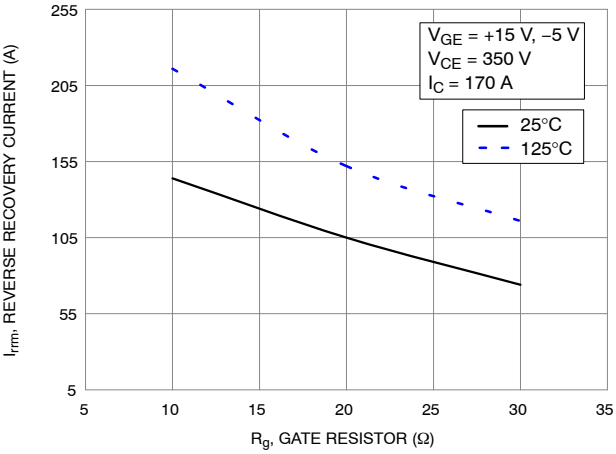

Figure 49. Typical Reverse Recovery Peak Current vs. R_G

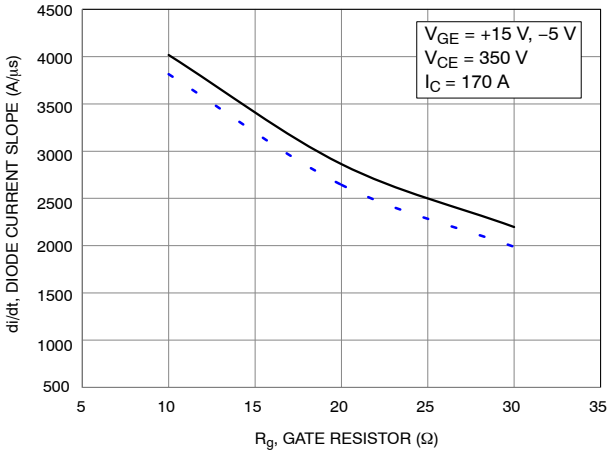

Figure 50. Typical Di/Dt vs. R_G

TYPICAL CHARACTERISTICS – NEUTRAL POINT IGBT AND HALF BRIDGE DIODE

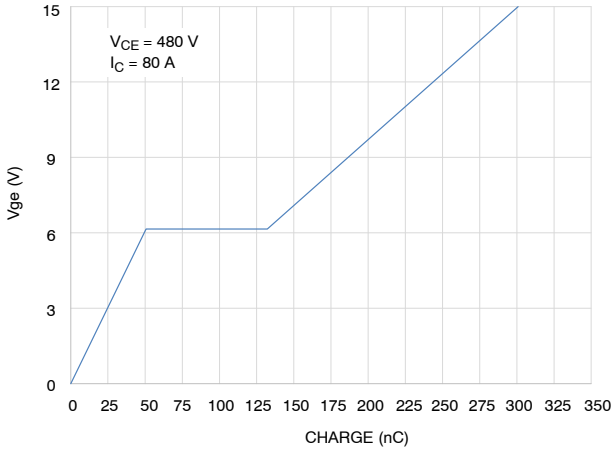

Figure 51. Gate Voltage vs. Gate Charge

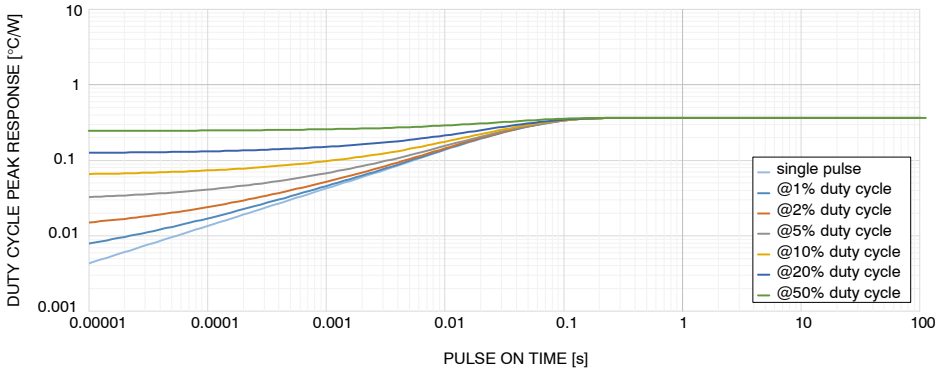

Figure 52. IGBT Transient Thermal Impedance

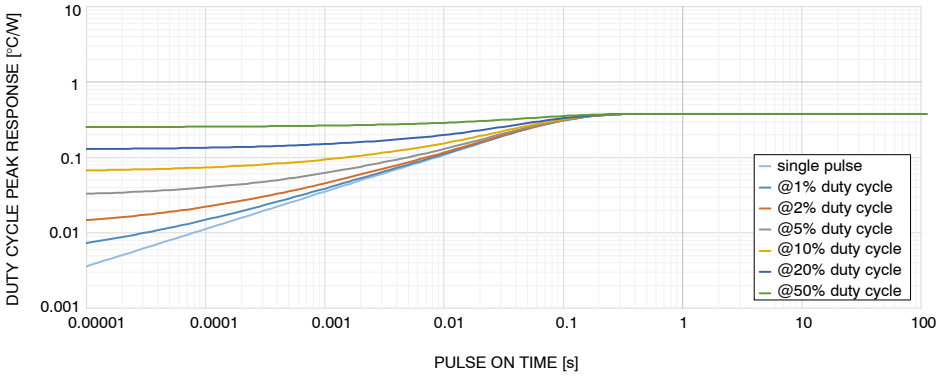

Figure 53. Diode Transient Thermal Impedance

TYPICAL CHARACTERISTICS – NEUTRAL POINT IGBT AND HALF BRIDGE DIODE

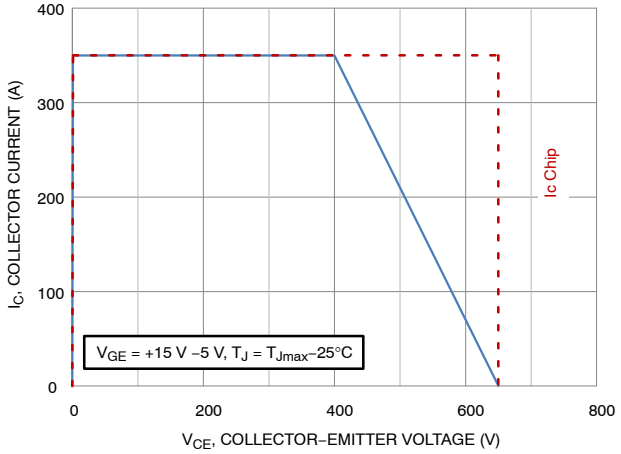

Figure 54. NP IGBT RBSOA

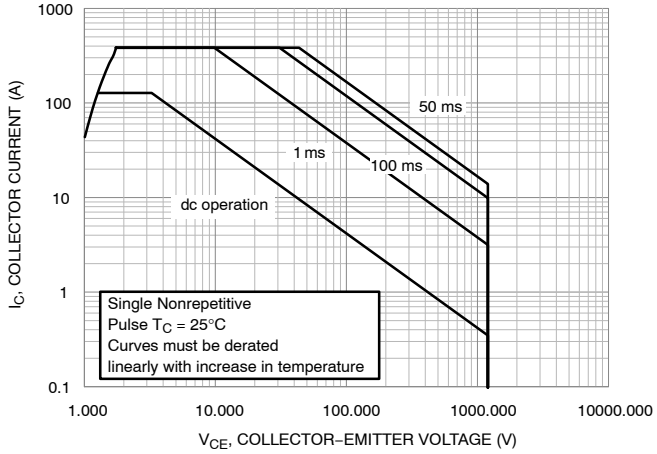

Figure 55. NP IGBT FBSOA

TYPICAL CHARACTERISTICS – HALF BRIDGE INVERSE DIODE

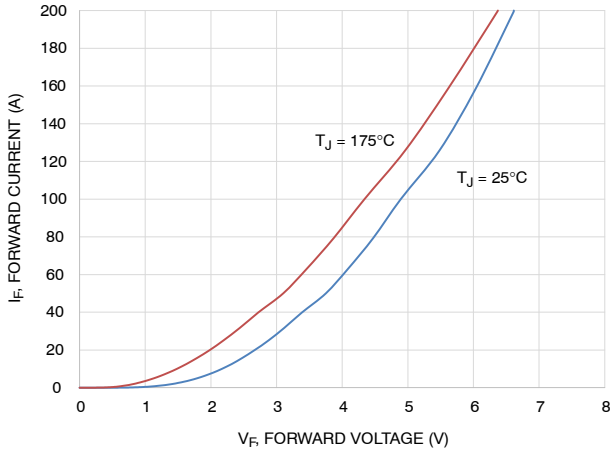

Figure 56. Diode Forward Characteristic

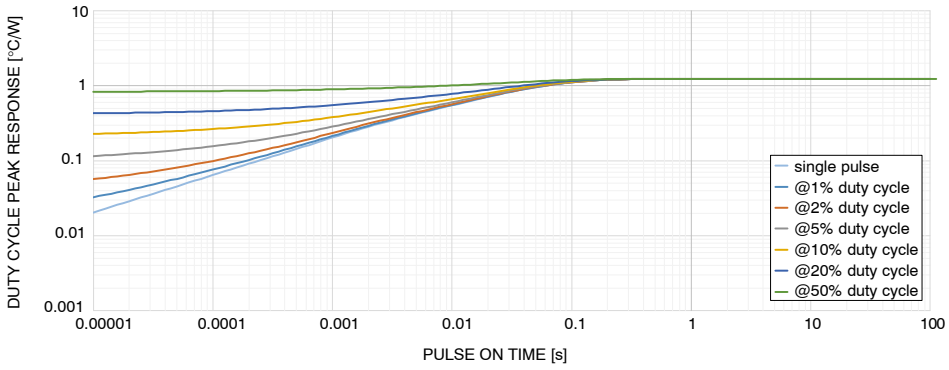

Figure 57. Diode Transient Thermal Impedance

TYPICAL CHARACTERISTICS – NEUTRAL POINT INVERSE DIODE

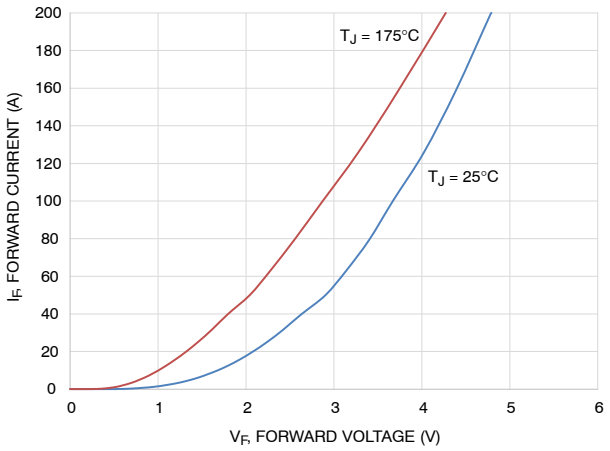

Figure 58. Diode Forward Characteristic

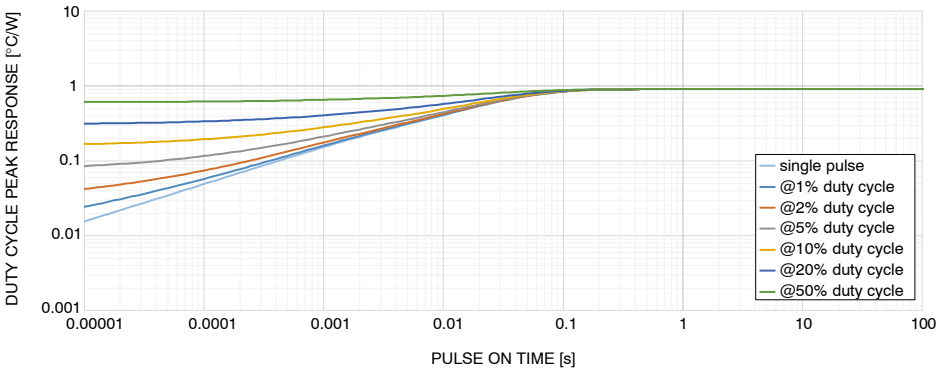

Figure 59. Diode Transient Thermal Impedance

TYPICAL CHARACTERISTICS – THERMISTOR

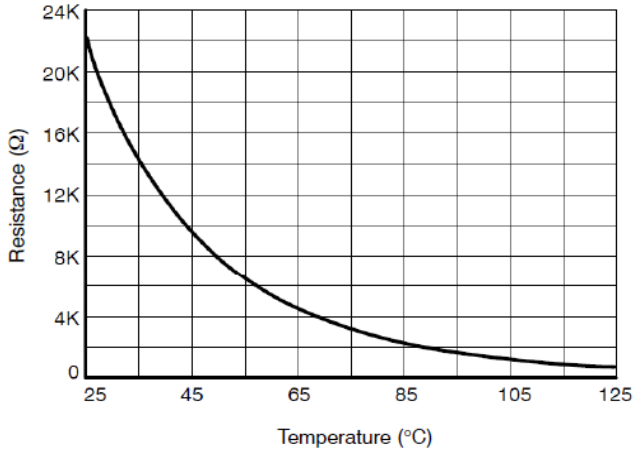

Figure 60. Thermistor Characteristics

PIM56, 93x47 (SOLDER PIN)

CASE 180AK
ISSUE B

DATE 08 NOV 2017

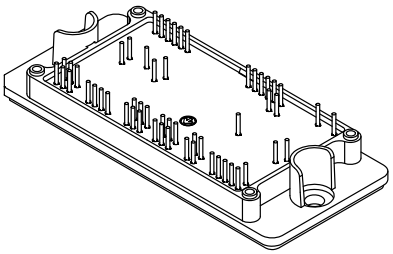

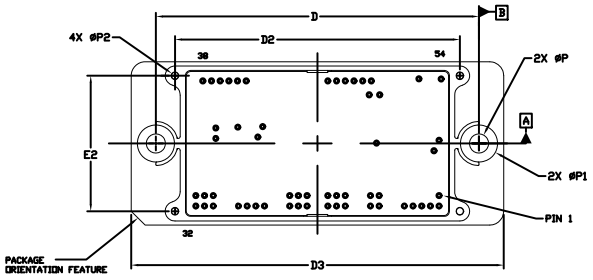

TOP VIEW



END VIEW

NOTES:

1. DIMENSIONING AND TOLERANCING PER ASME Y14.5M, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSIONS b APPLIES TO THE PLATED TERMINALS AND IS MEASURED BETWEEN 1.00 AND 3.00 FROM THE TERMINAL TIP.
4. POSITION OF THE CENTER OF THE TERMINALS IS DETERMINED FROM DATUM B THE CENTER OF DIMENSION D, X DIRECTION, AND FROM DATUM A, Y DIRECTION. POSITIONAL TOLERANCE, AS NOTED IN DRAWING, APPLIES TO EACH TERMINAL IN BOTH DIRECTIONS.
5. PACKAGE MARKING IS LOCATED AS SHOWN ON THE SIDE WITH THE PACKAGE ORIENTATION FEATURE.

DIM	MILLIMETERS MIN.	MAX.
A	11.80	12.20
A1	4.50	4.90
A2	16.50	16.90
A3	16.70	17.70
A4	12.80	13.20
b	0.95	1.05
D	92.80	93.20
D1	104.60	104.90
D2	81.80	82.20
D3	106.90	107.50
E	46.75	47.25
E1	44.30	44.50
E2	38.80	39.20
P	5.40	5.60
P1	10.60	10.80
P2	2.20	2.40

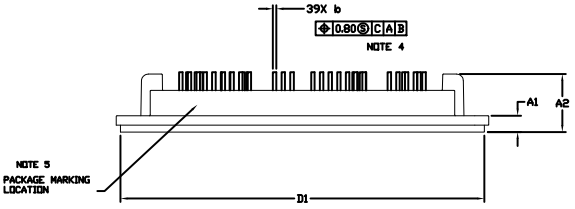

SIDE VIEW

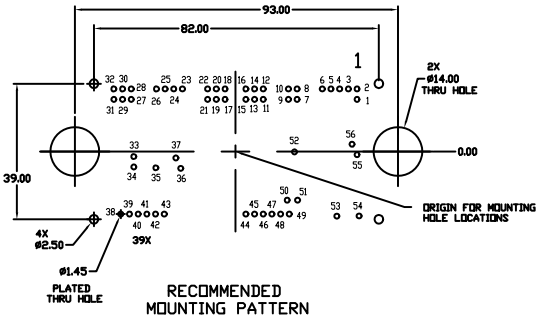

RECOMMENDED
MOUNTING PATTERN

NOTE 4

PIN	PIN POSITION X	Y	PIN	PIN POSITION X	Y
1	35.00	-15.00	29	-32.50	-15.00
2	35.00	-18.00	30	-32.50	-18.00
3	32.50	-18.00	31	-35.00	-15.00
4	30.00	-18.00	32	-35.00	-18.00
5	27.50	-18.00	33	-29.25	1.45
6	25.00	-18.00	34	-29.25	4.45
7	17.75	-15.00	35	-22.90	4.70
8	17.75	-18.00	36	-15.75	4.85
9	15.25	-15.00	37	-17.15	1.85
10	15.25	-18.00	38	-33.00	18.00
11	8.00	-15.00	39	-30.50	18.00
12	8.00	-18.00	40	-28.00	18.00
13	5.50	-15.00	41	-25.50	18.00
14	5.50	-18.00	42	-23.00	18.00
15	3.00	-15.00	43	-20.50	18.00
16	3.00	-18.00	44	3.00	18.00
17	-3.00	-15.00	45	5.50	18.00
18	-3.00	-18.00	46	8.00	18.00
19	-5.50	-15.00	47	10.50	18.00
20	-5.50	-18.00	48	13.00	18.00
21	-8.00	-15.00	49	15.50	18.00
22	-8.00	-18.00	50	14.90	14.00
23	-15.25	-18.00	51	17.90	14.00
24	-17.75	-18.00	52	17.00	0.10
25	-20.25	-18.00	53	29.20	18.60
26	-22.75	-18.00	54	35.60	18.55
27	-30.00	-15.00	55	35.00	0.90
28	-30.00	-18.00	56	33.55	-2.10

MOUNTING HOLE POSITION

PIN	PIN POSITION X	Y	PIN	PIN POSITION X	Y
1	35.00	15.00	29	-32.50	15.00
2	35.00	18.00	30	-32.50	18.00
3	32.50	18.00	31	-35.00	15.00
4	30.00	18.00	32	-35.00	18.00
5	27.50	18.00	33	-29.25	-1.45
6	25.00	18.00	34	-29.25	-4.45
7	17.75	15.00	35	-22.90	-4.70
8	17.75	18.00	36	-15.75	-4.85
9	15.25	15.00	37	-17.15	-1.85
10	15.25	18.00	38	-33.00	-18.00
11	8.00	15.00	39	-30.50	-18.00
12	8.00	18.00	40	-28.00	-18.00
13	5.50	15.00	41	-25.50	-18.00
14	5.50	18.00	42	-23.00	-18.00
15	3.00	15.00	43	-20.50	-18.00
16	3.00	18.00	44	3.00	-18.00
17	-3.00	15.00	45	5.50	-18.00
18	-3.00	18.00	46	8.00	-18.00
19	-5.50	15.00	47	10.50	-18.00
20	-5.50	18.00	48	13.00	-18.00
21	-8.00	15.00	49	15.50	-18.00
22	-8.00	18.00	50	14.90	-14.00
23	-15.25	18.00	51	17.90	-14.00
24	-17.75	18.00	52	17.00	-0.10
25	-20.25	18.00	53	29.20	-18.60
26	-22.75	18.00	54	35.60	-18.55
27	-30.00	15.00	55	35.00	-0.90
28	-30.00	18.00	56	33.55	2.10

GENERIC MARKING DIAGRAM*

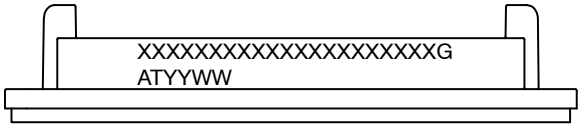

XXXXX = Specific Device Code
G = Pb−Free Package
AT = Assembly & Test Site Code
YYWW= Year and Work Week Code

*This information is generic. Please refer to device data sheet for actual part marking. Pb−Free indicator, “G” or microdot “ ▪ ”, may or may not be present. Some products may not follow the Generic Marking.

DOCUMENT NUMBER:	98AON63482G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped “CONTROLLED COPY” in red.
DESCRIPTION:	PIM56 93X47 (SOLDER PIN)	PAGE 1 OF 1

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba **onsemi** or its subsidiaries in the United States and/or other countries. **onsemi** reserves the right to make changes without further notice to any products herein. **onsemi** makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. **onsemi** does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI , and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent−Marking.pdf. **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as−is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

ADDITIONAL INFORMATION

TECHNICAL PUBLICATIONS:
Technical Library: www.onsemi.com/design/resources/technical−documentation
onsemi Website: www.onsemi.com

ONLINE SUPPORT: www.onsemi.com/support
For additional information, please contact your local Sales Representative at
www.onsemi.com/support/sales