

# NCL30388LED1GEVB

## NCL30388LED1 60 W High Power Factor LED Driver Evaluation Board User's Manual

### Evaluation Board Overview

This manual covers the specification, theory of operation, testing and construction of the NCL30388LED1GEVB demonstration board. The NCL30388 board demonstrates an isolated Primary Side Regulation 60 W high PF flyback LED driver for a typical troffer application.

### The Key Features of this Demo Board

- Low THD
- High Power Factor
- Fast Startup
- CC/CV Operation
- Integrated Fault Protection
  - ◆ Brown-Out Protection
  - ◆ Winding and Diode Short Circuit Protection
  - ◆ Over Temperature
  - ◆ Output Over Current
  - ◆ Output Over Voltage

### Specifications

|                          |                |         |
|--------------------------|----------------|---------|
| Input Voltage            | 100 – 265 V ac |         |
| Line Frequency           | 50/60 Hz       |         |
| Power Factor (100% Load) | 0.9            | Min.    |
| THD (Load > 20%)         | 20%            | Max.    |
| Output Voltage           | 40 V dc        |         |
| Output Ripple            | 50%            | Pk – Pk |
| Output Current           | 1.5 A dc       | ±5%     |
| Efficiency               | 92%            | Max.    |
| Start Up Time            | < 250 ms       |         |



ON Semiconductor®

[www.onsemi.com](http://www.onsemi.com)

### EVAL BOARD USER'S MANUAL



Figure 1. NCL30388LED1 Evaluation Board

## THEORY OF OPERATION

**Power Stage**

The power stage is a PSR flyback design. No direct connection to the output is required for regulation with a PSR. The power stage operates as a QR power stage. The QR operation allows for optimum commutation of the output diode for good EMI performance and high efficiency. The

power stage operates in CrM at loads above 80%. Below 80% load, the power stage goes into valley skip. A line range selector skips an extra valley for line voltages above about 150 V ac. This maintains a more constant operating frequency and improves efficiency.

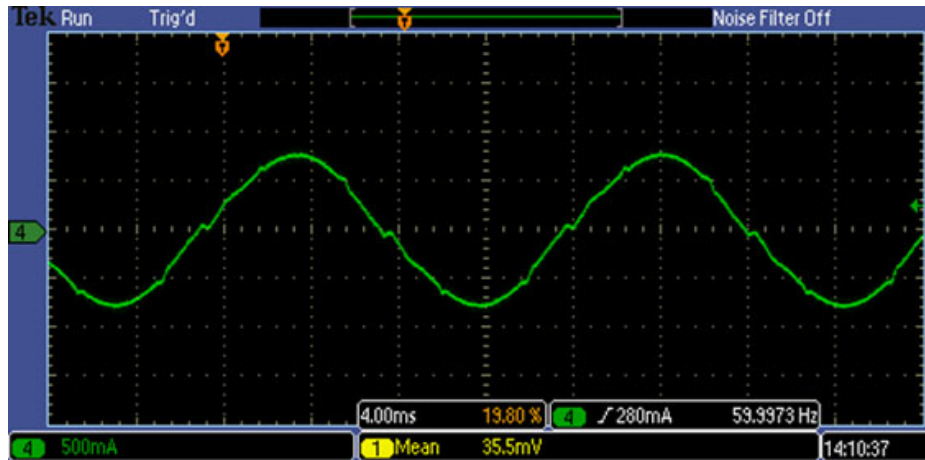


Figure 2. Input Current

**HV Pin Functions**

*The HV Pin provides 3 Essential Functions:*

1. HV Start Current
2. Rectified Line Voltage Sensing
  - a. PFC Loop Reference
  - b. Line Range Selection

***HV Start***

The HV pin sources current to C14 until  $V_{CC}$  reaches 18 V. The controller starts up at 18 V and begins switching. D4 supplies  $V_{CC}$  power from the aux winding to power the NCL30388 and the HV start current source switches off to reduce power losses. The constant current charge of C14 makes the startup time very consistent over line. The HV startup will supply  $V_{CC}$  power when the  $V_{CC}$  reaches 8.6 V to maintain operation in extreme light load conditions. The HV pin's 700 V rating is robust for applications above 265 V ac.

***Rectified Line Sensing***

The rectified AC line supplies the HV pin a reference for the PFC loop. The signal is internally scaled for the control circuit. As such, distortion on this pin will result in distortion in the input current. Low distortion over a wide mains is best achieved with a small capacitor on the HVDC or even placed on the AC side of the bridge rectifier. L1 attenuates EMI because the value of C10 is small to preserve high PF and low THD. C7 & R17 form a damper to dampen out resonances in the EMI filter.

***Line Range Selection***

Internally the HV pin changes gain in the feedback loop to dynamically adjust the control for optimum PF, THD, and regulation. Unlike controllers such as NCL30188, the range selection voltage is not user adjustable because the division from HVDC is set internally rather than externally. While this may seem to be a loss of adjustability, the range selection is set to a voltage that is not within any normal operating range worldwide.

**ZCD Pin**

The ZCD pin senses zero current point to restart the switch cycle and counts the valleys for valley selection. Additionally the ZCD pin senses the output voltage from the aux winding for short circuit detection and CV set voltage. If the ZCD pin does not measure a voltage greater than 1 V in the off time, the controller shuts down because it interprets this as a short circuit. The controller will restart in 4s. The CV set voltage is 2.48 V on the ZCD pin during the off time. This voltage is scaled through the turns ratio of the flyback transformer and the resistor divider on ZCD to regulate the output voltage in case of an open load. The voltage is constantly regulated rather than switching off as an OVP event. This allows the output to be used as a CV output as well as a CC output. Care must be taken to ensure that the CV set point is above the maximum LED voltage or the LED will dim as the CV loop limits the output voltage. We can see that the ZCD voltage is limited to the range of 1 V to 2.48 V in normal operation. This gives a practical LED output voltage range of 2:1.

## Output Current regulation

Output current regulation is set by the primary sense resistor R15 & R14 according to this equation:

$$I_{out} = \frac{V_{REF}}{8N_{sp}R_{sense}} \quad (\text{eq. 1})$$

Where  $V_{ref} = 0.33 \text{ V}$  and  $N_{sp} = \text{Secondary/Primary turns ratio}$ .

The internal control algorithm computes the output current based on measured parameters on the primary side which eliminates the need for secondary side controls circuits.

## Comp Pin

The Comp pin is the output from the OTA that regulates current or voltage. As with any PFC, the bandwidth of this feedback loop must be less than the line frequency. R11, C17, & C18 make up the compensation network. The network can be as simple as a single capacitor but better dynamic response is achieved with this network configuration. The NCL30388 samples the max and min values on the comp pin and averages them mathematically. This makes the PF and THD much less dependent on the line frequency ripple on comp.

## CS Pin

The current sense pin controls the peak primary current. The maximum threshold in normal operation is 1.38 V with an LEB of 330 ns. In case of extreme faults such as a shorted rectifier, the threshold for immediate stop is 1.99 V with an LEB of 170 ns. R13 provides 2 important functions:

1. CS Short Detection
2. Line Feedforward Compensation

## CS Short Detection

During startup, CS sources a small current to check if the CS pin is accidentally shorted to ground. In reality, this is usually a manufacturing defect. Typically a shorted CS pin would result in catastrophic failure if undetected. Thanks to this protection feature, a failure can be avoided. R13 must be greater than  $250 \Omega$  or CS will detect a short. Note that this short circuit checking is turned off during normal switching operation.

## Line Feedforward

The PSR control compensates for many errors in computing the output current such as leakage inductance. Some error sources are variable with line such as the effect of delays in the power stage. As the input voltage increases, the power stage delays cause the peak current to overshoot slightly the intended target peak current. This results in output current increasing with line. While this is not usually a very large increase in output current, the control can compensate for this by sourcing a current into CS that is proportional to the input voltage. This reduces the target peak current slightly such that the effect of the delay is cancelled and regulation is improved. Finding the optimum value of R13 is a bit of trial and error. Also any impedance between DRV and the FET, will degrade regulation.

## Protection

### Thermal Protection

The thermal protection based on internal die temperature is built into the NCL30388.

### OVP

An OVP is activated if  $V_{CC}$  exceeds 26.5 V. The NCL30388 will timeout for 4 s and attempt to restart.

## SCHEMATIC

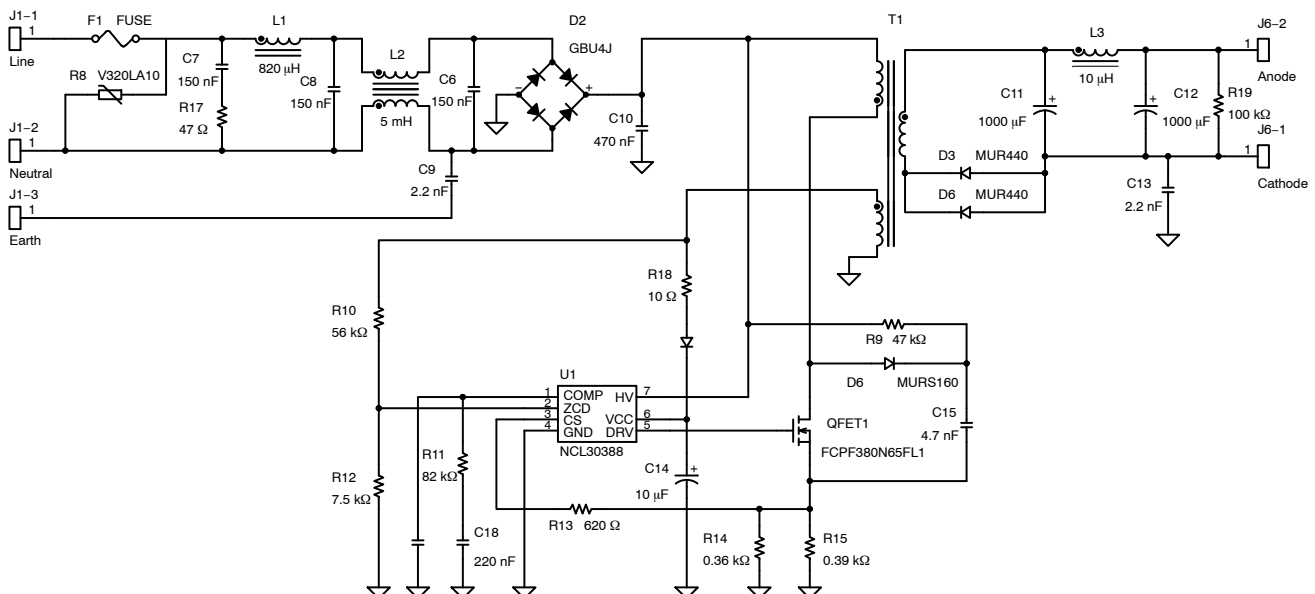


Figure 3. Schematic

# NCL30388LED1GEVB

## GERBER VIEWS

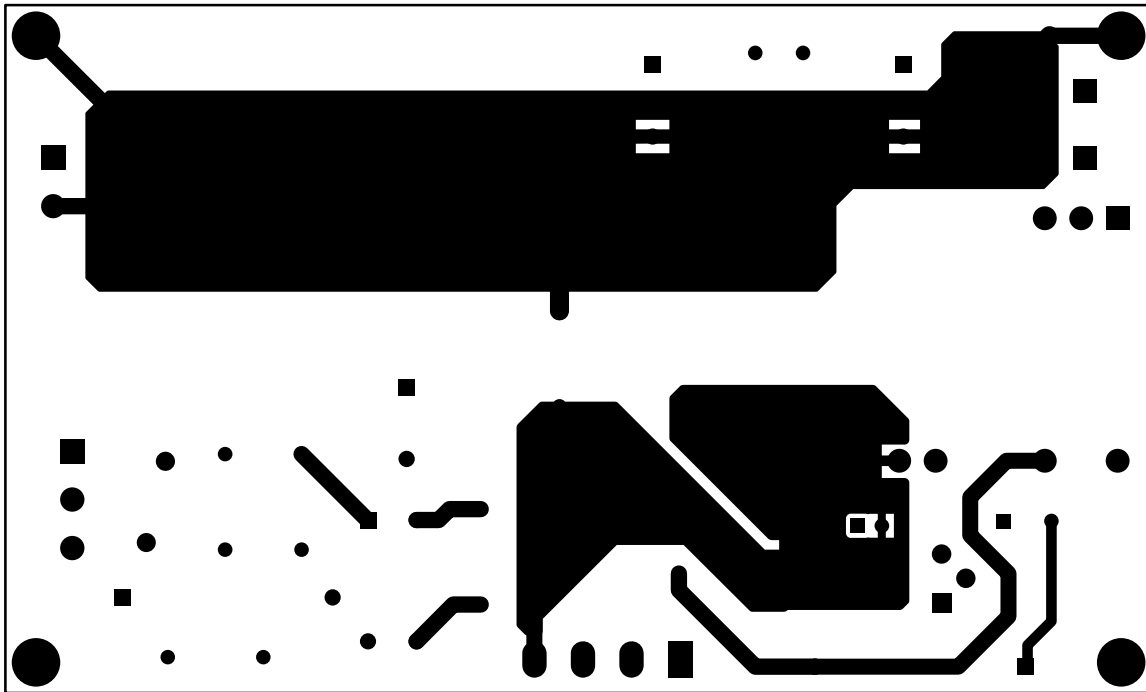


Figure 4. Top Side PCB

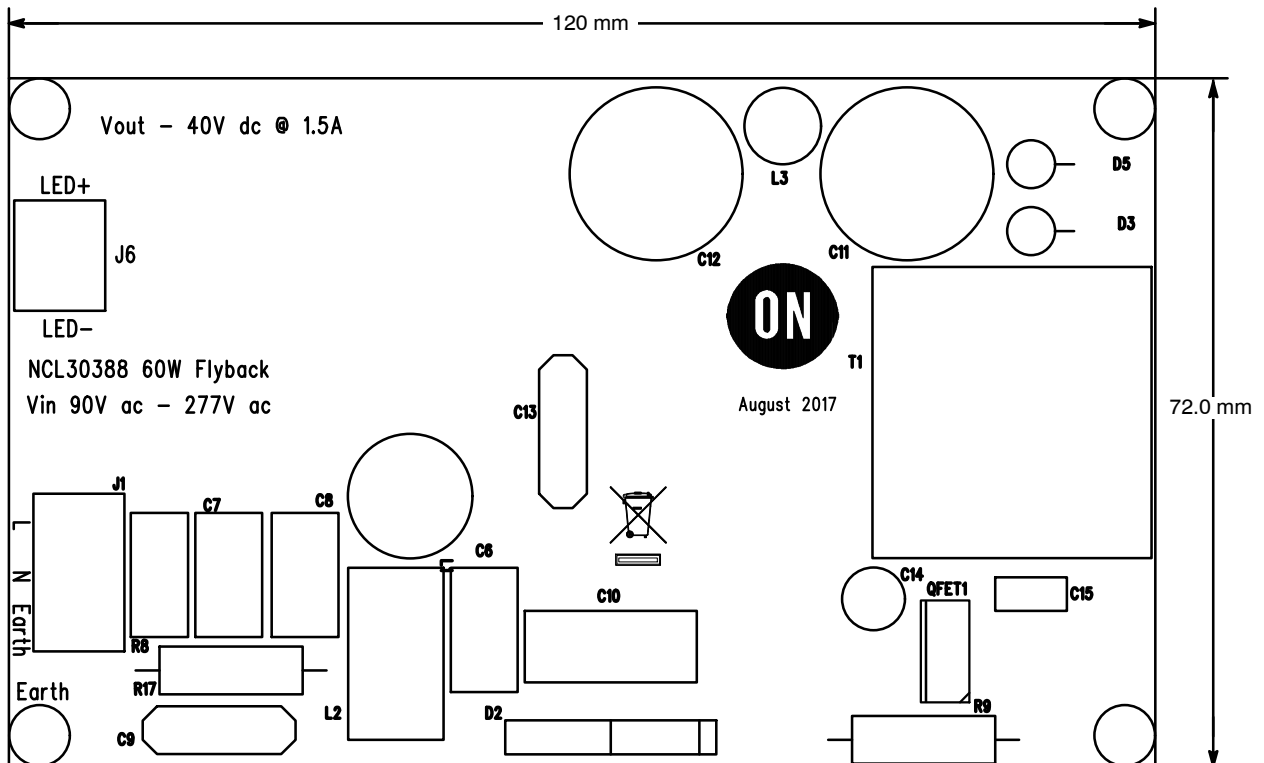


Figure 5. PCB Outline

## CIRCUIT BOARD FABRICATION NOTES

1. Fabricate per IPC-6011 and IPC6012. Inspect to IPA-A-600 Class 2 or updated standard.
2. Printed Circuit Board is defined by files listed in fileset.
3. Modification to copper within the PCB outline is not allowed without permission, except where noted otherwise. The manufacturer may make adjustments to compensate for manufacturing process, but the final PCB is required to reflect the associated gerber file design  $\pm 0.001$  in. for etched features within the PCB outline.
4. Material in accordance with IPC-4101/21, FR4, Tg 125°C min.
5. Layer to layer registration shall not exceed  $\pm 0.004$  in.
6. External finished copper conductor thickness shall be 0.0026 in. min. (ie 2 oz)
7. Copper plating thickness for through holes shall be 0.0013 in. min. (ie 1 oz)
8. All holes sizes are finished hole size.
9. Finished PCB thickness 0.062 in.
10. All un-dimensioned holes to be drilled using the NC drill data.
11. Size tolerance of plated holes:  $\pm 0.003$  in.: non-plated holes  $\pm 0.002$  in.
12. All holes shall be  $\pm 0.003$  in. of their true position U.D.S.
13. Construction to be SMOBC, using liquid photo image (LPI) solder mask in accordance with IPC-SM-B40C, Type B, Class 2, and be green in color.
14. Solder mask mis-registration  $\pm 0.004$  in. max.
15. Silkscreen shall be permanent non-conductive white ink.
16. The fabrication process shall be UL approved and the PCB shall have a flammability rating of UL94V0 to be marked on the solder side in silkscreen with date, manufactures approved logo, and type designation.
17. Warp and twist of the PCB shall not exceed 0.0075 in. per in.
18. 100% electrical verification required.
19. Surface finish: electroless nickel immersion gold (ENIG)
20. RoHS 2002/95/EC compliance required.

## ECA PICTURE

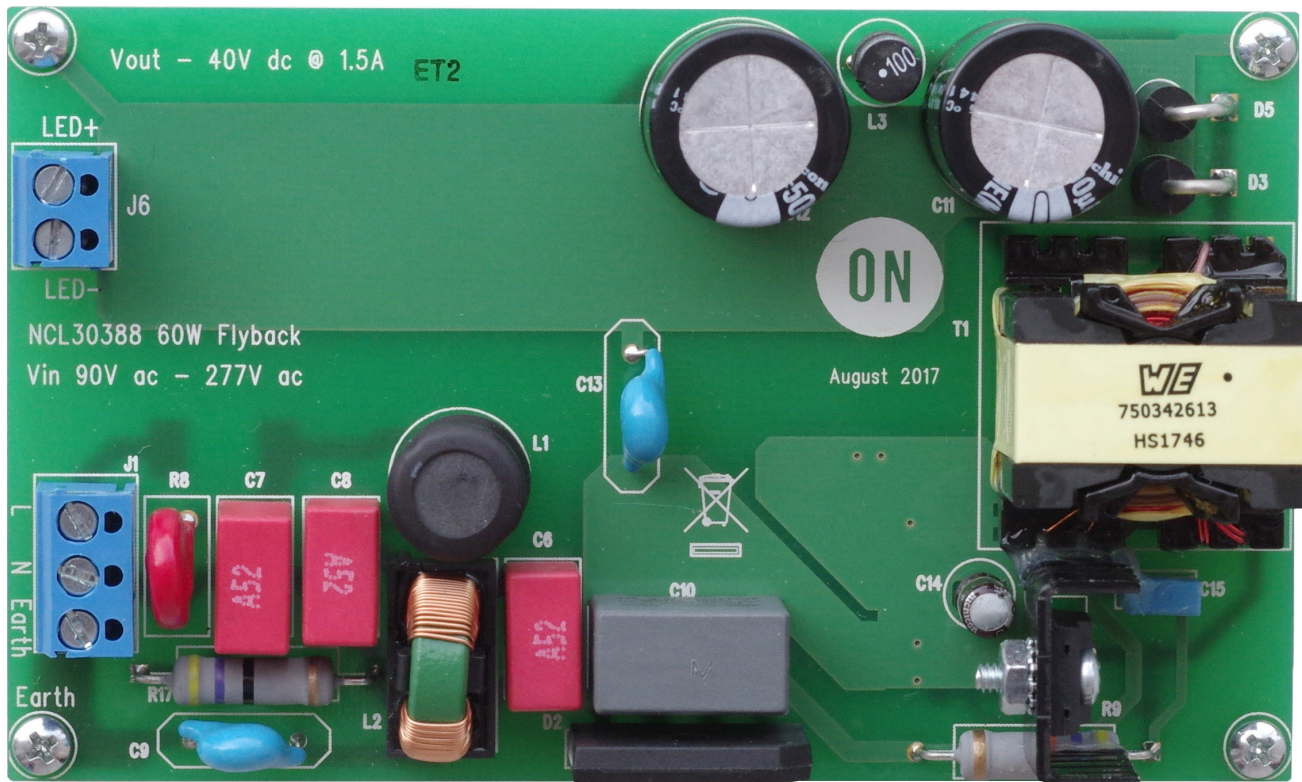


Figure 6. Top View


## TEST PROCEDURE

## Equipment Needed

- AC Source – 90 to 265 V ac 50/60 Hz Minimum 100 W capability
- AC Wattmeter – 100 W Minimum, True RMS Input Voltage, Current, and Power Factor 0.2% accuracy or better
- DC Voltmeter – 100 V dc minimum 0.1% accuracy or better
- DC Ammeter – 2 A dc minimum 0.1% accuracy or better
- LED Load – 35 V to 40 V @ 1.5 A
- Resistor Load – 100  $\Omega$ , 30 Watt minimum

## Test Connections

1. Connect the LED Load to J6 'LED+' and 'LED-' terminals through the ammeter shown in Figure 7. **Caution: Observe the correct polarity or the load may be damaged.**
2. Connect the AC power to the input of the AC wattmeter shown in Figure 7. Connect J1 'L' and 'N' terminals to the output of the AC wattmeter. Connect J1 Earth to ground for safety.
3. Connect the DC voltmeter as shown in Figure 7.

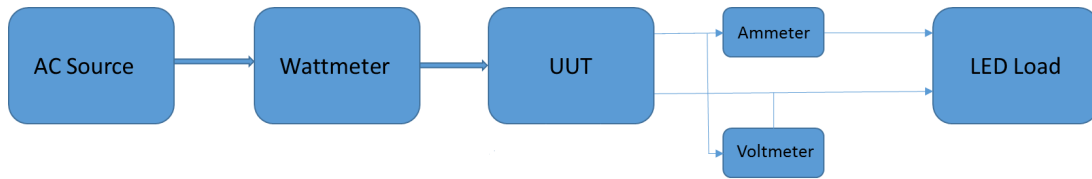

NOTE: Unless otherwise specified, all voltage measurements are taken at the terminals of the UUT.

Figure 7. Test Set Up

## Constant Current Regulation

## Functional Test Procedure

1. Set the LED Load between 36 and 40 Volts.
2. Set the input voltage as indicated. **Caution: Do not touch the ECA once it is energized because there are hazardous voltages present.**

## Max Load:

- ♦ Enter 'P' or 'F' in column depending on test result

|       | Input Power | Power Factor |                  | Output Current |                              | Output Voltage |
|-------|-------------|--------------|------------------|----------------|------------------------------|----------------|
|       |             | Reading      | Pass/Fail (>0.9) | Reading        | Pass/Fail (1.35 A to 1.55 A) |                |
| 90 V  |             |              |                  |                |                              |                |
| 120 V |             |              |                  |                |                              |                |
| 230 V |             |              |                  |                |                              |                |
| 265 V |             |              |                  |                |                              |                |

$$\text{Efficiency} = \frac{V_{\text{out}} \times I_{\text{out}}}{P_{\text{in}}} \times 100\% \quad (\text{eq. 2})$$

3. Set input voltage to zero after completing tests above.

## Constant Voltage Regulation

## Functional Test Procedure

1. Remove LED load and replace with 100  $\Omega$  resistor to J6 'LED+' and 'LED-' terminals.
2. Set the input voltage as indicated. **Caution: Do not touch the ECA once it is energized because there are hazardous voltages present.**

- ♦ Enter 'P' or 'F' in column depending on test result

| Input Voltage | Output Voltage |                      |
|---------------|----------------|----------------------|
|               | Reading        | Pass/Fail (<43 V dc) |
| 120 V         |                |                      |
| 230 V         |                |                      |

3. Turn off all power sources at end of test.

# NCL30388LED1GEVB

## TEST DATA

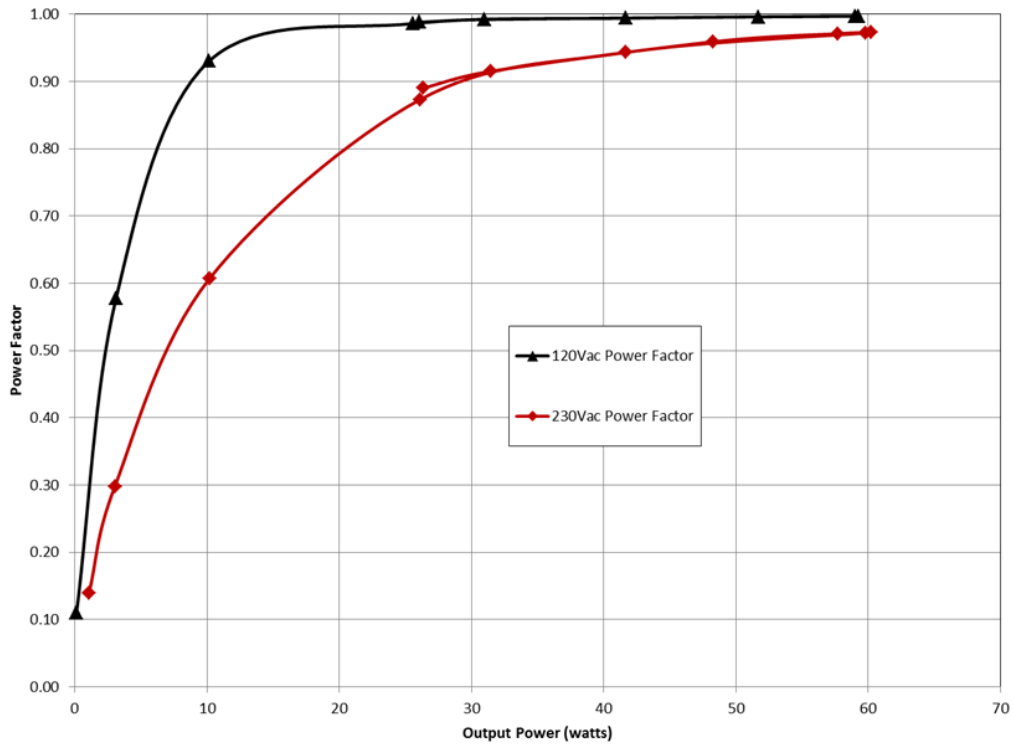


Figure 8. Power Factor over Load

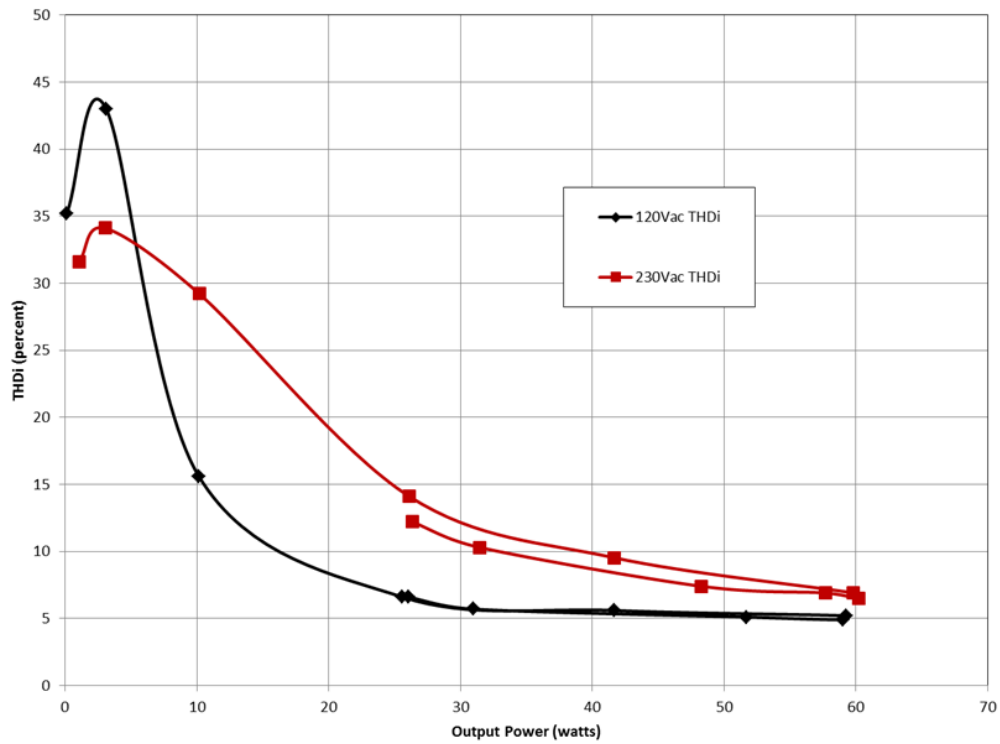


Figure 9. THD over Load

# NCL30388LED1GEVB

## TEST DATA

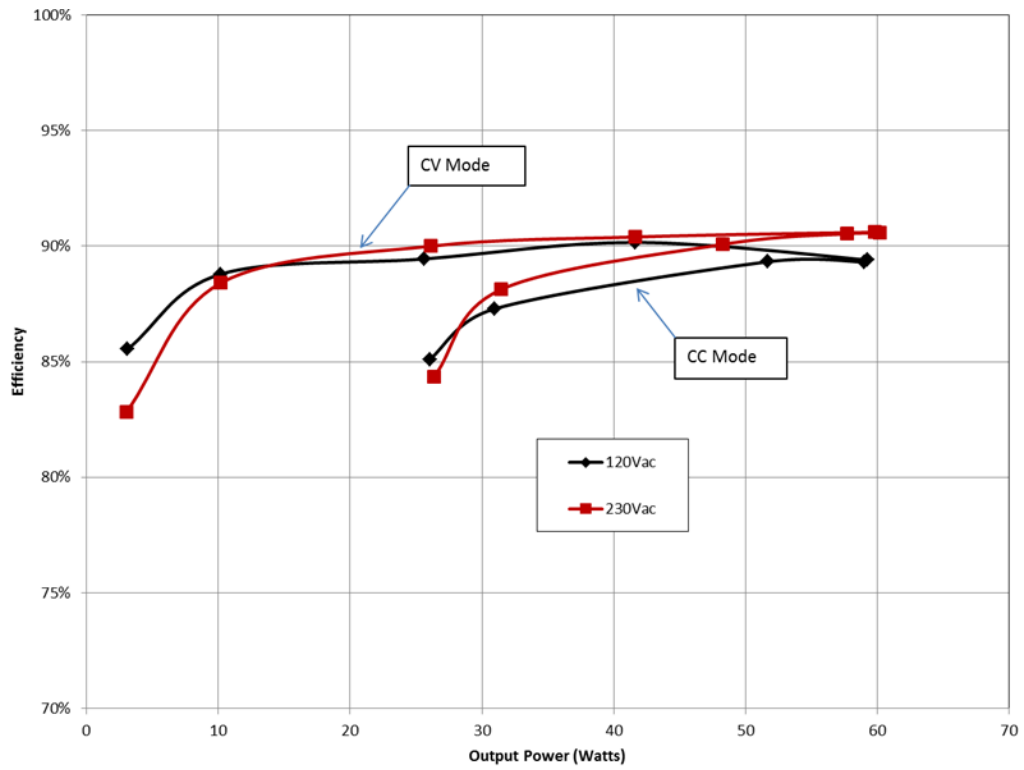


Figure 11. Efficiency

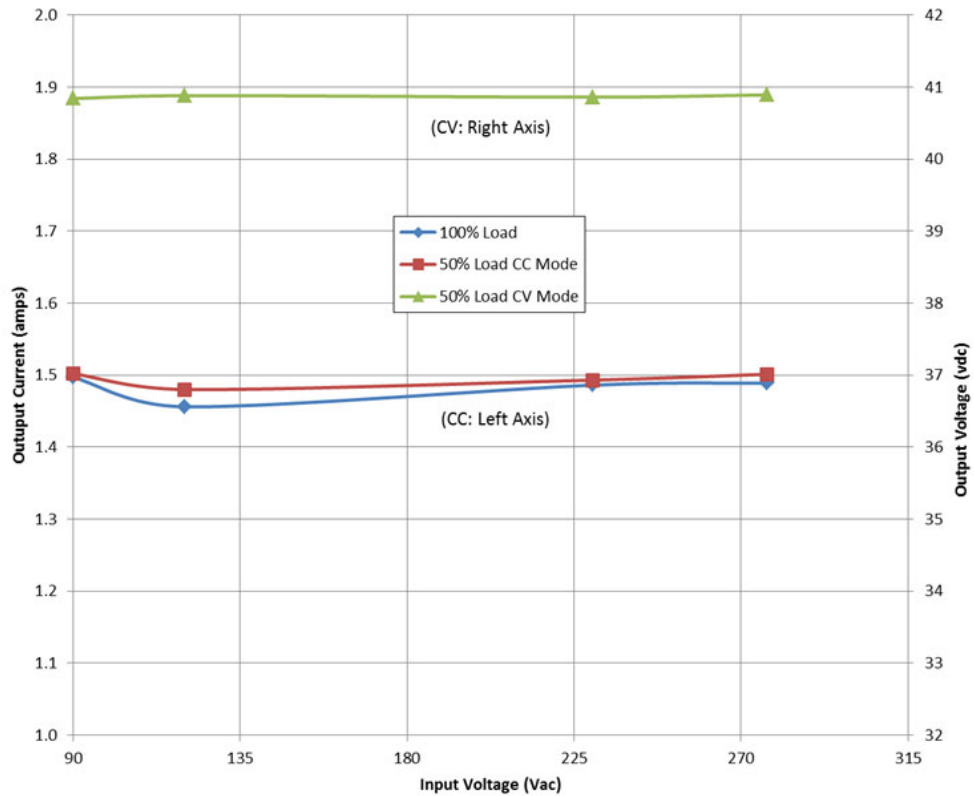


Figure 10. Regulation over Line

# NCL30388LED1GEVB

## TEST DATA

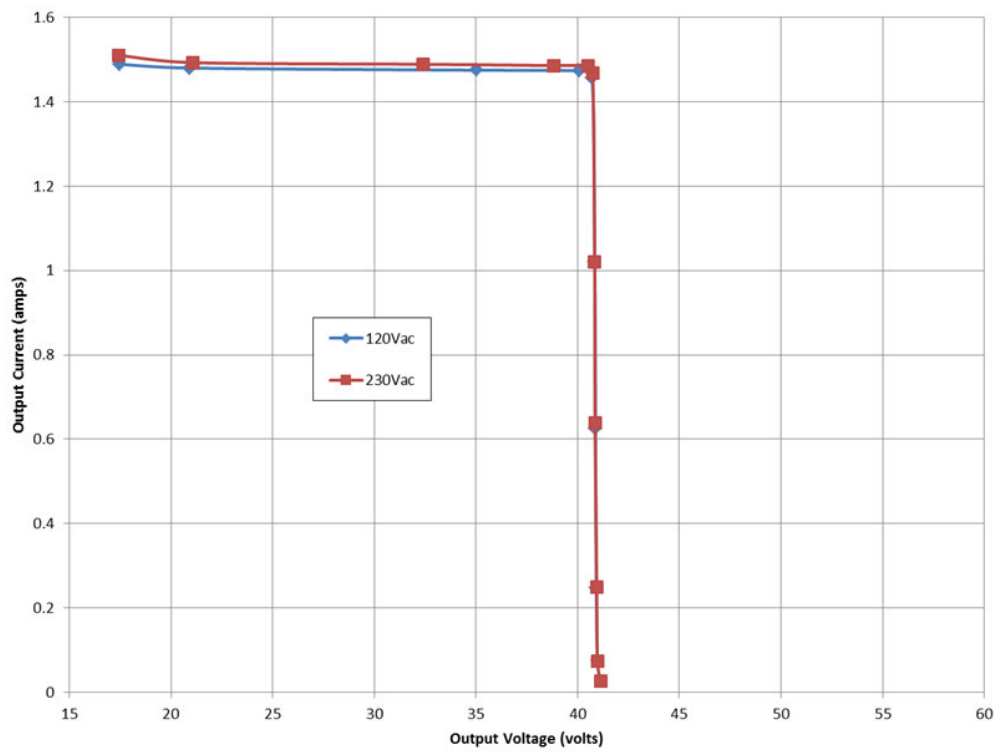


Figure 12. Output Regulation

TEST DATA

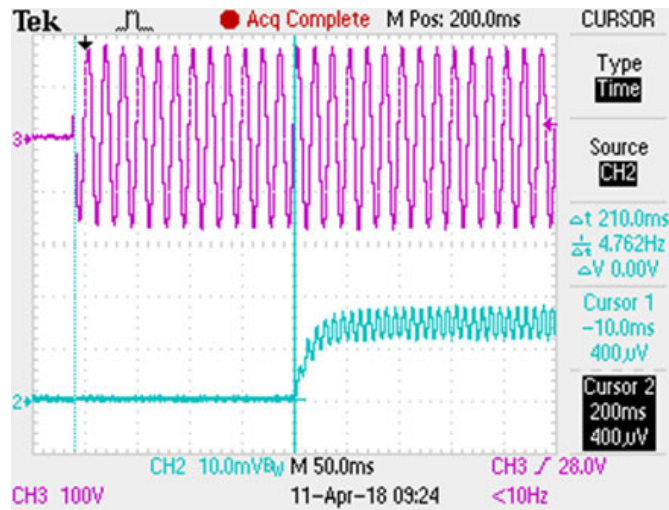


Figure 13. Start Up with AC Applied 120 V

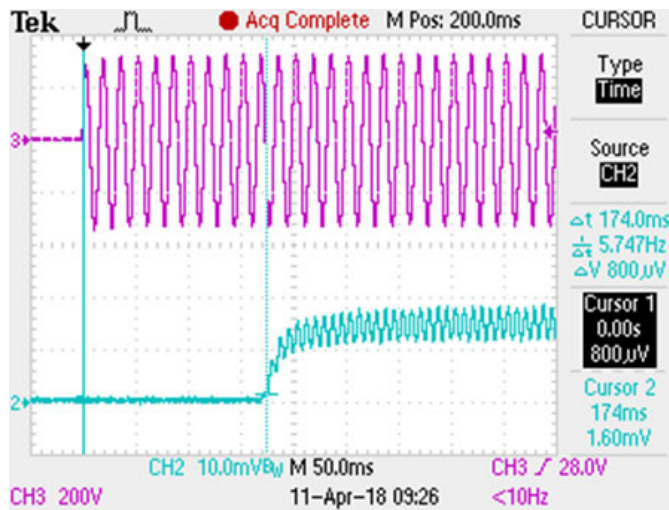


Figure 14. Start Up with AC Applied 230 V

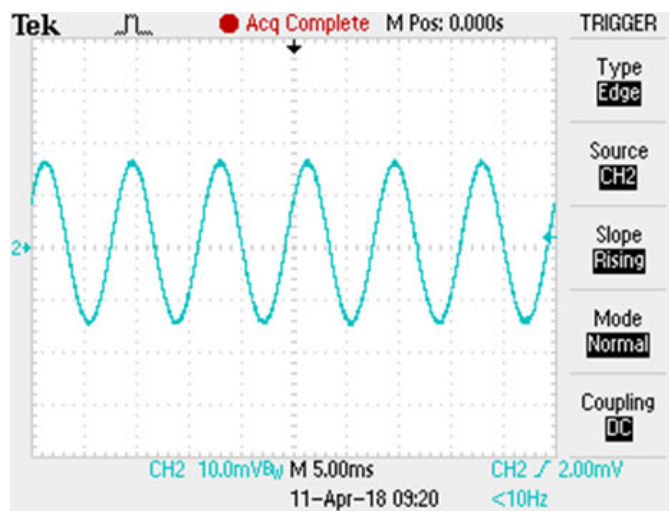


Figure 15. Output Ripple 42% P-P

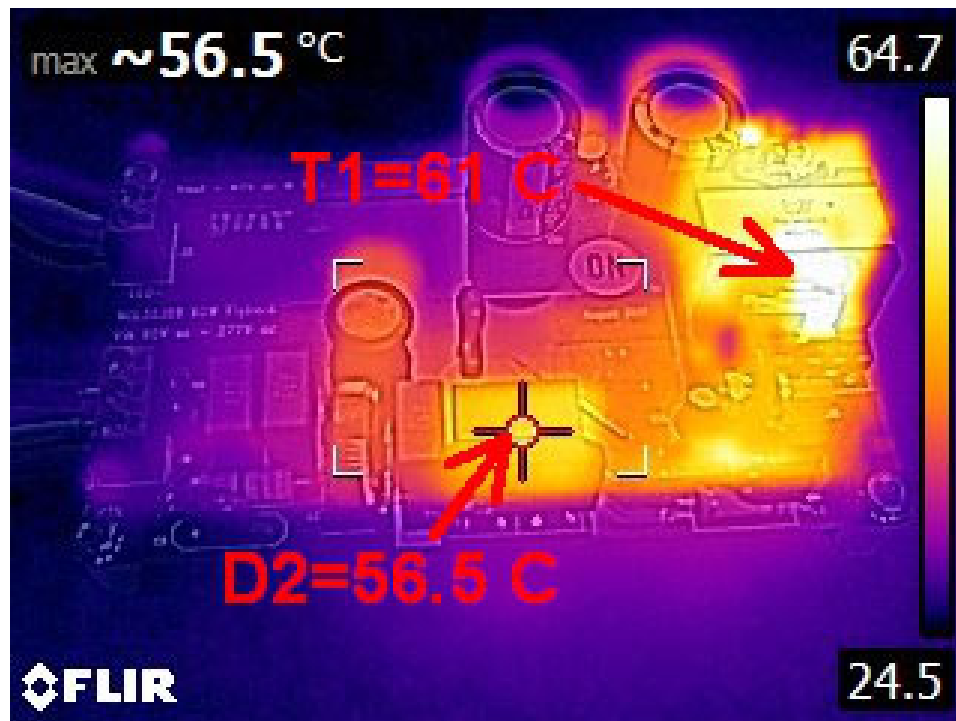


Figure 16. Thermal Image Side View

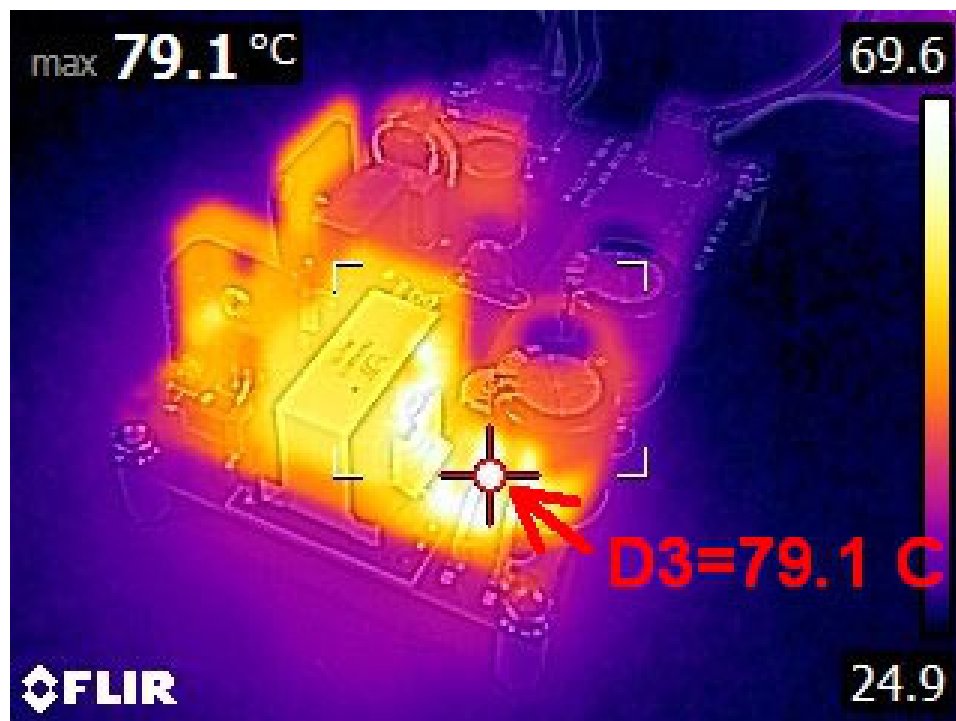


Figure 17. Thermal Image End View

# NCL30388LED1GEVB

**Table 1. BILL OF MATERIALS**

| Quantity | Reference | Part              | Manufacturer     | Part Number        |
|----------|-----------|-------------------|------------------|--------------------|
| 1        | C17       | 22 nF             | Wurth            | 885012207094       |
| 1        | C18       | 220 nF            | Wurth            | 885012207100       |
| 3        | C6,C7,C8  | 150 nF            | Wurth            | 890334023025       |
| 2        | C9,C13    | 2.2 nF            | Murata           | DE1E3KX222MA4BP01F |
| 1        | C10       | 470 nF            | Wurth            | 890334025039       |
| 2        | C11,C12   | 1000 $\mu$ F 50 V | Wurth            | 860160680034       |
| 1        | C14       | 10 $\mu$ F 35 V   | Nichicon         | USV1V100MFD        |
| 1        | C15       | 4.7 nF 630 V      | Kemet            | B32529C8472J000    |
| 1        | D2        | GBU4J             | On Semiconductor | GBU4J              |
| 2        | D3,D5     | MUR440RLG         | On Semiconductor | MUR440RLG          |
| 1        | D4        | ES1JFL            | On Semiconductor | ES1JFL             |
| 1        | D6        | MURS160T3G        | On Semiconductor | MURS160T3G         |
| 1        | F1        | 1A6 Slo           | Belfuse          | UMTS 1.6           |
| 1        | J1        | CON3              | Wurth            | 691101710003       |
| 1        | J6        | CON2              | Wurth            | 691101710002       |
| 1        | L1        | 820 $\mu$ H       | Abracon          | AIUR-06-821K       |
| 1        | L2        | 5 mH              | Murata           | 51505C             |
| 1        | L3        | 10 $\mu$ H        | Wurth            | 744779100          |
| 1        | QFET1     | FCPF380N65FL1     | ON Semiconductor | FCPF380N65FL1      |
| 1        | Heatsink  |                   | Aavid Thermalloy | 507302B00000G      |
| 1        | R19       | 100 k $\Omega$    | Yageo            | RC0805FR-07100KL   |
| 1        | R8        | 320 V             | Littelfuse       | V320LA10P          |
| 1        | R9        | 47 k $\Omega$ 2 W | Yageo            | RSF200JB-73-47K    |
| 1        | R10       | 56 k $\Omega$     | Yageo            | RC0805FR-0756KL    |
| 1        | R11       | 82 k $\Omega$     | Yageo            | RC0805FR-0782KL    |
| 1        | R12       | 7.5 k $\Omega$    | Yageo            | RC0805FR-077K5L    |
| 1        | R13       | 620 $\Omega$      | Yageo            | RC0805FR-07620RL   |
| 1        | R14       | 0.36 $\Omega$ 1 W | Panasonic        | ERJ-1TRQFR36U      |
| 1        | R15       | 0.39 $\Omega$ 1 W | Yageo            | RL2512FK-070R39L   |
| 1        | R17       | 47 $\Omega$ 2 W   | Yageo            | RSF200JB-73-47R    |
| 1        | R18       | 10 $\Omega$       | Yageo            | RC0805FR-0710RL    |
| 1        | T1        | 750342613         | Wurth            | 750342613          |
| 1        | U2        | NCL30388          | On Semiconductor | NCL30388A1         |

NOTES: All Components to comply with RoH 2002/95/EC

**onsemi**, **onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

The evaluation board/kit (research and development board/kit) (hereinafter the "board") is not a finished product and is not available for sale to consumers. The board is only intended for research, development, demonstration and evaluation purposes and will only be used in laboratory/development areas by persons with an engineering/technical training and familiar with the risks associated with handling electrical/mechanical components, systems and subsystems. This person assumes full responsibility/liability for proper and safe handling. Any other use, resale or redistribution for any other purpose is strictly prohibited.

**THE BOARD IS PROVIDED BY ONSEMI TO YOU "AS IS" AND WITHOUT ANY REPRESENTATIONS OR WARRANTIES WHATSOEVER. WITHOUT LIMITING THE FOREGOING, ONSEMI (AND ITS LICENSORS/SUPPLIERS) HEREBY DISCLAIMS ANY AND ALL REPRESENTATIONS AND WARRANTIES IN RELATION TO THE BOARD, ANY MODIFICATIONS, OR THIS AGREEMENT, WHETHER EXPRESS, IMPLIED, STATUTORY OR OTHERWISE, INCLUDING WITHOUT LIMITATION ANY AND ALL REPRESENTATIONS AND WARRANTIES OF MERCHANTABILITY, FITNESS FOR A PARTICULAR PURPOSE, TITLE, NON-INFRINGEMENT, AND THOSE ARISING FROM A COURSE OF DEALING, TRADE USAGE, TRADE CUSTOM OR TRADE PRACTICE.**

**onsemi** reserves the right to make changes without further notice to any board.

You are responsible for determining whether the board will be suitable for your intended use or application or will achieve your intended results. Prior to using or distributing any systems that have been evaluated, designed or tested using the board, you agree to test and validate your design to confirm the functionality for your application. Any technical, applications or design information or advice, quality characterization, reliability data or other services provided by **onsemi** shall not constitute any representation or warranty by **onsemi**, and no additional obligations or liabilities shall arise from **onsemi** having provided such information or services.

**onsemi** products including the boards are not designed, intended, or authorized for use in life support systems, or any FDA Class 3 medical devices or medical devices with a similar or equivalent classification in a foreign jurisdiction, or any devices intended for implantation in the human body. You agree to indemnify, defend and hold harmless **onsemi**, its directors, officers, employees, representatives, agents, subsidiaries, affiliates, distributors, and assigns, against any and all liabilities, losses, costs, damages, judgments, and expenses, arising out of any claim, demand, investigation, lawsuit, regulatory action or cause of action arising out of or associated with any unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of any products and/or the board.

This evaluation board/kit does not fall within the scope of the European Union directives regarding electromagnetic compatibility, restricted substances (RoHS), recycling (WEEE), FCC, CE or UL, and may not meet the technical requirements of these or other related directives.

**FCC WARNING** – This evaluation board/kit is intended for use for engineering development, demonstration, or evaluation purposes only and is not considered by **onsemi** to be a finished end product fit for general consumer use. It may generate, use, or radiate radio frequency energy and has not been tested for compliance with the limits of computing devices pursuant to part 15 of FCC rules, which are designed to provide reasonable protection against radio frequency interference. Operation of this equipment may cause interference with radio communications, in which case the user shall be responsible, at its expense, to take whatever measures may be required to correct this interference.

**onsemi** does not convey any license under its patent rights nor the rights of others.

**LIMITATIONS OF LIABILITY:** **onsemi** shall not be liable for any special, consequential, incidental, indirect or punitive damages, including, but not limited to the costs of requalification, delay, loss of profits or goodwill, arising out of or in connection with the board, even if **onsemi** is advised of the possibility of such damages. In no event shall **onsemi**'s aggregate liability from any obligation arising out of or in connection with the board, under any theory of liability, exceed the purchase price paid for the board, if any.

The board is provided to you subject to the license and other terms per **onsemi**'s standard terms and conditions of sale. For more information and documentation, please visit [www.onsemi.com](http://www.onsemi.com).

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at [www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)