

# NCP1593A, NCP1593B

## Synchronous Buck Regulator

### 1 MHz, 3 A

The NCP1593 is a fixed 1 MHz, high-output-current, synchronous PWM converter that integrates a low-resistance, high-side P-channel MOSFET and a low-side N-channel MOSFET. The NCP1593 utilizes internally compensated current mode control to provide good transient response, ease of implementation and excellent loop stability. It regulates input voltages from 4.0 V to 5.5 V down to an output voltage as low as 0.6 V and is able to supply up to 3 A of load current.

The NCP1593 includes an internally fixed switching frequency ( $F_{sw}$ ), and an internal soft-start to limit inrush current. Other features include cycle-by-cycle current limiting, 100% duty cycle operation, short-circuit protection, power saving mode and thermal shutdown.

#### Features

- Wide Input Voltage Range: from 4.0 V to 5.5 V
- Internal 90 m $\Omega$  High-Side P-Channel MOSFET and 60 m $\Omega$  Low-Side N-Channel MOSFET
- Fixed 1 MHz Switching Frequency
- Cycle-by-Cycle Current Limiting
- Hiccup Mode Short-Circuit Protection
- Overtemperature Protection
- Internal Soft-Start
- Start-up with Pre-Biased Output Load
- Adjustable Output Voltage Down to 0.6 V
- Diode Emulation During Light Load
- 100% Duty Cycle Operation to Extend the Battery Life
- These are Pb-Free Devices

#### Applications

- Set-Top Boxes
- DVD Drives and HDD
- LCD Monitors and TVs
- Cable Modems
- USB Modems
- Telecom/Networking/Datacom Equipment




ON Semiconductor®

<http://onsemi.com>



DFN10  
CASE 485C


#### MARKING DIAGRAMS




A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
■ = Pb-Free Package

(Note: Microdot may be in either location)

#### PIN CONNECTIONS



NCP1593A  
(Top View)



NCP1593B  
(Top View)

#### ORDERING INFORMATION

| Device        | Package            | Shipping†             |
|---------------|--------------------|-----------------------|
| NCP1593AMNTWG | DFN10<br>(Pb-Free) | 3000 / Tape &<br>Reel |
| NCP1593BMNTWG | DFN10<br>(Pb-Free) | 3000 / Tape &<br>Reel |

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

# NCP1593A, NCP1593B

## BLOCK DIAGRAM

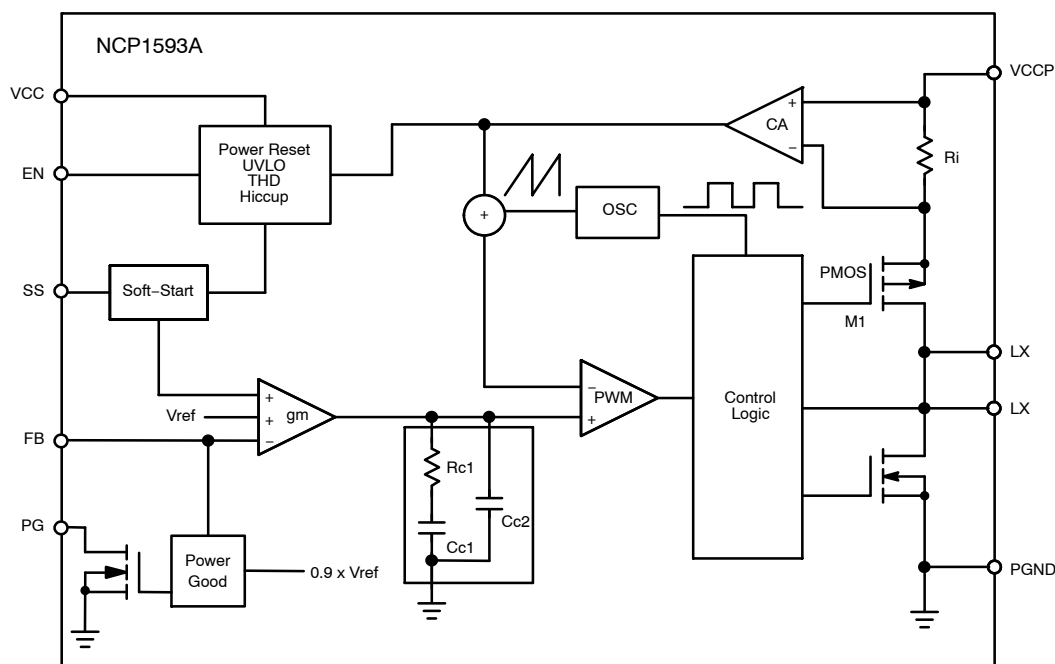


Figure 1. Block Diagram

## PIN DESCRIPTIONS

| Pin No | Symbol           | Description                                                                                                                                                                                               |
|--------|------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| 1      | NC / LX          | No connect pin for NCP1593A. The user may ground this pin or leave it floating. / LX pin for NCP1593B                                                                                                     |
| 2, 3   | LX               | The drains of the internal MOSFETs. The output inductor should be connected to these pins.                                                                                                                |
| 4      | PG               | Open drain output from the Power Good logic. When the FB voltage is within regulation, this is a high impedance pin. Otherwise it is pulled low.                                                          |
| 5      | EN               | Logic input to enable the part. Logic high to turn on the part and a logic low to shut off the part. An internal pullup forces the part into an enable state when no external bias is present on the pin. |
| 6      | FB               | Feedback input pin of the Error Amplifier. Connect a resistor divider from the converter's output voltage to this pin to set the converter's regulated voltage.                                           |
| 7      | SS / NC          | An external capacitor on this pin sets the soft-start ramp time. Leaving this pin open sets the soft-start time at 500 $\mu$ s. For NCP1593B this pin is a no connect and should be left floating.        |
| 8      | V <sub>CC</sub>  | Input supply pin for internal bias circuitry. Connect a 0.1 $\mu$ F ceramic bypass capacitor to this pin. Directly connect the V <sub>CC</sub> pin to the V <sub>CCP</sub> pin on the board.              |
| 9, 10  | V <sub>CCP</sub> | Input for the power stage                                                                                                                                                                                 |
| EP     | GND              | Exposed pad of the package provides both electrical contact to the ground and good thermal contact to the PCB. This pad must be soldered to the PCB for proper operation.                                 |

# NCP1593A, NCP1593B

## APPLICATION CIRCUIT

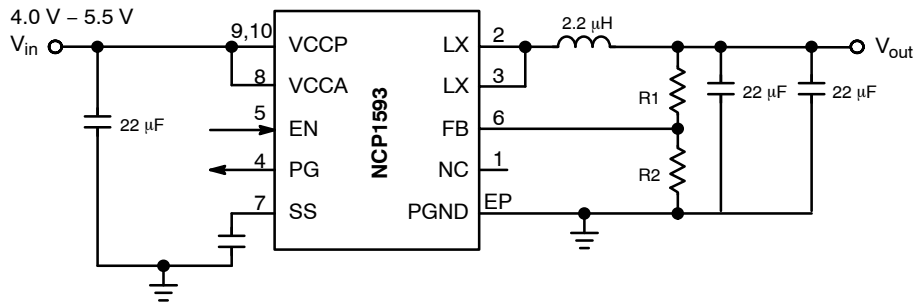


Figure 2. Recommended Application Circuit

## ABSOLUTE MAXIMUM RATINGS

| Rating                                        | Symbol          | Value                                                                          | Unit |
|-----------------------------------------------|-----------------|--------------------------------------------------------------------------------|------|
| Power Supply Pin (Pins 8, 9, 10) to GND       | $V_{in}$        | 6.5<br>-0.3 (DC)<br>-1.0 (t < 100 ns)                                          | V    |
| LX to GND                                     |                 | $V_{in} + 0.7$<br>$V_{in} + 1.0$ (t < 20 ns)<br>-0.7 (DC)<br>-5.0 (t < 100 ns) | V    |
| All other pins                                |                 | 6.0<br>-0.3 (DC)<br>-1.0 (t < 100 ns)                                          | V    |
| Operating Ambient Temperature Range (Note 1)  | $T_A$           | -40 to +85                                                                     | °C   |
| Operating Junction Temperature Range (Note 1) | $T_J$           | -40 to +125                                                                    | °C   |
| Maximum Junction Temperature                  | $T_{J(MAX)}$    | +150                                                                           | °C   |
| Storage Temperature Range                     | $T_S$           | -55 to +150                                                                    | °C   |
| Thermal Resistance Junction-to-Air (Note 2)   | $R_{\theta JA}$ | 68                                                                             | °C/W |

Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

- The maximum package power dissipation limit must not be exceeded.

$$P_D = \frac{T_{J(max)} - T_A}{R_{\theta JA}}$$

- $R_{\theta JA}$  measured on approximately 1x1 inch sq. of 1 oz. Copper FR-4 or G-10 board.

# NCP1593A, NCP1593B

## ELECTRICAL CHARACTERISTICS (−40°C < T<sub>J</sub> < 125°C, V<sub>CC</sub> = 4.0 V – 5.5 V, for min/max values unless noted otherwise)

| Parameter                         | Symbol                | Test Conditions | Min | Typ | Max | Unit |
|-----------------------------------|-----------------------|-----------------|-----|-----|-----|------|
| Input Voltage Range               | V <sub>IN</sub>       |                 | 4.0 |     | 5.5 | V    |
| V <sub>CC</sub> UVLO Threshold    | V <sub>UVLO</sub>     |                 | 2.4 | 2.5 | 2.9 | V    |
| UVLO Hysteresis                   | V <sub>UVLO_hys</sub> |                 |     | 320 |     | mV   |
| V <sub>CC</sub> Quiescent Current | I <sub>INVCC</sub>    |                 |     | 1.0 | 1.5 | mA   |
| VCCP Quiescent Current            | I <sub>INVCCP</sub>   |                 |     | 20  | 50  | μA   |
| Shutdown Supply Current           | I <sub>QSHDN</sub>    |                 |     | 1.8 | 3.0 | μA   |

### FEEDBACK VOLTAGE

|                                           |                 |                                  |       |     |       |    |
|-------------------------------------------|-----------------|----------------------------------|-------|-----|-------|----|
| Reference Voltage                         | V <sub>FB</sub> |                                  | 0.591 | 0.6 | 0.609 | V  |
| Reference Voltage                         | V <sub>FB</sub> | T <sub>J</sub> = 25°C            | 0.594 | 0.6 | 0.606 | V  |
| Feedback Input Bias Current               | I <sub>FB</sub> |                                  |       | 10  | 100   | nA |
| Feedback Voltage Line Regulation (Note 3) |                 | V <sub>CC</sub> = 4.0 V to 5.5 V |       |     | −65   | dB |

### PWM

|                                 |                    |                                              |  |    |     |    |
|---------------------------------|--------------------|----------------------------------------------|--|----|-----|----|
| Maximum Duty Cycle (Regulating) | d.c.MAX            |                                              |  | 95 |     | %  |
| Maximum Duty Cycle (LDO mode)   | d.c.LDO            | V <sub>out</sub> > d.c.MAX * V <sub>IN</sub> |  |    | 100 | %  |
| Minimum Controllable On Time    | t <sub>ONmin</sub> |                                              |  | 35 |     | ns |

### Current Limit

|                                       |                  |                                                |  |     |  |   |
|---------------------------------------|------------------|------------------------------------------------|--|-----|--|---|
| Cycle-by-cycle Current Limit (Note 3) | I <sub>LIM</sub> | V <sub>CC</sub> = 5.0 V, T <sub>J</sub> = 25°C |  | 5.1 |  | A |
|---------------------------------------|------------------|------------------------------------------------|--|-----|--|---|

### Oscillator

|                     |                 |  |      |     |      |     |
|---------------------|-----------------|--|------|-----|------|-----|
| Switching Frequency | f <sub>SW</sub> |  | 0.87 | 1.0 | 1.13 | MHz |
|---------------------|-----------------|--|------|-----|------|-----|

### MOSFET's

|                                |                    |                                                   |  |    |     |    |
|--------------------------------|--------------------|---------------------------------------------------|--|----|-----|----|
| High-Side MOSFET On Resistance | R <sub>DSonH</sub> | I <sub>DS</sub> = 100 mA, V <sub>IN</sub> = 5.0 V |  | 90 | 190 | mΩ |
| High-Side MOSFET Leakage       | I <sub>lkgH</sub>  | LX = 0 V                                          |  |    | 10  | μA |
| Low-Side MOSFET On Resistance  | R <sub>DSonL</sub> | I <sub>DS</sub> = 100 mA, V <sub>IN</sub> = 5.0 V |  | 60 | 90  | mΩ |
| Low-Side MOSFET Leakage        | I <sub>lkgL</sub>  | LX = 5 V                                          |  |    | 10  | μA |

### POWER GOOD

|                                     |                    |                          |      |      |     |    |
|-------------------------------------|--------------------|--------------------------|------|------|-----|----|
| Power Good Rising Threshold         | V <sub>PGH</sub>   |                          | 0.51 | 0.54 |     | V  |
| Power Good Falling Threshold        | V <sub>PHL</sub>   |                          | 0.48 | 0.51 |     | V  |
| Power Good Hysteresis (High-to-Low) | V <sub>PGhys</sub> |                          |      | 30   |     | mV |
| Power Good Pulldown Voltage         | V <sub>RPg</sub>   | I <sub>PG</sub> = 2.5 mA |      | 130  | 250 | mV |

### ENABLE

|                       |                    |  |     |     |     |    |
|-----------------------|--------------------|--|-----|-----|-----|----|
| Enable High Threshold | V <sub>ENHI</sub>  |  | 1.4 |     |     | V  |
| Enable Low Threshold  | V <sub>ENLO</sub>  |  |     |     | 0.4 | V  |
| Enable Hysteresis     | V <sub>ENhys</sub> |  |     | 200 |     | mV |
| Enable Pullup Current | I <sub>EN</sub>    |  |     | 1.4 | 3.0 | μA |

### Soft-Start

|                              |                 |                                      |      |                     |      |    |
|------------------------------|-----------------|--------------------------------------|------|---------------------|------|----|
| Default Soft-start Ramp Time | t <sub>SS</sub> | SS = open; f <sub>SW</sub> = 1MHz    | 0.5  | 0.58                | 0.65 | ms |
| Maximum Soft-start Ramp time | t <sub>SS</sub> | SS = max cap; f <sub>SW</sub> = 1MHz |      | 10                  |      | ms |
| Hiccup Timer                 |                 |                                      |      | 4 * t <sub>SS</sub> |      | ms |
| Soft-start Current           | I <sub>SS</sub> |                                      | 0.51 | 0.7                 | 0.87 | μA |

### Thermal Shutdown

|                             |  |  |  |     |  |    |
|-----------------------------|--|--|--|-----|--|----|
| Thermal Shutdown Threshold  |  |  |  | 185 |  | °C |
| Thermal Shutdown Hysteresis |  |  |  | 30  |  | °C |

3. Guaranteed by Characterization.

TYPICAL CHARACTERISTICS

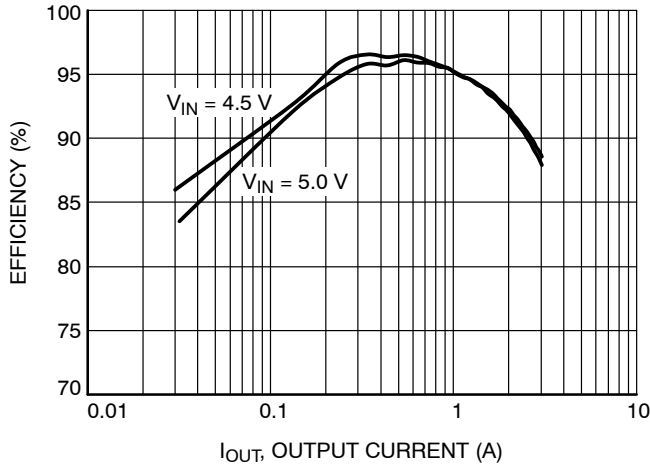


Figure 3. Efficiency vs. Output Current (3.3 V)

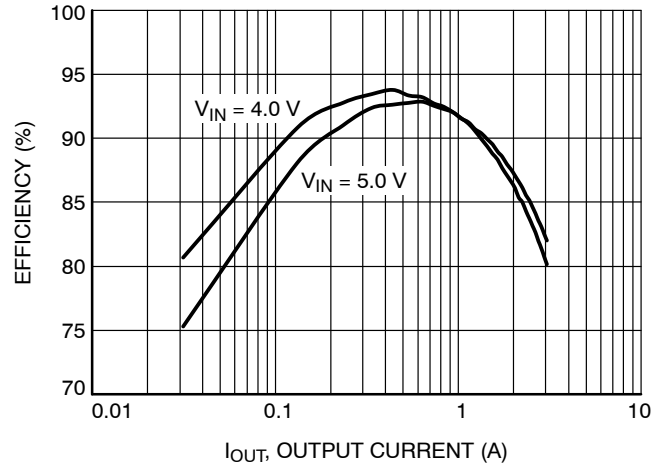


Figure 4. Efficiency vs. Output Current (1.8 V)

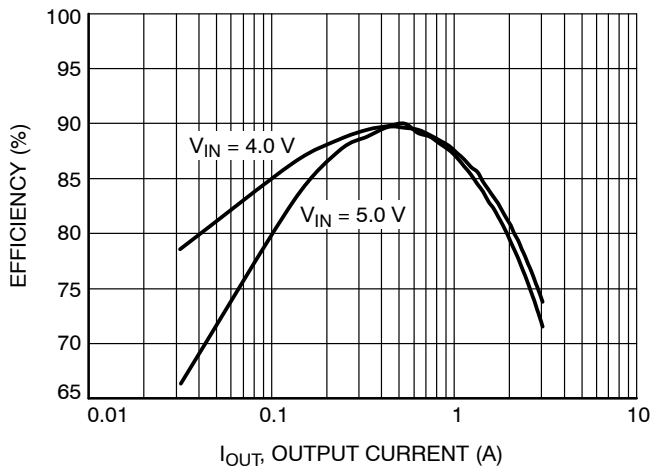


Figure 5. Efficiency vs. Output Current (1.05 V)

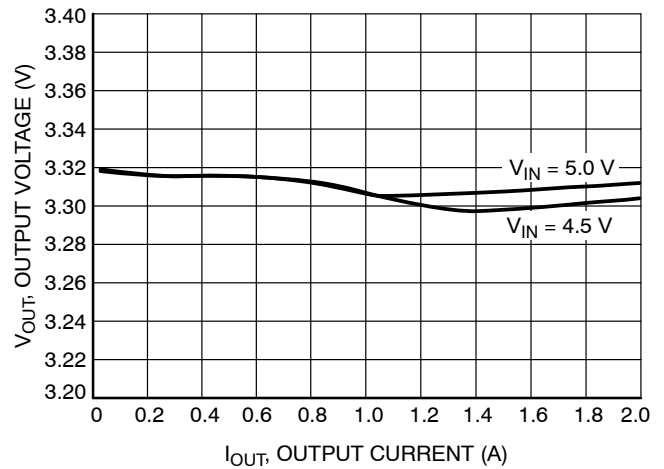


Figure 6. Load Regulation (3.3 V)

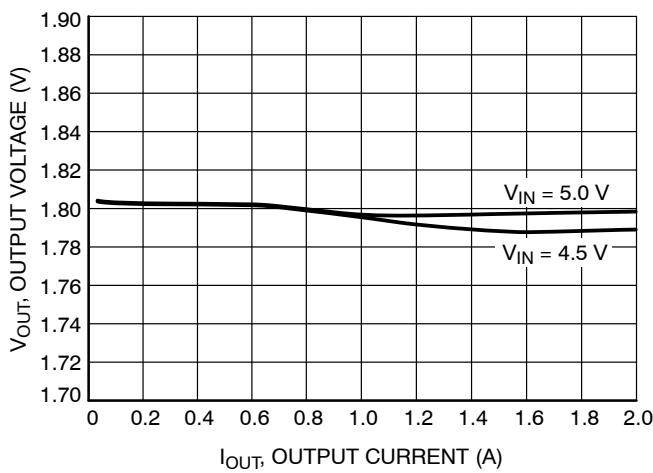


Figure 7. Load Regulation (1.8 V)



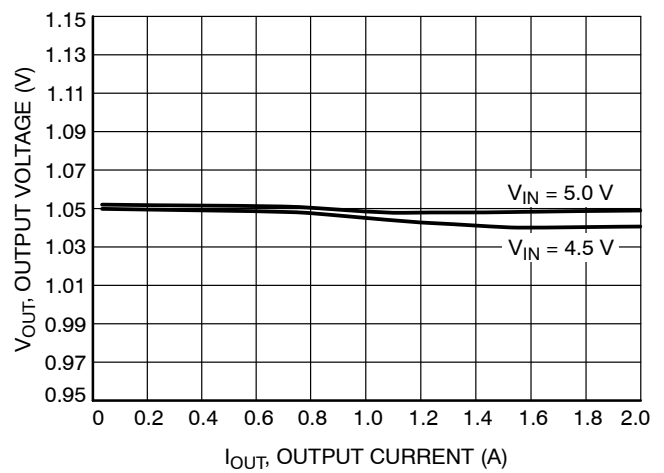


Figure 8. Load Regulation (1.05 V)


## TYPICAL CHARACTERISTICS

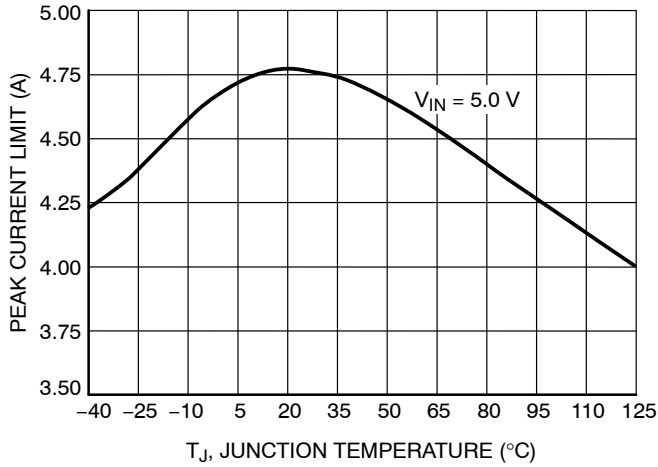


**Figure 9. Current Limit vs. Temperature**

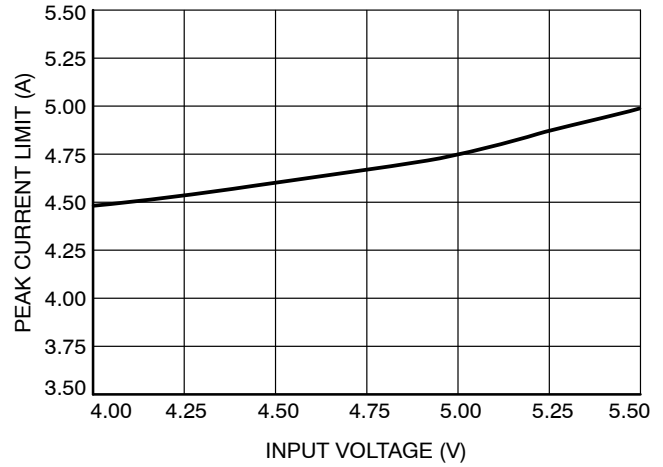

**Figure 10. Current Limit vs. Input Voltage**

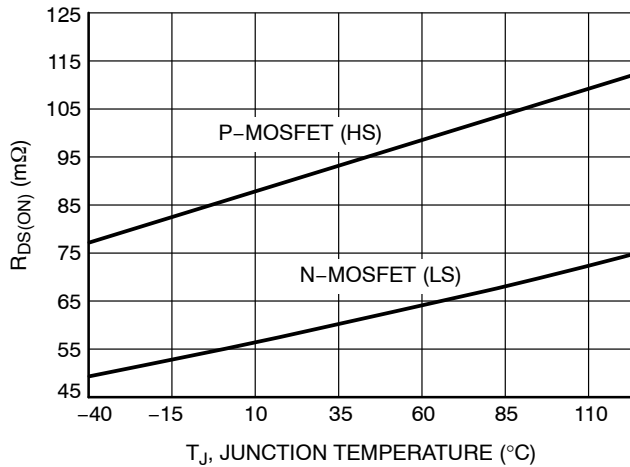


**Figure 11.  $R_{DS(ON)}$  vs. Temperature**

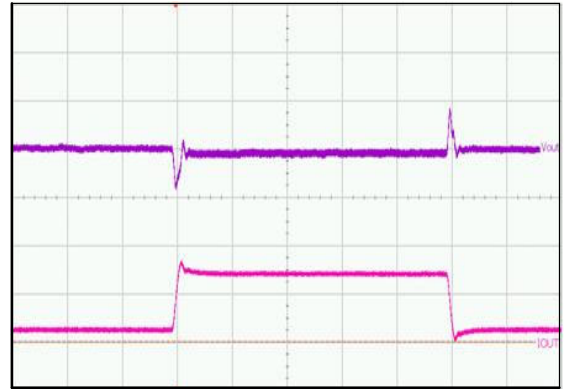


(VIN = 5 V, VOUT = 1.05 V, IOUT = 0.5 A to 3.0 A)  
Upper Trace: Output Voltage, 50 mV / div  
Lower Trace: Output Current, 2 A / div  
Time = 200 μs/div

**Figure 12. Load Transient Response**

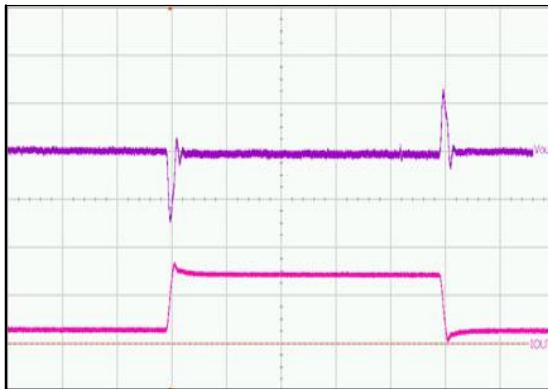

(VIN = 5 V, VOUT = 1.05 V, IOUT = 0.5 A to 3.0 A)  
Upper Trace: Output Voltage, 50 mV / div  
Lower Trace: Output Current, 2 A / div  
Time = 200 μs/div


**Figure 13. Load Transient Response**

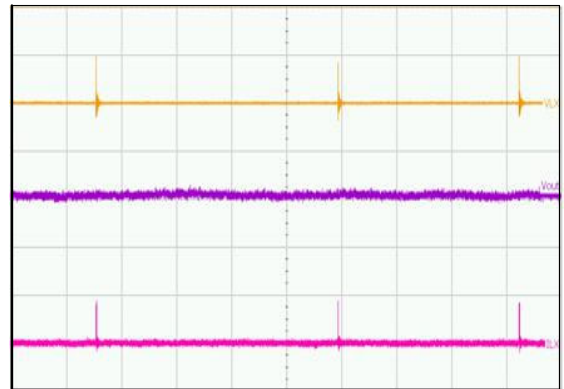

(VIN = 5 V, VOUT = 1.05 V, IOUT = 0 A)  
Upper Trace: LX Pin Switching Waveforms, 5 V / div  
Middle Trace: Output Voltage, 20 mV / div  
Lower Trace: Inductor Current, 100 mA / div  
Time = 20 μs / div


**Figure 14. No Load Switching (1.05 V)**

## TYPICAL CHARACTERISTICS

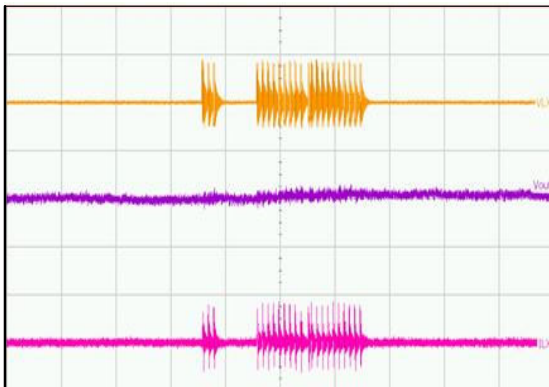


(VIN = 5 V, VOUT = 1.8 V, IOUT = 0 A)  
 Upper Trace: LX Pin Switching Waveforms, 5 V / div  
 Middle Trace: Output Voltage, 20 mV / div  
 Lower Trace: Inductor Current, 100 mA / div  
 Time = 10 μs / div

**Figure 15. No Load Switching (1.8 V)**

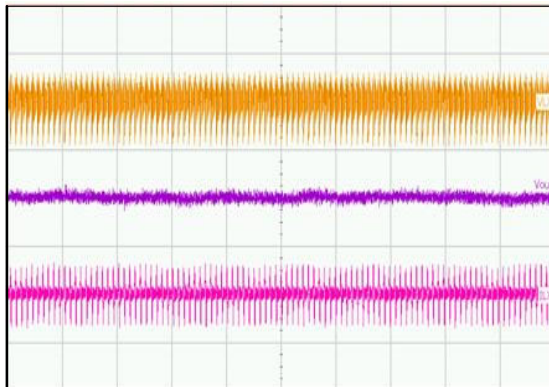


(VIN = 5 V, VOUT = 3.3 V, IOUT = 0 A)  
 Upper Trace: LX Pin Switching Waveforms, 5 V / div  
 Middle Trace: Output Voltage, 20 mV / div  
 Lower Trace: Inductor Current, 200 mA / div  
 Time = 10 μs / div

**Figure 16. No Load Switching (3.3 V)**

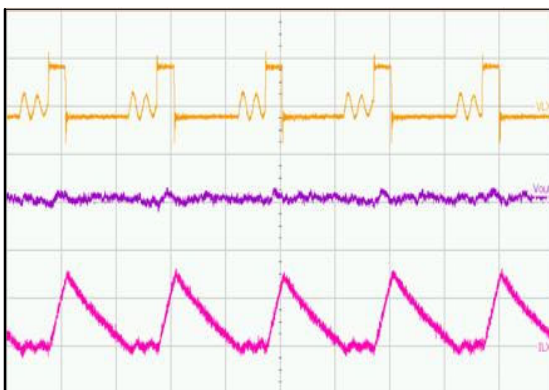


(VIN = 5 V, VOUT = 1.05 V, IOUT = 100 mA)  
 Upper Trace: LX Pin Switching Waveforms, 5 V / div  
 Middle Trace: Output Voltage, 20 mV / div  
 Lower Trace: Inductor Current, 200 mA / div  
 Time = 500 ns / div

**Figure 17. DCM Switching (1.05 V)**

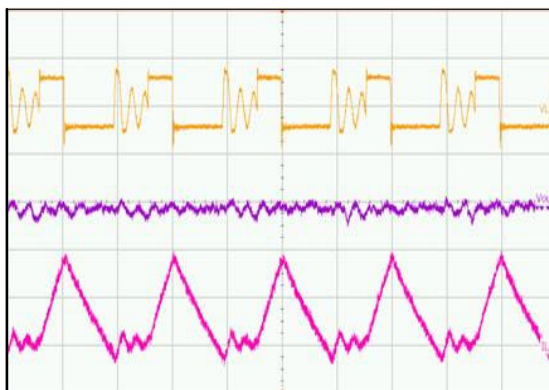


(VIN = 5 V, VOUT = 1.8 V, IOUT = 150 mA)  
 Upper Trace: LX Pin Switching Waveforms, 5 V / div  
 Middle Trace: Output Voltage, 20 mV / div  
 Lower Trace: Inductor Current, 200 mA / div  
 Time = 500 ns / div

**Figure 18. DCM Switching (1.8 V)**

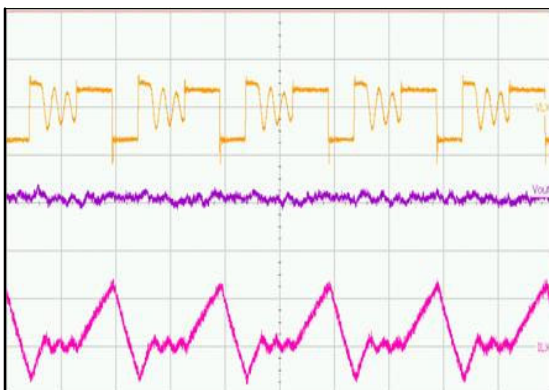

(VIN = 5 V, VOUT = 3.3 V, IOUT = 100 mA)  
 Upper Trace: LX Pin Switching Waveforms, 5 V / div  
 Middle Trace: Output Voltage, 20 mV / div  
 Lower Trace: Inductor Current, 200 mA / div  
 Time = 500 ns / div

**Figure 19. DCM Switching (3.3 V)**

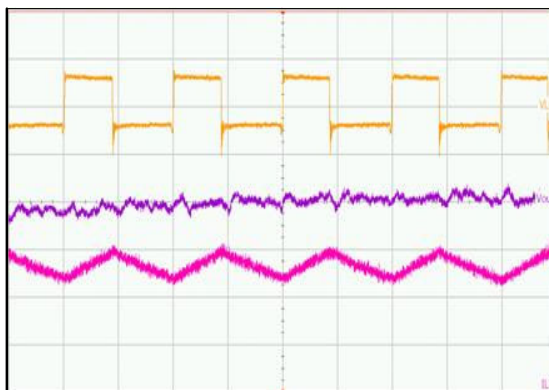

(VIN = 5 V, VOUT = 1.8 V, IOUT = 3 A)  
 Upper Trace: LX Pin Switching Waveforms, 5 V / div  
 Middle Trace: Output Voltage, 20 mV / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 500 ns / div

**Figure 20. CCM Switching (1.8 V)**

TYPICAL CHARACTERISTICS




(VIN = 5 V, VOUT = 1.8 V, IOUT = 3 A)  
 Upper Trace: Input Voltage, 5 V / div  
 Second Trace: Power Good Pin Voltage, 5 V / div  
 Third Trace: Output Voltage, 2 V / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 1 ms / div

**Figure 21. Power On from Input Voltage**



(VIN = 5 V, VOUT = 1.8 V, IOUT = 3 A)  
 Upper Trace: Input Voltage, 5 V / div  
 Second Trace: Power Good Pin Voltage, 5 V / div  
 Third Trace: Output Voltage, 2 V / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 200  $\mu$ s / div

**Figure 22. Power Off from Input Voltage**

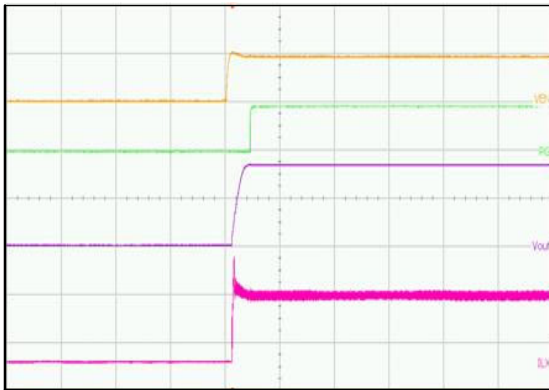


(VIN = 5 V, VOUT = 1.8 V, IOUT = 3 A, no CSS)  
 Upper Trace: Enable Pin Voltage, 5 V / div  
 Second Trace: Power Good Pin Voltage, 5 V / div  
 Third Trace: Output Voltage, 2 V / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 2 ms / div

**Figure 23. Power On from Enable**



(VIN = 5 V, VOUT = 1.8 V, IOUT = 3 A, CSS = 4.7 nF)  
 Upper Trace: Enable Pin Voltage, 5 V / div  
 Second Trace: Power Good Pin Voltage, 5 V / div  
 Third Trace: Output Voltage, 2 V / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 2 ms / div

**Figure 24. Power On from Enable CSS = 4.7 n**

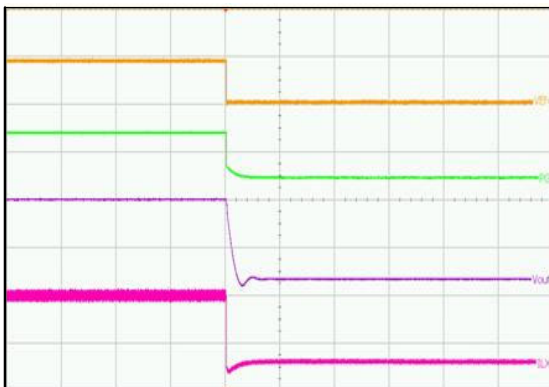

(VIN = 5 V, VOUT = 1.8 V, IOUT = 3 A)  
 Upper Trace: Enable Pin Voltage, 5 V / div  
 Second Trace: Power Good Pin Voltage, 5 V / div  
 Third Trace: Output Voltage, 2 V / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 200  $\mu$ s / div

**Figure 25. Power Off from Enable**



(VIN = 5 V, VOUT = 1.8 V, IOUT = Current Limit, no CSS)  
 Upper Trace: LX Pin Voltage, 5 V / div  
 Middle Trace: Output Voltage, 2 V / div  
 Lower Trace: Inductor Current, 2 A / div  
 Time = 500  $\mu$ s / div

**Figure 26. Short Circuit Operation**



**DETAILED DESCRIPTION****Overview**

The NCP1593 is a synchronous PWM controller that incorporates all the control and protection circuitry necessary to satisfy a wide range of applications. The NCP1593 employs current mode control to provide fast transient response, simple compensation, and excellent stability. The features of the NCP1593 include a precision reference, fixed 1 MHz switching frequency, a transconductance error amplifier, an integrated high-side P-channel MOSFET and low-side N-Channel MOSFET, internal soft-start, and very low shutdown current. The protection features of the NCP1593 include internal soft-start, pulse-by-pulse current limit, and thermal shutdown.

**Reference Voltage**

The NCP1593 incorporates an internal reference that allows output voltages as low as 0.6 V. The tolerance of the internal reference is guaranteed over the entire operating temperature range of the controller. The reference voltage is trimmed using a test configuration that accounts for error amplifier offset and bias currents.

**Oscillator Frequency**

A fixed precision oscillator is provided. The oscillator frequency range is 1 MHz with  $\pm 13\%$  variation.

**Transconductance Error Amplifier**

The transconductance error amplifier's primary function is to regulate the converter's output voltage using a resistor divider connected from the converter's output to the FB pin of the controller, as shown in the applications schematic. If a Fault occurs, the amplifier's output is immediately pulled to GND and PWM switching is inhibited.

**Soft-Start**

To limit the startup inrush current, a soft-start circuit is used to ramp up the reference voltage from 0 V to its final value linearly. This soft-start time is internally set to a typical value of 500  $\mu$ s, or it can be externally adjusted by adding a capacitor ( $C_{SS}$ ) from the SS pin to GND. The following formulas show how to set the externally adjustable soft-start time. The maximum allowable  $C_{SS}$  is 10 nF.

$$t_{SS} = \frac{(C_{SS} \times V_{FB})}{I_{SS}} \quad (\text{eq. 1})$$

Where:

$V_{FB}$ : Reference voltage, typically 0.6 V

$I_{SS}$ : Soft-start current, typically 0.7  $\mu$ A

**Output MOSFETs**

The NCP1593 includes low  $R_{DS(on)}$ , both high-side P-channel and low-side N-channel MOSFETs capable of delivering up to 3.0 A of current. When the controller is disabled or during a Fault condition, the controller's output stage is tri-stated by turning OFF both the upper and lower MOSFETs.

**Pulse Width Modulation**

A high-speed PWM comparator, capable of pulse widths as low as 35 ns, is included in the NCP1593. The inverting input of the comparator is connected to the output of the error amplifier. The non-inverting input is connected to the current sense signal. At the beginning of each PWM cycle, the CLK signal sets the PWM flip-flop and the upper MOSFET is turned ON. When the current sense signal rises above the error amplifier's voltage then the comparator will reset the PWM flip-flop and the upper MOSFET will be turned OFF.

**Current Sense**

The NCP1593 monitors the current in the upper MOSFET. The current signal is required by the PWM comparator and the pulse-by-pulse current limiter.

## PROTECTIONS

### Undervoltage Lockout (UVLO)

The under voltage lockout feature prevents the controller from switching when the input voltage is too low to power the internal power supplies and reference. Hysteresis is incorporated in the UVLO comparator to prevent resistive drops in the wiring or PCB traces from causing ON/OFF cycling of the controller during heavy loading at power up or power down.

### Overcurrent Protection (OCP)

NCP1593 detects high side switch current and then compares to a voltage level representing the overcurrent threshold limit. If the current through the high side FET exceeds the overcurrent threshold limit for seven consecutive switching cycles, overcurrent protection is triggered.

Once the overcurrent protection occurs, hiccup mode engages. First, hiccup mode, turns off both FETs and discharges the internal compensation network at the output of the OTA. Next, the IC waits typically  $4 \times t_{SS}$  ms and then resets the overcurrent counter. After this reset, the circuit attempts another normal soft-start. Hiccup mode reduces input supply current and power dissipation during a short circuit. It also allows for much improved system up-time, allowing auto-restart upon removal of a temporary short-circuit.

### Pre-Bias Startup

In some applications the controller will be required to start switching when it's output capacitors are charged anywhere from slightly above 0 V to just below the regulation voltage. This situation occurs for a number of reasons: the converter's output capacitors may have residual charge on them or the converter's output may be held up by a low current standby power supply. NCP1593 supports pre-bias start up by holding off switching off until the soft start ramp reaches the FB Pin voltage.

### Power Good

Power Good (PG) is an open-drain output that requires a pull-up resistor. It is actively held low in soft-start, standby, and shutdown. PG releases when the FB voltage and thus the output voltage rises above 90% of nominal regulation point. The PG goes low when the FB voltage falls below 85% of the regulation point.

### Thermal Shutdown

The NCP1593 protects itself from over heating with an internal thermal monitoring circuit. If the junction temperature exceeds the thermal shutdown threshold both the upper and lower MOSFETs will be shut OFF.

## APPLICATION INFORMATION

### Programming the Output Voltage

The output voltage is set using a resistive voltage divider from the output voltage to FB pin (see Figure 27). So the output voltage is calculated according to Eq.1.

$$V_{out} = V_{FB} \cdot \frac{R_1 + R_2}{R_2} \quad (\text{eq. 2})$$




Figure 27. Output divider

### Inductor Selection

The inductor is the key component in the switching regulator. The selection of inductor involves trade-offs among size, cost and efficiency. The inductor value is selected according to the equation 2.

$$L = \frac{V_{out}}{f \cdot I_{ripple}} \cdot \left( 1 - \frac{V_{out}}{V_{in(max)}} \right) \quad (\text{eq. 3})$$

Where  $V_{out}$  – the output voltage;

$f$  – switching frequency, 1.0 MHz;

$I_{ripple}$  – Ripple current, usually it's 20% – 30% of output current;

$V_{in(max)}$  – maximum input voltage.

Choose a standard value close to the calculated value to maintain a maximum ripple current within 30% of the maximum load current. If the ripple current exceeds this 30% limit, the next larger value should be selected.

The inductor's RMS current rating must be greater than the maximum load current and its saturation current should be about 30% higher. For robust operation in fault conditions (start-up or short circuit), the saturation current should be high enough. To keep the efficiency high, the series resistance (DCR) should be less than 0.1  $\Omega$ , and the core material should be intended for high frequency applications.

### Output Capacitor Selection

The output capacitor acts to smooth the dc output voltage and also provides energy storage. So the major parameter necessary to define the output capacitor is the maximum allowed output voltage ripple of the converter. This ripple is related to capacitance and the ESR. The minimum capacitance required for a certain output ripple can be calculated by Equation 4.

$$C_{OUT(min)} = \frac{I_{ripple}}{8 \cdot f \cdot V_{ripple}} \quad (\text{eq. 4})$$

Where  $V_{ripple}$  is the allowed output voltage ripple.

The required ESR for this amount of ripple can be calculated by equation 5.

$$ESR = \frac{V_{ripple}}{I_{ripple}} \quad (\text{eq. 5})$$

Based on Equation 3 to choose capacitor and check its ESR according to Equation 4. If ESR exceeds the value from Eq.4, multiple capacitors should be used in parallel.

Ceramic capacitor can be used in most of the applications. In addition, both surface mount tantalum and through-hole aluminum electrolytic capacitors can be used as well.

### Input Capacitor Selection

The input capacitor can be calculated by Equation 6.

$$C_{in(min)} = I_{out(max)} \cdot D_{max} \cdot \frac{1}{f \cdot V_{in(ripple)}} \quad (\text{eq. 6})$$

Where  $V_{in(ripple)}$  is the required input ripple voltage.

$$D_{max} = \frac{V_{out}}{V_{in(min)}} \text{ is the maximum duty cycle.} \quad (\text{eq. 7})$$

### Power Dissipation

The NCP1593 is available in a thermally enhanced 10-pin, DFN package. When the die temperature reaches +185°C, the NCP1593 shuts down (see the *Thermal-Overload Protection* section). The power dissipated in the device is the sum of the power dissipated from supply current (PQ), power dissipated due to switching the internal power MOSFET (P<sub>sw</sub>), and the power dissipated due to the RMS current through the internal power MOSFET (P<sub>ON</sub>). The total power dissipated in the package must be limited so the junction temperature does not exceed its absolute maximum rating of +150°C at maximum ambient temperature. Calculate the power lost in the NCP1593 using the following equations:

#### 1. High side MOSFET

The conduction loss in the top switch is:

$$P_{HS(on)} = I_{RMS\_HSFET}^2 \times R_{DS(on)HS} \quad (\text{eq. 8})$$

Where:

$$I_{RMS\_FET} = \sqrt{\left( I_{out}^2 + \frac{\Delta I_{PP}^2}{12} \right) \times D} \quad (\text{eq. 9})$$

$\Delta I_{PP}$  is the peak-to-peak inductor current ripple.

The power lost due to switching the internal power high side MOSFET is:

$$P_{HSSW} = \frac{V_{in} \cdot I_{out} \cdot (t_r + t_f) \cdot f_{SW}}{2} \quad (\text{eq. 10})$$

$t_r$  and  $t_f$  are the rise and fall times of the internal power MOSFET measured at SW node. Typical rise times are 4 ns (rising) and 2 ns (falling).

## 2. Low side MOSFET

The power dissipated in the top switch is:

$$P_{LSON} = I_{RMS\_LSFET}^2 \cdot R_{DS(on)LS} \quad (\text{eq. 11})$$

Where:

$$I_{RMS\_LSFET} = \sqrt{\left(I_{out}^2 + \frac{\Delta I_{PP}^2}{12}\right) \cdot (1 - D)} \quad (\text{eq. 12})$$

$\Delta I_{PP}$  is the peak-to-peak inductor current ripple.

The switching loss for the low side MOSFET can be ignored.

The power lost due to the quiescent current ( $I_Q$ ) of the device is:

$$P_Q = V_{in} \cdot I_Q \quad (\text{eq. 13})$$

$I_Q$  is the switching quiescent current of the NCP1593.

$$P_{TOTAL} = P_{HSON} + P_{HSSW} + P_{LSON} + P_Q \quad (\text{eq. 14})$$

Calculate the temperature rise of the die using the following equation:

$$T_J = T_C + (P_{TOTAL} \cdot \theta_{JA}) \quad (\text{eq. 15})$$

$\theta_{JC}$  is the junction-to-case thermal resistance equal to 68°C/W.  $T_A$  is the ambient temperature and  $T_J$  is the junction temperature, or die temperature. Solder the underside-exposed pad to a large copper GND plane. If the

die temperature reaches the thermal shutdown threshold the NCP1593 shut down and does not restart again until the die temperature cools by 30°C.

## Layout Consideration

As with all high frequency switchers, when considering layout, care must be taken in order to achieve optimal electrical, thermal and noise performance. For 1.0MHz switching frequency, switch rise and fall times are typically in few nanosecond range. To prevent noise both radiated and conducted the high speed switching current path must be kept as short as possible. Shortening the current path will also reduce the parasitic trace inductance of approximately 25 nH/inch. At switch off, this parasitic inductance produces a flyback spike across the NCP1593 switch. When operating at higher currents and input voltages, with poor layout, this spike can generate voltages across the NCP1593 that may exceed its absolute maximum rating. A ground plane should always be used under the switcher circuitry to prevent interplane coupling and overall noise.

The FB component should be kept as far away as possible from the switch node. The ground for these components should be separated from the switch current path. Failure to do so will result in poor stability or subharmonic like oscillation.

Board layout also has a significant effect on thermal resistance. Reducing the thermal resistance from ground pin and exposed pad onto the board will reduce die temperature and increase the power capability of the NCP1593. This is achieved by providing as much copper area as possible around the exposed pad. Adding multiple thermal vias under and around this pad to an internal ground plane will also help. Similar treatment to the inductor pads will reduce any additional heating effects.


# MECHANICAL CASE OUTLINE PACKAGE DIMENSIONS




SCALE 2:1

## DFN10, 3x3, 0.5P CASE 485C ISSUE F


DATE 16 DEC 2021

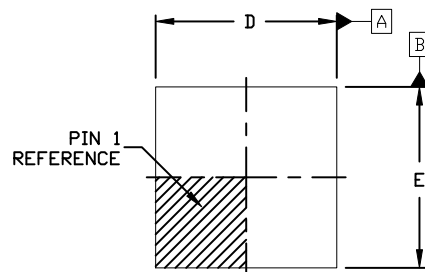

TOP VIEW

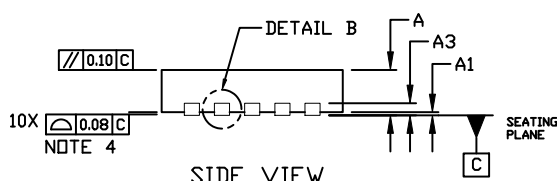


SIDE VIEW

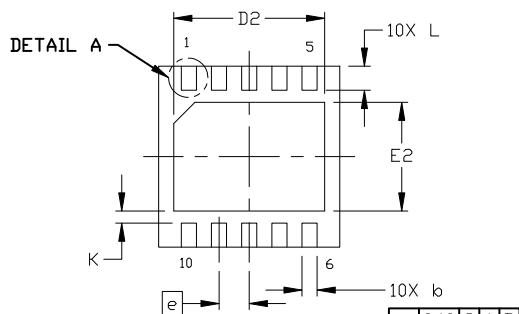

BOTTOM VIEW

### GENERIC MARKING DIAGRAM\*




XXXXX = Specific Device Code  
A = Assembly Location  
L = Wafer Lot  
Y = Year  
W = Work Week  
▪ = Pb-Free Package

(Note: Microdot may be in either location)

\*This information is generic. Please refer to device data sheet for actual part marking. Pb-Free indicator, "G" or microdot "▪", may or may not be present. Some products may not follow the Generic Marking.


### NOTES:

1. DIMENSION AND TOLERANCING PER ASME Y14.5, 2009.
2. CONTROLLING DIMENSION: MILLIMETERS
3. DIMENSION  $b$  APPLIES TO PLATED TERMINAL AND IS MEASURED BETWEEN 0.15 AND 0.30 MM FROM THE TERMINAL TIP.
4. COPLANARITY APPLIES TO THE EXPOSED PAD AS WELL AS THE TERMINALS.
5. TERMINAL  $b$  MAY HAVE MOLD COMPOUND MATERIAL ALONG SIDE EDGE. MOLD FLASH MAY NOT EXCEED 30 MICRONS ONTO BOTTOM SURFACE OF TERMINAL.
6. FOR DEVICE OPN CONTAINING W OPTION, DETAIL A AND DETAIL B ALTERNATE CONSTRUCTIONS ARE NOT APPLICABLE. WETTABLE FLANK CONSTRUCTION IS DETAIL B AS SHOWN ON SIDE VIEW OF PACKAGE.

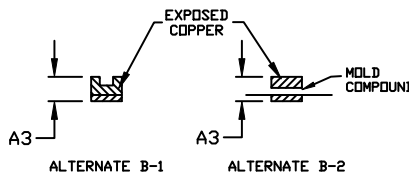


DETAIL B

ALTERNATE CONSTRUCTION




DETAIL B  
WETTABLE FLANK  
CONSTRUCTION



DETAIL A

ALTERNATE CONSTRUCTION

| DIM | MILLIMETERS |      |      |
|-----|-------------|------|------|
|     | MIN.        | NOM. | MAX. |
| A   | 0.80        | 0.90 | 1.00 |
| A1  | 0.00        | ---  | 0.05 |
| A3  | 0.20 REF    |      |      |
| b   | 0.18        | 0.23 | 0.30 |
| D   | 2.90        | 3.00 | 3.10 |
| D2  | 2.40        | 2.50 | 2.60 |
| E   | 2.90        | 3.00 | 3.10 |
| E2  | 1.70        | 1.80 | 1.90 |
| e   | 0.50 BSC    |      |      |
| K   | 0.20 REF    |      |      |
| L   | 0.30        | 0.40 | 0.50 |
| L1  | ---         | ---  | 0.03 |

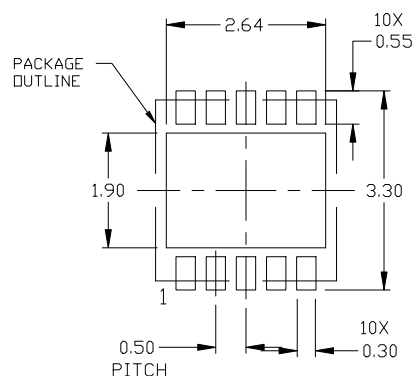

### RECOMMENDED MOUNTING FOOTPRINT

For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

|                  |                             |                                                                                                                                                                                  |
|------------------|-----------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| DOCUMENT NUMBER: | 98AON03161D                 | Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red. |
| DESCRIPTION:     | DFN10, 3X3 MM, 0.5 MM PITCH | PAGE 1 OF 1                                                                                                                                                                      |

onsemi and onsemi are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.

**onsemi**, **Onsemi**, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "**onsemi**" or its affiliates and/or subsidiaries in the United States and/or other countries. **onsemi** owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of **onsemi**'s product/patent coverage may be accessed at [www.onsemi.com/site/pdf/Patent-Marking.pdf](http://www.onsemi.com/site/pdf/Patent-Marking.pdf). **onsemi** reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and **onsemi** makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does **onsemi** assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using **onsemi** products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by **onsemi**. "Typical" parameters which may be provided in **onsemi** data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. **onsemi** does not convey any license under any of its intellectual property rights nor the rights of others. **onsemi** products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use **onsemi** products for any such unintended or unauthorized application, Buyer shall indemnify and hold **onsemi** and its officers, employees, subsidiaries, affiliates, and distributors harmless against all claims, costs, damages, and expenses, and reasonable attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized use, even if such claim alleges that **onsemi** was negligent regarding the design or manufacture of the part. **onsemi** is an Equal Opportunity/Affirmative Action Employer. This literature is subject to all applicable copyright laws and is not for resale in any manner.

## ADDITIONAL INFORMATION

### TECHNICAL PUBLICATIONS:

Technical Library: [www.onsemi.com/design/resources/technical-documentation](http://www.onsemi.com/design/resources/technical-documentation)  
onsemi Website: [www.onsemi.com](http://www.onsemi.com)

### ONLINE SUPPORT: [www.onsemi.com/support](http://www.onsemi.com/support)

For additional information, please contact your local Sales Representative at  
[www.onsemi.com/support/sales](http://www.onsemi.com/support/sales)