#### **ON Semiconductor**

#### Is Now



To learn more about onsemi™, please visit our website at www.onsemi.com

onsemi and ONSEMI. and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi product/patent coverage may be accessed at www.onsemi.com/site/pdf/Patent-Marking.pdf. onsemi reserves the right to make changes at any time to any products or information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/ or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use onsemi products for any such unintended or unauthorized application,

# MOSFET - Power, Single N-Channel, SO-8 FL 30 V, 3.4 m $\Omega$ , 71 A

### NVMFS4C306N

#### Features

- Low R<sub>DS(on)</sub> to Minimize Conduction Losses
- Low Capacitance to Minimize Driver Losses
- Optimized Gate Charge to Minimize Switching Losses
- AEC-Q101 Qualified and PPAP Capable
- NVMFS4C306NWF Wettable Flanks Option for Enhanced Optical Inspection
- These Devices are Pb-Free, Halogen Free/BFR Free and are RoHS Compliant

#### **Applications**

- Reverse Battery Protection
- DC-DC Converters Output Driver

#### MAXIMUM RATINGS (T<sub>J</sub> = 25°C unless otherwise stated)

Parameter		Symbol	Value	Unit	
Drain-to-Source Voltage			$V_{DSS}$	30	V
Gate-to-Source Voltage			$V_{GS}$	±20	V
Continuous Drain		T <sub>A</sub> = 25°C	I <sub>D</sub>	20.6	Α
Current R <sub>θJA</sub> (Notes 1, 2)		T <sub>A</sub> = 100°C		14.5	
Power Dissipation R <sub>θJA</sub> (Notes 1, 2)		T <sub>A</sub> = 25°C	P <sub>D</sub>	3	W
Continuous Drain Current R <sub>0</sub> JC (Notes 1, 2, 3)	Steady State	T <sub>C</sub> = 25°C	I <sub>D</sub>	71	Α
Continuous Drain Current R <sub>0JC</sub> (Notes 1, 2, 3)		T <sub>C</sub> = 100°C		50	
Power Dissipation R <sub>θJC</sub> (Notes 1, 2, 3)		T <sub>C</sub> = 25°C	P <sub>D</sub>	36.5	W
Pulsed Drain Current	$T_A = 25^{\circ}C, t_p = 10 \mu s$		I <sub>DM</sub>	166	Α
Operating Junction and Storage Temperature Range			T <sub>J</sub> , T <sub>STG</sub>	-55 to +175	°C
Source Current (Body Diode)			I <sub>S</sub>	28	Α
Single Pulse Drain-to-Source Avalanche Energy ( $T_J$ = 25°C, $V_{GS}$ = 10 V, $I_L$ = 37 $A_{pk}$ , $L$ = 0.1 mH, $R_{GS}$ = 25 $\Omega$ ) (Note 3)			E <sub>AS</sub>	68	mJ
Lead Temperature for Soldering Purposes (1/8" from case for 10 s)			TL	260	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.


- 1. Surface-mounted on FR4 board using 1 sq-in pad, 1 oz Cu.
- 2. Surface-mounted on FR4 board using the minimum recommended pad size.
- 3. Parts are 100% tested at  $T_J = 25^{\circ}C$ ,  $V_{GS} = 10$  V,  $I_L = 27$  Apk,  $E_{AS} = 36$  mJ.



#### ON Semiconductor®

#### www.onsemi.com

V <sub>(BR)DSS</sub>	R <sub>DS(ON)</sub> MAX	I <sub>D</sub> MAX
30 V	3.4 mΩ @ 10 V	71 A
30 V	4.8 mΩ @ 4.5 V	71 A





## MARKING DIAGRAM D S S XXXXXXX S AYWZZ G D

4C06N = Specific Device Code for NVMFS4C306N

4C06WF= Specific Device Code of NVMFS4C306NWF

A = Assembly Location

Y = Year
W = Work Week
ZZ = Lot Traceability

#### **ORDERING INFORMATION**

Device	Package	Shipping <sup>†</sup>
NVMFS4C306NT1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel
NVMFS4C306NWFT1G	SO-8 FL (Pb-Free)	1500 / Tape & Reel

†For information on tape and reel specifications, including part orientation and tape sizes, please refer to our Tape and Reel Packaging Specifications Brochure, BRD8011/D.

#### THERMAL RESISTANCE MAXIMUM RATINGS

Parameter	Symbol	Value	Unit
Junction-to-Case (Drain)	$R_{ heta JC}$	4.1	°C/W
Junction-to-Ambient - Steady State	$R_{ heta JA}$	49	C/VV

#### **ELECTRICAL CHARACTERISTICS** (T<sub>1</sub> = 25°C unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit
OFF CHARACTERISTICS						•	
Drain-to-Source Breakdown Voltage	V <sub>(BR)DSS</sub>	V <sub>GS</sub> = 0 V, I <sub>D</sub> = 250 μA		30			V
Drain-to-Source Breakdown Voltage (transient)	V <sub>(BR)DSSt</sub>	V <sub>GS</sub> = 0 V, I <sub>D(aval)</sub> = 12.6 A, T <sub>case</sub> = 25°C, t <sub>transient</sub> = 100 ns		34			٧
Drain-to-Source Breakdown Voltage Temperature Coefficient	V <sub>(BR)DSS</sub> /				14.4		mV/°C
Zero Gate Voltage Drain Current	I <sub>DSS</sub>	V <sub>GS</sub> = 0 V,	T <sub>J</sub> = 25°C			1.0	T .
	$V_{DS} = 24 \text{ V}$ $T_{J} = 125^{\circ}$		T <sub>J</sub> = 125°C			10	μΑ
Gate-to-Source Leakage Current	I <sub>GSS</sub>	$V_{DS} = 0 V, V_{GS}$	; = ±20 V			±100	nA
ON CHARACTERISTICS (Note 4)							
Gate Threshold Voltage	V <sub>GS(TH)</sub>	$V_{GS} = V_{DS}, I_{D}$	= 250 μΑ	1.3		2.1	V
Negative Threshold Temperature Coefficient	V <sub>GS(TH)</sub> /T <sub>J</sub>				3.8		mV/°0
Drain-to-Source On Resistance	R <sub>DS(on)</sub>	V <sub>GS</sub> = 10 V	I <sub>D</sub> = 30 A		2.8	3.4	mΩ
		V <sub>GS</sub> = 4.5 V	I <sub>D</sub> = 30 A		4.0	4.8	
Forward Transconductance	g <sub>FS</sub>	V <sub>DS</sub> = 1.5 V, I <sub>D</sub> = 15 A			58		S
Gate Resistance	$R_{G}$	T <sub>A</sub> = 25°C		0.3	1.0	2.0	Ω
CHARGES AND CAPACITANCES							
Input Capacitance	C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, f = 1 MHz, V <sub>DS</sub> = 15 V			1683		pF
Output Capacitance	C <sub>OSS</sub>				841		
Reverse Transfer Capacitance	C <sub>RSS</sub>				40		
Capacitance Ratio	C <sub>RSS</sub> /C <sub>ISS</sub>	V <sub>GS</sub> = 0 V, V <sub>DS</sub> = 15 V, f = 1 MHz			0.023		
Total Gate Charge	Q <sub>G(TOT)</sub>				11.6		
Threshold Gate Charge	Q <sub>G(TH)</sub>				2.6		1
Gate-to-Source Charge	$Q_{GS}$	$V_{GS} = 4.5 \text{ V}, V_{DS} = 15 \text{ V}; I_D = 30 \text{ A}$			4.7		nC
Gate-to-Drain Charge	$Q_{GD}$				4.0		
Gate Plateau Voltage	$V_{GP}$				3.1		V
Total Gate Charge	Q <sub>G(TOT)</sub>	V <sub>GS</sub> = 10 V, V <sub>DS</sub> = 15 V; I <sub>D</sub> = 30 A			26		nC
SWITCHING CHARACTERISTICS (Note 5)							
Turn-On Delay Time	t <sub>d(ON)</sub>	$V_{GS}$ = 4.5 V, $V_{DS}$ = 15 V, $I_{D}$ = 15 A, $R_{G}$ = 3.0 $\Omega$			10		
Rise Time	t <sub>r</sub>				32		ns
Turn-Off Delay Time	t <sub>d(OFF)</sub>				18		
Fall Time	t <sub>f</sub>				5.0		
Turn-On Delay Time	t <sub>d(ON)</sub>	$V_{GS}$ = 10 V, $V_{DS}$ = 15 V, $I_{D}$ = 15 A, $R_{G}$ = 3.0 $\Omega$			8.0		ns
Rise Time	t <sub>r</sub>				28		
Turn-Off Delay Time	t <sub>d(OFF)</sub>				24		
Fall Time	t <sub>f</sub>				3.0		

- 4. Pulse Test: pulse width  $\leq 300~\mu s$ , duty cycle  $\leq 2\%$ . 5. Switching characteristics are independent of operating junction temperatures.


#### **ELECTRICAL CHARACTERISTICS** ( $T_J = 25^{\circ}C$ unless otherwise specified)

Parameter	Symbol	Test Condition		Min	Тур	Max	Unit		
DRAIN-SOURCE DIODE CHARACTERISTICS									
Forward Diode Voltage	$V_{SD}$	V <sub>GS</sub> = 0 V, I <sub>S</sub> = 10 A	T <sub>J</sub> = 25°C		0.8	1.1	V		
			T <sub>J</sub> = 125°C		0.63				
Reverse Recovery Time	t <sub>RR</sub>	$V_{GS}$ = 0 V, dIS/dt = 100 A/ $\mu$ s, I <sub>S</sub> = 30 A			34				
Charge Time	ta				17		ns		
Discharge Time	t <sub>b</sub>				17				
Reverse Recovery Charge	$Q_{RR}$				22		nC		

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

<sup>4.</sup> Pulse Test: pulse width ≤ 300 μs, duty cycle ≤ 2%.
5. Switching characteristics are independent of operating junction temperatures.


#### **TYPICAL CHARACTERISTICS**



80 70  $V_{DS} = 5 V$ ID, DRAIN CURRENT (A) 60 50 40 30  $T_J = 25^{\circ}C$ 20  $T_J = 125^{\circ}C$ 10  $T_J = -55^{\circ}C$ 0 0.5 1.0 1.5 2.5 3.0 3.5 2.0 V<sub>GS</sub>, GATE-TO-SOURCE VOLTAGE (V)

Figure 1. On-Region Characteristics

Figure 2. Transfer Characteristics



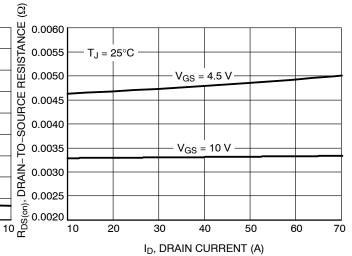



Figure 3. On-Resistance vs. Gate-to-Source Voltage

Figure 4. On-Resistance vs. Drain Current and Gate Voltage






Figure 5. On–Resistance Variation with Temperature

Figure 6. Capacitance Variation

#### **TYPICAL CHARACTERISTICS**

1000




Figure 7. Gate-to-Source and Drain-to-Source Voltage vs. Total Charge




Figure 8. Resistive Switching Time Variation vs. Gate Resistance




Figure 9. Diode Forward Voltage vs. Current




Figure 10. Maximum Rated Forward Biased Safe Operating Area




Figure 11. G<sub>FS</sub> vs. I<sub>D</sub>




Figure 12. Avalanche Characteristics

#### **TYPICAL CHARACTERISTICS**


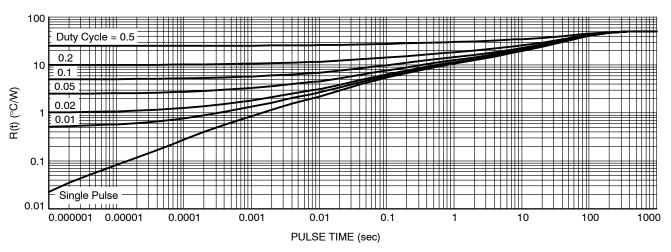


Figure 13. Thermal Response

#### PACKAGE DIMENSIONS

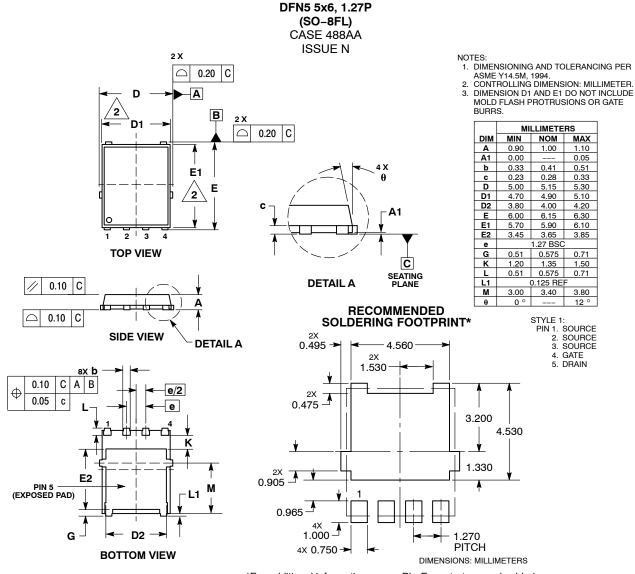

\*For additional information on our Pb-Free strategy and soldering details, please download the ON Semiconductor Soldering and Mounting Techniques Reference Manual, SOLDERRM/D.

ON Semiconductor and ware trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of ON Semiconductor's product/patent coverage may be accessed at <a href="https://www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using ON Semiconductor products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications information provided by ON Semiconductor. "Typical" parameters which may be provided in ON Semiconductor data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. ON Semiconductor does not convey any license under its patent rights nor the rights of others. ON Semiconductor products are not designed, intended, or authorized for use as a critical component in life support systems or any FDA Class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer purchase or use ON Semiconductor products for any such unintended or unauthorized application, Buyer shall indemnify a

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT:
Email Requests to: orderlit@onsemi.com

ON Semiconductor Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative