





T-3/4 2.50x2.00 CASE 100EJ ISSUE O

**DATE 14 SEP 2023** 


## NOTES:

- 1. CONTROLLING DIMENSIONS: MILLIMETERS
- 2. DIMENSIONS DO NOT INCLUDE MOLD FLASH OR BURRS.
- 3. 2MM YOKE DETECTOR.

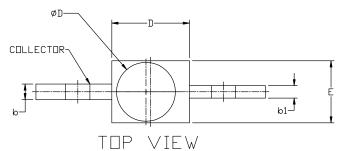

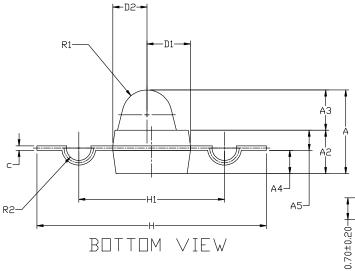

DIM	MILLIMETERS			
	MIN.	N□M.	MAX.	
А	2,500	2,700	2,900	
A2	1,300	1.400	1,500	
А3	1.200	1.300	1.400	
Α4	0.650	0.750	0.850	
A5	0.550	0.650	0.750	
b	0.450	0.550	0.650	
b1	0,350	0.450	0,550	
С	0.100	0.150	0.200	
D	2.300	2.500	2.700	
D1	1.200	1.400	1.600	
D2	0.900	1.100	1.300	
E	1.800	2.000	2,200	
Н	7.200	7,400	7.600	
H1	4.500	4.700	4.900	
ØD	1.700	1.900	2.100	
R1	0.700	0.800	0.900	
R2	0.300	0.400	0.500	

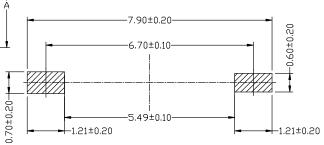

RECOMMENDED MOUNTING FOOTPRINT\*

\*FOR ADDITIONAL INFORMATION ON OUR P6-FREE
STRATEGY AND SOLDERING DETAILS, PLEASE DOWNLOAD
THE ON SEMICONDUCTOR SOLDERING AND MOUNTING
TECHNIQUES REFERENCE MANUAL, SOLDERRM/D.

DOCUMENT NUMBER:	98AON57120H	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	T-3/4 2.50x2.00		PAGE 1 OF 1	

onsemi and ONSEMI are trademarks of Semiconductor Components Industries, LLC dba onsemi or its subsidiaries in the United States and/or other countries. onsemi reserves the right to make changes without further notice to any products herein. onsemi makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. onsemi does not convey any license under its patent rights nor the rights of others.